

11-17-00

A

Please type a plus sign (+) inside this box →

+

PTO/SB/05 (08-00) (modified)

Approved for use through 9/30/2001, OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

+

UTILITY

PATENT APPLICATION TRANSMITTAL

(only for new nonprovisional applications under
37 CFR 1.53(b))

Attorney Docket Number 5202 US

First Named Inventor Guttman

Title Client Side, Web-Based Spreadsheet

Express Mail Label No. EL482472107US

PTO
11/15/00
11/15/00

APPLICATION ELEMENTS

1. ☒ Fee Transmittal Form (in duplicate)
2. ☐ Applicant claims small entity status.
See 37 CFR 1.27
3. ☒ Specification Total Pages **133**
(preferred arrangement set forth below)
 - Descriptive Title of the Invention
 - Cross Reference(s) to Related Case(s)
 - Statement Regarding Fed sponsored R & D
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawing(s)
 - Detailed Description
 - Claim or Claims
 - Abstract of the Disclosure
4. ☒ Drawing(s) (35 U.S.C. Total Sheets **32**
113)
5. Oath or Declaration
 - a. ☒ New Declaration Total Pages **3-**
☐ Executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).
6. ☐ Application Data Sheet. See 37 CFR 1.76

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ Certified Copy of Priority Document(s) (if foreign priority
is claimed)
9. ☒ Information Disclosure Statement & PTO-1449
☒ Copies of IDS Citation(s) (3 references)
10. ☐ Preliminary Amendment
11. ☒ Return Postcard
12. ☐
13. ☐
14. ☐
15. ☐
16. ☐

ADDRESS TO:

Box Patent Application
Commissioner for Patents
Washington, D.C. 20231

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information below and in a preliminary amendment or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: ____/____

Prior application information: Examiner: _____ Group/Art Unit: _____

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuing or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label (Insert Customer No. or
Attach bar code label here) Or ☐ Correspondence
address below

NAME	Laura A. Majerus, Fenwick & West LLP				
ADDRESS	Two Palo Alto Square				
CITY	Palo Alto	STATE	CA	ZIP CODE	94306
COUNTRY	U.S.A.	TELEPHONE	(650) 858-7152	FAX	(650) 494-1417
Name (Print/Type)	Laura A. Majerus		Registration No. (Attorney/Agent)	33,417	
Signature	<i>Laura Majerus</i>		Date	November 15, 2000	

0002/PTO(modified) Rev. 10/2000	U.S. Department of Commerce Patent and Trademark Office	Complete if Known	
FEE TRANSMITTAL TOTAL AMOUNT OF PAYMENT Subtotal (1) + Subtotal (2) + Subtotal (3) = (\$)		Application Number	To Be Assigned
		Filing Date	Herewith
		First Named Inventor	Guttman
		Group Art Unit	To Be Assigned
		Examiner Name	To Be Assigned
		Attorney Docket Number	5202 US

METHOD OF PAYMENT	FEE CALCULATION (continued)																																																																																								
1. The Commissioner is hereby authorized to: <input type="checkbox"/> Charge the indicated fees to the below mentioned deposit account. <input checked="" type="checkbox"/> Charge any additional fee required under 37 CFR 1.16 - 1.21 or credit any over payments to the below mentioned deposit account. † <input type="checkbox"/> Applicant claims small entity status See 37 CFR 1.27 Deposit Account Number: 19-2555 Deposit Account Name: FENWICK & WEST LLP A Duplicate Copy of this authorization is attached 2. <input checked="" type="checkbox"/> Payment Enclosed: <input checked="" type="checkbox"/> Check <input type="checkbox"/> Credit Card <input type="checkbox"/> Other	3. ADDITIONAL FEES <table style="width:100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;"><u>Large Entity</u> Fee Code/Fee</th> <th style="text-align: left;"><u>Small Entity</u> Fee Code/Fee</th> <th style="text-align: left;">Fee Description</th> <th style="text-align: right;">Fee Due</th> </tr> </thead> <tbody> <tr><td>105/\$130</td><td>205/\$65</td><td>Surcharge - late filing fee or oath</td><td style="text-align: right;">[]</td></tr> <tr><td>127/\$50</td><td>227/\$25</td><td>Surcharge-late provisional filing fee or cover sheet</td><td style="text-align: right;">[]</td></tr> <tr><td>147/\$2,520</td><td>147/\$2,520</td><td>For filing a request for reexamination</td><td style="text-align: right;">[]</td></tr> <tr><td>115/\$110</td><td>215/\$55</td><td>Extension for response within first month†</td><td style="text-align: right;">[]</td></tr> <tr><td>116/\$390</td><td>216/\$195</td><td>Extension for response within second month†</td><td style="text-align: right;">[]</td></tr> <tr><td>117/\$890</td><td>217/\$445</td><td>Extension for response within third month†</td><td style="text-align: right;">[]</td></tr> <tr><td>118/\$1,390</td><td>218/\$695</td><td>Extension for response within fourth month†</td><td style="text-align: right;">[]</td></tr> <tr><td>128/\$1,890</td><td>228/\$945</td><td>Extension for response within fifth month†</td><td style="text-align: right;">[]</td></tr> <tr><td>119/\$310</td><td>219/\$155</td><td>Notice of Appeal</td><td style="text-align: right;">[]</td></tr> <tr><td>141/\$1,240</td><td>241/\$620</td><td>Petition to revive unintentionally abandoned application</td><td style="text-align: right;">[]</td></tr> <tr><td>142/\$1,240</td><td>242/\$620</td><td>Utility Issue Fee (Or Reissue)</td><td style="text-align: right;">[]</td></tr> <tr><td>143/\$440</td><td>243/\$220</td><td>Design Issue Fee</td><td style="text-align: right;">[]</td></tr> <tr><td>122/\$130</td><td>122/\$130</td><td>Petitions to the Commissioner</td><td style="text-align: right;">[]</td></tr> <tr><td>126/\$180</td><td>126/\$180</td><td>Submission of Information Disclosure Statement</td><td style="text-align: right;">[]</td></tr> <tr><td>179/\$710</td><td>279/\$355</td><td>Request for Continued Examination (RCE)</td><td style="text-align: right;">[]</td></tr> <tr><td>581/\$40</td><td>581/\$40</td><td>Recording each patent assignment per property (times number of properties)</td><td style="text-align: right;">[]</td></tr> <tr><td>146/\$710</td><td>246/\$355</td><td>Filing a submission after final rejection (37 CFR 1.129(a))</td><td style="text-align: right;">[]</td></tr> <tr><td>149/\$710</td><td>249/\$355</td><td>For each additional invention to be examined (37 CFR 1.129(b))</td><td style="text-align: right;">[]</td></tr> <tr><td colspan="3">Other fee (specify):</td><td style="text-align: right;">[]</td></tr> <tr><td colspan="3">Other fee (specify):</td><td style="text-align: right;">[]</td></tr> <tr> <td colspan="3" style="text-align: right;">SUBTOTAL (3)</td> <td style="text-align: right;">(\$) 0.00</td> </tr> </tbody> </table>	<u>Large Entity</u> Fee Code/Fee	<u>Small Entity</u> Fee Code/Fee	Fee Description	Fee Due	105/\$130	205/\$65	Surcharge - late filing fee or oath	[]	127/\$50	227/\$25	Surcharge-late provisional filing fee or cover sheet	[]	147/\$2,520	147/\$2,520	For filing a request for reexamination	[]	115/\$110	215/\$55	Extension for response within first month†	[]	116/\$390	216/\$195	Extension for response within second month†	[]	117/\$890	217/\$445	Extension for response within third month†	[]	118/\$1,390	218/\$695	Extension for response within fourth month†	[]	128/\$1,890	228/\$945	Extension for response within fifth month†	[]	119/\$310	219/\$155	Notice of Appeal	[]	141/\$1,240	241/\$620	Petition to revive unintentionally abandoned application	[]	142/\$1,240	242/\$620	Utility Issue Fee (Or Reissue)	[]	143/\$440	243/\$220	Design Issue Fee	[]	122/\$130	122/\$130	Petitions to the Commissioner	[]	126/\$180	126/\$180	Submission of Information Disclosure Statement	[]	179/\$710	279/\$355	Request for Continued Examination (RCE)	[]	581/\$40	581/\$40	Recording each patent assignment per property (times number of properties)	[]	146/\$710	246/\$355	Filing a submission after final rejection (37 CFR 1.129(a))	[]	149/\$710	249/\$355	For each additional invention to be examined (37 CFR 1.129(b))	[]	Other fee (specify):			[]	Other fee (specify):			[]	SUBTOTAL (3)			(\$) 0.00
<u>Large Entity</u> Fee Code/Fee	<u>Small Entity</u> Fee Code/Fee	Fee Description	Fee Due																																																																																						
105/\$130	205/\$65	Surcharge - late filing fee or oath	[]																																																																																						
127/\$50	227/\$25	Surcharge-late provisional filing fee or cover sheet	[]																																																																																						
147/\$2,520	147/\$2,520	For filing a request for reexamination	[]																																																																																						
115/\$110	215/\$55	Extension for response within first month†	[]																																																																																						
116/\$390	216/\$195	Extension for response within second month†	[]																																																																																						
117/\$890	217/\$445	Extension for response within third month†	[]																																																																																						
118/\$1,390	218/\$695	Extension for response within fourth month†	[]																																																																																						
128/\$1,890	228/\$945	Extension for response within fifth month†	[]																																																																																						
119/\$310	219/\$155	Notice of Appeal	[]																																																																																						
141/\$1,240	241/\$620	Petition to revive unintentionally abandoned application	[]																																																																																						
142/\$1,240	242/\$620	Utility Issue Fee (Or Reissue)	[]																																																																																						
143/\$440	243/\$220	Design Issue Fee	[]																																																																																						
122/\$130	122/\$130	Petitions to the Commissioner	[]																																																																																						
126/\$180	126/\$180	Submission of Information Disclosure Statement	[]																																																																																						
179/\$710	279/\$355	Request for Continued Examination (RCE)	[]																																																																																						
581/\$40	581/\$40	Recording each patent assignment per property (times number of properties)	[]																																																																																						
146/\$710	246/\$355	Filing a submission after final rejection (37 CFR 1.129(a))	[]																																																																																						
149/\$710	249/\$355	For each additional invention to be examined (37 CFR 1.129(b))	[]																																																																																						
Other fee (specify):			[]																																																																																						
Other fee (specify):			[]																																																																																						
SUBTOTAL (3)			(\$) 0.00																																																																																						
FEE CALCULATION (fees effective 10/01/2000) 1. FILING FEE <table style="width:100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;"><u>Large Entity</u> Fee Code/Fee</th> <th style="text-align: left;"><u>Small Entity</u> Fee Code/Fee</th> <th style="text-align: left;">Fee Description</th> <th style="text-align: right;">Fee Due</th> </tr> </thead> <tbody> <tr><td>101/\$710</td><td>201/\$355</td><td>Utility Filing</td><td style="text-align: right;">710</td></tr> <tr><td>106/\$320</td><td>206/\$160</td><td>Design Filing</td><td style="text-align: right;">[]</td></tr> <tr><td>108/\$710</td><td>208/\$355</td><td>Reissue</td><td style="text-align: right;">[]</td></tr> <tr><td>114/\$150</td><td>214/\$75</td><td>Provisional Filing</td><td style="text-align: right;">[]</td></tr> <tr> <td colspan="3" style="text-align: right;">SUBTOTAL (1)</td> <td style="text-align: right;">(\$) 710.00</td> </tr> </tbody> </table>	<u>Large Entity</u> Fee Code/Fee	<u>Small Entity</u> Fee Code/Fee	Fee Description	Fee Due	101/\$710	201/\$355	Utility Filing	710	106/\$320	206/\$160	Design Filing	[]	108/\$710	208/\$355	Reissue	[]	114/\$150	214/\$75	Provisional Filing	[]	SUBTOTAL (1)			(\$) 710.00																																																																	
<u>Large Entity</u> Fee Code/Fee	<u>Small Entity</u> Fee Code/Fee	Fee Description	Fee Due																																																																																						
101/\$710	201/\$355	Utility Filing	710																																																																																						
106/\$320	206/\$160	Design Filing	[]																																																																																						
108/\$710	208/\$355	Reissue	[]																																																																																						
114/\$150	214/\$75	Provisional Filing	[]																																																																																						
SUBTOTAL (1)			(\$) 710.00																																																																																						
2. CLAIMS <table style="width:100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;"><u>Large Entity</u> Fee Code/Fee</th> <th style="text-align: left;"><u>Small Entity</u> Fee Code/Fee</th> <th style="text-align: left;">Fee Description</th> </tr> </thead> <tbody> <tr><td>103/\$18</td><td>203/\$9</td><td>Claims in excess of 20</td></tr> <tr><td>102/\$80</td><td>202/\$40</td><td>Independent claims in excess of 3</td></tr> <tr><td>104/\$270</td><td>204/\$135</td><td>Multiple dependent claim</td></tr> <tr><td>109/\$80</td><td>209/\$40</td><td>Reissue independent claims over original patent</td></tr> <tr><td>110/\$18</td><td>210/\$9</td><td>Reissue claims in excess of 20 and over original patent</td></tr> </tbody> </table>	<u>Large Entity</u> Fee Code/Fee	<u>Small Entity</u> Fee Code/Fee	Fee Description	103/\$18	203/\$9	Claims in excess of 20	102/\$80	202/\$40	Independent claims in excess of 3	104/\$270	204/\$135	Multiple dependent claim	109/\$80	209/\$40	Reissue independent claims over original patent	110/\$18	210/\$9	Reissue claims in excess of 20 and over original patent																																																																							
<u>Large Entity</u> Fee Code/Fee	<u>Small Entity</u> Fee Code/Fee	Fee Description																																																																																							
103/\$18	203/\$9	Claims in excess of 20																																																																																							
102/\$80	202/\$40	Independent claims in excess of 3																																																																																							
104/\$270	204/\$135	Multiple dependent claim																																																																																							
109/\$80	209/\$40	Reissue independent claims over original patent																																																																																							
110/\$18	210/\$9	Reissue claims in excess of 20 and over original patent																																																																																							

(Col. 1)		(Col. 2)		(Col. 3)					
For	No. of Existing Claims		Highest No. Previously Paid For		Extra**		Fee		Fee Due
TOTAL	56	minus*	20 or 0	=	36	x	18	=	648
INDEP	4	minus*	3 or 0	=	1	x	80	=	80
[] First presentation of multiple dependent claim									= 728

* Subtract the greater number of Col. 2

** If the difference between Col. 1 and Col. 2 is less than zero, then enter "0" in Col. 3

SUBTOTAL (2) (\$)

SUBMITTED BY		Complete (if applicable)	
Typed or Printed Name	Laura A. Majerus	Reg. Number	33,417
Signature	<i>Laura Majerus</i>	Date	November 15, 2000

† Request for Extension of Time per 37 CFR 1.136 (a)(3) made hereby
Rev. 09/30/2000

PATENT APPLICATION

CLIENT SIDE, WEB-BASED SPREADSHEET

OF

Steve Guttman

Joe Ternasky

Prepared by:

**Fenwick & West LLP
Two Palo Alto Square
Palo Alto, CA 94306
(650) 494-0600**

DOCKET NO. 22233.05202

Express Mail Number EL482472107US

CLIENT SIDE, WEB-BASED SPREADSHEET

Inventors: Steve Guttman and Joe Ternasky

5 Related Applications

 This application claims priority under 35 U.S.C. § 119(e) to U.S. Provisional Application No.60/241,083, entitled: Client Side, Web Based Calculator” of Steve Guttman and Joe Ternasky, filed October 16, 2000, which is herein incorporated by reference.

10 This application is related to U.S. Application No. _____, entitled “Client Side, Web-Based Calculator” of Steve Guttman and Joe Ternasky, filed November 15, 2000, which is herein incorporated by reference.

15 Background of the Invention

 The present invention relates generally to dynamic hypertext markup language (DHTML) web pages and, more specifically, to a method for creating and viewing a spreadsheet web page.

20 Traditional spreadsheets and ledgers are large sheets of paper with columns and rows that accountants use to detail sets of business transactions such as expenses and revenues. A spreadsheet lays out a comprehensive set of numerical values and calculations on a single sheet of paper.

25 Conventional electronic spreadsheets are implemented as a standalone program executed on a data processor. A desktop electronic spreadsheet is a spreadsheet that executes on a standalone desktop computer and organizes information into columns and rows within an electronic ledger. Like its physical counterpart, a desktop electronic spreadsheet can add and view data to help explore business issues. An advantage of the electronic version of a spreadsheet is that data can be added by "formula" instead of by hand. Thus, when a number is changed in

an electronic spreadsheet cell, the effect on the entire scenario can be seen immediately.

Ever since early electronic spreadsheets, such as Visicalc, desktop electronic spreadsheets have been used to organize and tabulate data. A currently popular spreadsheet is Microsoft's Excel 2000 spreadsheet, which allows the user to enter data into "cells" of the spreadsheet and to tabulate and organize those cells. While Excel 2000 allows the user to enter, for example, a link to the World Wide Web ("the web") into a cell, Excel and most desktop spreadsheet applications are not designed with the web in mind. What is needed is a spreadsheet that allows users to make full use of the capabilities of the web and to include data only available via the web.

Summary of the Invention

A described embodiment of the present invention allows a designer to create "spreadsheet" web pages, which can then be viewed and used by the designer and/or by others. Many people want to use spreadsheets, but only a small percentage actually want to create them. It will be understood that, in the paragraphs that follow, the term "designer" is generally used to refer to the person who created and designed a web-based spreadsheet, while the term "user" generally refers to a person who views or uses the web-based spreadsheet. Some people can be both designer and user. The described embodiments of the present invention allow people to collaborate and to share spreadsheets over the web. The described embodiments allow a user of the spreadsheet to email the spreadsheet to others and to embed the spreadsheet into web pages owned by the user or by third parties.

An embodiment of the web-based spreadsheet allows the user to specify both web data and real-time data in the cells of the spreadsheet. A described embodiment of the present invention allows the spreadsheet designer to enter a URL of an image stored on a network, such as the Internet. The image is then fetched and placed in a cell. The described embodiment also allows the spreadsheet designer to enter a URL of a web page into a cell. Furthermore, the described embodiment allows the spreadsheet designer to specify real-time data, such as stock quotes or currency conversion information, in the

cells of the spreadsheet. Such a cell will reflect a current (or specified) day's stock quote or a current (or specified) currency conversion value.

Moreover, the described embodiment allows the user to specify "macros" that enlarge the functionality of the web-based spreadsheet.

Advantages of the invention will be set forth in part in the description which follows and in part will be apparent from the description or may be learned by practice of the invention. The objects and advantages of the invention will be realized and attained by means of the elements and combinations particularly pointed out in the appended claims and equivalents.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of this specification, show several embodiments of the invention and, together with the description, serve to explain the principles of the invention.

Fig. 1 is a block diagram of a network environment in which the present invention can be implemented.

Fig. 2 shows an empty web-based spreadsheet in accordance with a described embodiment of the present invention.

Fig. 3 is a flow chart showing a method performed by a server of Fig. 1.

Fig. 4 is a flow chart showing a method performed on a client of Fig. 1 to obtain spreadsheet data from the server of Fig. 1.

Fig. 5 is a flow chart showing a method performed on the client of Fig. 1 to display a web-based spreadsheet.

Fig. 6 shows the web-based spreadsheet of Fig. 2 showing a drop down menu of web data and real-time data that can be inserted in the web-based spreadsheet.

Fig. 7(a) shows an example of adding a web-based image to the web-based spreadsheet.

Fig. 7(b) shows the result of adding a web-based image to the web-based spreadsheet.

Fig. 7(c) shows the result of right clicking on a cell containing the web-based image.

Fig. 7(d) shows an example in which the vertical size of the cell containing the web-based image is increased.

Fig. 8(a) shows an example of adding a real-time stock quote to the web-based spreadsheet.

5 Fig. 8(b) shows an intermediate step while the real-time stock quote data is being loaded.

Fig. 8(c) shows the result of adding real-time stock quote data to the web-based spreadsheet.

10 Fig. 9(a) shows an example of adding a hypertext link to the web-based spreadsheet.

Fig. 9(b) shows the result of adding the hypertext link to the web-based spreadsheet.

Fig. 10(a) shows an example of adding a real-time currency value to the web-based spreadsheet.

15 Fig. 10(b) shows the result of adding the real-time currency value to the web-based spreadsheet.

Fig. 11 shows an example of a cell that contains the sum of two other cells.

Figs. 12(a)-12(e) show examples of drop down menus used in a described embodiment of a web-based spreadsheet in accordance with the present invention.

20 Fig. 13(a) shows an example window enabling a user to email a spreadsheet.

Fig. 13(b) shows an example email used to send a link to a spreadsheet.

Figs. 14(a)-14(d) show an example spreadsheet created and viewed in accordance with the present invention and including macros.

25 Fig. 15 shows a process of allowing a web page user to embed a spreadsheet in any web page.

Fig. 16(a) is a flow chart showing a log in process.

Fig. 16(b) is a flow chart showing a process of saving data into "My Files."

Fig. 16(c) shows a "My Files" page containing saved files.

Fig. 17(a) shows a format of a member file.

30 Fig. 17(b) shows a format of a datafile.

Fig. 18 shows an example of a web-based spreadsheet containing real-time data.

Detailed Description of Embodiments

Reference will now be made in detail to several embodiments of the present invention, examples of which are shown in the accompanying drawings. Wherever practicable, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

1. System

A described embodiment of the present invention allows a spreadsheet designer to include web data and real-time data in a web-based spreadsheet. The data used in the web-based spreadsheet is preferably stored on a server data processing system and is sent to a user's browser in response to a user request. Thus, a web-based spreadsheet in accordance with the present invention can be viewed from any or device having browser capability. The user does not have to be tied to a spreadsheet stored on a desktop. The described embodiment of the present invention is written entirely in Dynamic HTML and thus does not require any special downloads, plug-ins or Java. After loading, the spreadsheet will execute equally fast with a 28.8 KBPS connection or a T3. In the described embodiment, a user will always have the most current version of the program - just as he always has the most recent version of any web page he chooses to view. Because it is web-based, the described embodiment will not cause any installation problems and cannot create DLL conflicts. The files describing the web-based spreadsheet are stored on secure servers, so a user never needs to worry about backing up data, and can access his files from any web-connected computer.

Fig. 1 is a block diagram of a network environment in which the present invention can be implemented. The figure includes a client device 102, such as a computer, data processing system network appliance, television-based browsing device, wireless telephone, or other wireless device. The figure also shows a server data processing system 104. In the described embodiment, a web-based spreadsheet is created and displayed from within a user's browser 110 on client device 102 using functionality carried in a spreadsheet page 112 received from the server data processing machine 104. The contents of Data Array 114 is also included within the spreadsheet web page 112.

Server data processing system 104 includes server software 120, which implements functionality of the server, and a spreadsheet datafile 122 that contains information needed to create spreadsheet page 112. In some implementations, spreadsheets of multiple users are stored in a central repository on server 104. In such
5 embodiments, server 104 also includes a member file 126 listing all the designers who have created and stored web-based spreadsheets and listing all users who have registered to gain access to the web-based spreadsheets. Certain other embodiments do not include a central repository and do not require or use member files.

The member file 126 includes information for all members who have an account
10 with the system. Initially, when a user logs into the system, he is asked whether he has an account. If the user is a member, he is allowed to access the system. In the alternative, if the user is not a member, he is prompted to enter his identifying information, which might include a password and user ID.

Fig. 1 includes a source of real-time data 108, which is coupled to network 106.
15 Dotted line 107 indicates a path of real-time data from source 108, to server 104, to client 102.

A Member file includes information for all members who have an account with the system. Initially, when a user logs into the system, he is asked whether he is a member who has an account with the system. If the user is a member, he is allowed to
20 access the system. In the alternative, if the user is not a member, he is offered to enter his identifying information, which might include a password and email address.

The Spreadsheet /Calculator data file contains information related to spreadsheets and calculators. Such information may include a data ID, which refers to a file name, and information for each individual cell of a spreadsheet/calculator. In particular, the cell
25 information related to each individual cell includes, but is not limited to, the information related to cell dependency, formatting, content, and editability. The server software manages the files and communicates with the browser. The server software handles opening, saving, and incorporating live data (such as stock quotes) into the files. In addition, the server software returns the HTML page and calculator page in response to a
30 request received from the client system, via a browser.

0051031.3

The client system includes browser software and a Data Array. The user, via the browser, sends a request to the server for an HTML page. The server software reviews the parameters received with the request. If the parameters include a “spreadsheet” mode, a spreadsheet HTML page is returned to the client. In the alternative, if the parameters include a “calculator” mode, the server returns the calculator HTML page. If the parameters include an “embed” mode, the server returns a fully formed calculator web page. The Data Array is an array of cell descriptions whose values are loadable from JavaScript in the HTML page. The Data Array contains information related to each individual cell, which includes, but is not limited, to cell dependency, formatting, content, and editability. When the designer/creator saves a file, client turns the definition of each cell into a string. The concatenated cell strings define the entire spreadsheet. Client sends the concatenated string to the server. The server takes the string and writes it into the Spreadsheet/Calculator Data File. Thus, a client-format Data Array is translated into Spreadsheet/Calculator Data File in the server file format.

15 The browser is software effecting the requesting and displaying of HTML web pages. The browser software can be standalone or integrated within other software products. It should be understood that each of clients and web servers in the described embodiment preferably includes a processor and a memory. The memory includes instructions capable of being executed by the processor to perform the functions described below. The server can also include a computer readable medium for storing the instructions. The server system communicates with the client system via any appropriate communication mechanism, including but not limited to, a network, an intranet, the Internet, wireless communications, telecommunications, cable modems, and satellite communications.

25 Fig. 17(a) shows a block diagram showing a Member file 1712 and an example member record 1700. The Member file 1712 keeps member information in the form of member records 1700. The member record 1700 identifies a particular member. In one embodiment of the present invention, the example member record may have the following fields: a member ID, a password, an email address, and a data ID, which refers to a file name. The example record 800 features a member ID equal to ANNA, 0124 as a password, ANNA@HOTMAIL.COM as an email address, and “Make the Ultimate

Holiday Dinner” as a file name. When a user initially signs up with the system, all user information is stored in the member file 1712.

Referring to Fig. 1, server 104 creates spreadsheet page 112 in response to a request from browser 110. The spreadsheet page 112 is sent across a network 106 and stored in the user’s browser 110. Thus, no special software, aside from standard browser 110, is required to execute the functionality of the web-based spreadsheet. The Spreadsheet data file 122 contains information related to spreadsheets. Such information may include a data ID, which refers to the name of a spreadsheet, and information for each individual cell of a spreadsheet. In particular, the cell information related to each individual cell includes, but is not limited to, the information related to cell dependency, formatting, content, and editability. The server software 120 manages the files and communicates with the browser. The server software 120 also handles opening, saving, and incorporating live data (such as stock quotes and currency conversion information) into the files. In addition, the server software 120 returns the spreadsheet page 112 in response to a request received from the client system’s browser 110.

In the described embodiment, the functionality of the spreadsheet is implemented using Javascript included in spreadsheet web page 112. The use of Javascript ensures that the spreadsheet will be usable in any browser 110 that is capable of executing Javascript. Use of Javascript also ensures that the spreadsheet web page 112 will pass though any firewall and also avoids the problems inherent in upgrading to a newer version of the spreadsheet functionality, since the functionality is re-loaded with each spreadsheet web page 112.

Fig. 17(b) is a block diagram showing a Spreadsheet data file 1716 and an example record 1750. The Spreadsheet data file 1716 keeps spreadsheet data. The same data file is used to generate spreadsheet page 112. In particular, data file 1716 contains a user name or ID, a data ID (for example, a file name) and information about each cell in the spreadsheet. The information for every cell may include, for example, value, formula, formatting, editability, and borders. Each data array file 114 and spreadsheet data file 122 includes an editability flag for each cell, which is assigned a “FALSE” or “TRUE” logic value. This value indicates whether a certain cell is editable or not. If the cell has a “TRUE” value, i.e., if it is locked, a user cannot edit that cell when viewing the

spreadsheet. Alternatively, if the cell has a "FALSE" value, i.e., if it is unlocked, that cell can be edited when viewing the spreadsheet. Fig. 17(b) features the example record 1750 having the following fields: User Name = ANNA, Data ID= "Make the Ultimate Holiday Dinner," and information about each cell. In particular, cell A3 which includes the text "HOW MANY TOTAL GUESTS ARE THE USER HAVING?" is described by the following parameters: {ENTRY:'HOW MANY TOTAL GUESTS ARE THE USER HAVING?',LOCKED:'FALSE',VIEWSIZE:'9PT',FORECOLOR:'NAVY',VIEWFAMILY:'VERDANA',_WRAPTEXT:'TRUE',_TEXTALIGN:'LEFT',M_ROW:3,M_COL:1,I_NR:'HOW MANY TOTAL GUESTS ARE THE USER HAVING?'}. According to these parameters, cell A3 is the intersection of a third row and a first column and is referenced with a Column letter Row number notation A3. The text in cell A3 is aligned to the left, the color of the cell is navy, and the size of the cell is 9pt. The datafile 122 also includes real-time data, web data, and macros.

Fig. 2 shows an embodiment of a web-based spreadsheet 200. In this embodiment, web-based spreadsheet 200 includes a tool bar 202, various icons 204, and an icon 206 to allow the user email the spreadsheet 200. The spreadsheet 200 contains columns and rows in which all of the spreadsheet calculations are performed. Each row has a number and each column has a letter. A cell is the intersection of a row and a column and is referenced with a Column letter, Row number notation, such as A1 or C3. The example spreadsheet 200 has at least 27 rows (numbered 1 through 27) and 8 columns (labeled A through H). More rows can be viewed with the scroll bar. The designer can reset the number of rows and columns in the spreadsheet with the "Set Size" command discussed below. In addition, the designer can add or delete columns with the "Insert/Delete Rows or Columns" commands. A cell can contain labels, numbers, test (strings), dates/times or formulas. (Other embodiments may have additional types of data in their cells.) A string is a text entry, such as "Sales targets." A number is an integer or decimal value. Numbers can be formatted, for example, as currency, as integers (whole numbers), as decimal numbers, or as percentages. Users can define arbitrary formulas.

Formulas are often used to express mathematical relationships between cells. For example, if the formula =B2 + B3 is entered into cell B4, then the number displayed in cell B4 will always be the sum of those two cells. If the values in either B2 or B3 change,

B4 will be automatically updated to reflect the change. In the described embodiment, formulas are always preceded with an "=" sign. Other formula formats may be used. In addition, cells that contain formulas can, themselves, be used in formulas. If the formula =B4*1.08 is placed in cell C4, then both B4 and C4 will change accordingly when values in B2 and B3 are changed.

Formulas can be written with simple arithmetic operators, such as "+", "-", "*", and "/", and they can also use functions. Functions let the designer perform more sophisticated calculations. For example, the SUM() function lets the designer add the contents of all the cells within the parentheses. For example, =SUM(B3,B4) is the same as B3 + B4. =SUM(A6:K6) adds the values in all the cells between A6 and K6, inclusive. The notation A6:K6 is called a *range* and is shorthand for expressing all the cells between the two (e.g. A6, B6, C6, D6, E6, F6, G6, H6, I6, J6, K6). A more complete list of all the available functions is in the Function Reference section below.

A current cell area 208 contains the name of a currently selected cell in the spreadsheet (such as cell A1 220). Area 210 is preferably a drop down function menu, although any appropriate user interface can be used. The drop down function menu 210 allows the designer to select web data and real-time data to be placed in a cell of the spreadsheet as shown in Fig. 6. The designer can change information for any specific cell in the spreadsheet. To do so, the designer has to click on that cell to highlight it. The command line 222 is the area of the spreadsheet 200 where a designer enters and edits cell values and formulas. To change information for a specific cell, a designer clicks on that cell to highlight it. Then, the designer types the value, text or formula for that cell into the command line field 222. If the cell already has an entry, that entry will appear in the command line. If the designer makes a mistake while typing, he can discard his entry by clicking the "X" button at the end of the command line. To accept his entry, the designer clicks the check mark, or hits the Enter key.

The designer can set or reset the number of rows and columns in his spreadsheet with the Set Size command. The designer can add or delete columns with the Insert/Delete Rows or Columns commands. The format bar 204 contains clickable icons and drop down menus used to format numbers and text within cells.

These controls will be comfortable to most users of standard word processors and spreadsheets. They include font selection and size controls, font style (bold, italic, underline), alignment, text color, and cell background color (among others).

All spreadsheets can be accessed in two ways. In Spreadsheet Mode, the designer works with a full-featured, web-based spreadsheet. The designer can create formulas, add and delete columns and format cells. Certain designers may also allow other users to use the spreadsheet in full spreadsheet mode. A spreadsheet can also be used in Calculator Mode. When the user views a spreadsheet as a Calculator, he is working with the spreadsheet as a fill-in-the-blanks, self-standing application. The user is not allowed to view any formulas or spreadsheet controls. He merely enters data, and sees what the spreadsheet says.

Fig. 3 is a flow chart showing a method performed by server 104 of Fig. 1. When this method is performed, a user or other entity (such as a computer program) has requested a particular web-based spreadsheet from server 104. This request may, for example, take the form of an http request sent to the server:

<http://server.com/mycalc&dataID=1231231&mode=spreadsheet>

When the server receives 302 this request, it looks at the parameters of the request (here, dataID and mode) 304. The dataID parameter identifies 306 a file containing the data for the web-based spreadsheet. If the mode indicates a spreadsheet mode 308, the data needed to create a web-based spreadsheet on the client device is embedded in spreadsheet web page 112 and returned 310 to client 102. If the mode indicates a calculator mode 312, the user wishes to view the spreadsheet in a "fill in the blank" mode and does not wish to modify the format or layout of the spreadsheet. In this case, calculator data is added 318 to web page 112, which is returned to the client 102. If the mode is not spreadsheet and is not calculator, it may be "embedded mode." In this case, the spreadsheet is returned 314 in a form that can be embedded in a web page. Both calculators and embedded mode are discussed in the copending application "Client Side, Web-Based Calculator" of Guttman et al.

The spreadsheet page 112 contains script tags, spreadsheet data, and an HTML user interface. For example, in the case of a spreadsheet page 112, the script tag states `href="/css/spreadsheet_ie4_eda7fc0b.cssx"/`. Cells in spreadsheet page 112 have

different parameters than cells in a calculator page. Specifically, cells in a spreadsheet are unlocked and the editability flag has a "FALSE" value, whereas most cells in a calculator are locked and the editability flag has a "TRUE" value. If the designer requested data in the Embed mode, a loaded fully formed HTML element is returned, in element 316. This HTML element does not include HTML script tags, unlike the spreadsheet pages returned in steps 310 and 314. The embedded HTML page dynamically returns the HTML page. This is accomplished using "JavaScript include" tags. The "JavaScript include" tags return dynamically created JavaScript reflecting the current change in the spreadsheet or spreadsheet file. The process ends in 318 once the HTML page is returned.

Fig. 4 is a flow chart showing the steps performed by a browser 110 in accordance with the present invention. Once the browser 110 sends a request for an HTML page, as was discussed with reference to Fig. 3, the server 104 reviews the parameters received with the request and returns the HTML page accordingly. Once the browser parses the page in element 426, it might send additional requests to the server 104 for data, which were referred to in the HTML page. In element 428, loading progress bar reports are generated and displayed informing the user about the status of the progress of program execution. In particular, the progress bar may indicate the following: "Loading a Spreadsheet" or "Loading a Calculator." In element 430, the spreadsheet is built (as shown in Fig. 5). In element 432, the designer has the option of saving the file he is currently working with if the data was modified since the last time the file was saved. The process ends in element 434. Building the spreadsheet 430 is discussed below.

Fig. 5 is a flow chart illustrating the process of building a spreadsheet in accordance with a described embodiment of the present invention. Initially, a client system 102 receives the number of rows and columns to build a particular spreadsheet, in element 502. As shown in connection with Fig. 2, an example spreadsheet has columns and rows. A two-dimensional array of cell elements is built. In element 504, each cell is initialized and dynamic HTML is specified for each cell. This step includes obtaining information about a particular cell from a Data Array file 114. This information includes, but is not limited to, cell dependency, formatting, content, and editability. Thus, as shown in Fig. 17(b), cell A3 which includes the text "HOW MANY TOTAL GUESTS ARE YOU

HAVING?" is described by the following parameters, as shown in Table 1: {ENTRY:'HOW MANY TOTAL GUESTS ARE YOU HAVING?',LOCKED:'FALSE',VIEWSIZE:'9PT',FORECOLOR:'NAVY',VIEWFAMILY:'VERDANA',_WRAPTEXT:'TRUE',_TEXTALIGN:'LEFT',M_ROW:3,M_COL:1,I_NR:'HOW MANY TOTAL GUESTS ARE YOU HAVING?'}. According to these parameters, cell A3 is the intersection of a third row and a first column and is referenced with a Column letter, Row number notation A3. Cell A3 is an editable cell because the editability flag is set to "FALSE" (the spreadsheet was so-designed by its designer), the text in the cell is aligned to the left, the color of the cell is navy, and the size of the cell is 9pt.

Once dynamic HTML is specified for each cell, the browser executes Javascript in the page to build a dependency tree in step 505. The dependency tree is part of the Data Array 114. Any spreadsheet has at least two types of cells: the ones that depend on a particular cell and the ones on which a particular cell depends. Some cells in the Data Array 114 contain the field "i_rt" and others contain the field "i_tb". The fields are lists of other cells that a given cell depends on (i_rt) and a list of cells that depend on this cell (i_tb). "I_tb" stands for "initialize the referred to by cell" and "i_rt" stands for "initialize refers to cell. If, for example, cell B13 is a dependent cell, the following is the list in Data Array 114 of other cells upon which cell B13 depends:

I_RT:'[E[7][2],E[3][2],E[5][2]]',LOCKED:'FALSE',VIEWSIZE:'9PT',_WIDTHCLUE:'80',_TEXTALIGN:'RIGHT',M_ROW:13,M_COL:2,I_NR:'12.5'}. Accordingly, cell B13, which is the intersection of row 13 and column 2, depends on cells B7 ([7][2]), B3 ([3][2]) and B5 ([5][2]).

Once all cells are built, they become visible, in element 506. This is done with a combination of HTML that is generated on the fly using JavaScript and by JavaScript itself. In element 508, calculations are performed for each cell, when needed.

Once all calculations are made, the determination is made whether a particular cell is editable (whether it is locked) (not shown). If a cell is non-editable, that cell is locked and the user is not allowed to enter data into that cell in spreadsheet mode. For example, according to 114 description, cells A13-A23 are locked and the user cannot change their content. In the alternative, if the cell is editable (unlocked) (for example,

cells B3 and B5, as described in the Data Array 114), an input box is built around that cell. The user can type in the value in that cell because it is unlocked in spreadsheet mode. Thus, the user can type in “12” in cell B3 and “2” in cell B5.

5 2. USER INTERFACE

The following section discusses the user interface for an example web-based spreadsheet. The functionality described herein is implemented using Javascript. When necessary, reference is made to Fig. 2.

10 Fig. 6 shows the web-based spreadsheet of Fig. 2 with a drop down menu 602 of web data and real-time data. In the described embodiment, the image URL and the Web link are web data and the Stock Quote and Currency Quote are real-time data.

Image URL: Inserts the PictureURL function (which places a reference picture in the cell)

15 **Stock Quote:** Automatically inserts the Quote() function, which provides access to 20 min delayed stock quotes.

Web link: Inserts the Hypertext function (text which opens up a new browser window with a specified URL, when clicked)

Currency Quote: Automatically inserts the Currency() function, which provides access to 20 min delayed currency quotes.

20 These functions, described in Table 2, give the designer the ability to draw live, real-time information from the Web and incorporate it into his spreadsheets. For the standard set of functions, see Table 4.

Table 2

quote(<i>symbol</i>, <i>data</i>)	Returns the 20-min delayed stock price for a given security. Both <i>symbol</i> and <i>data</i> should be enclosed in quotes (e.g. "HBRN").
--	---

	<p>symbol = stock symbol</p> <p>data = optional data type requested. Choices are, "price", "date", "time", "change", "open", "high", "low", "volume", "name". If <i>data</i> is omitted, quote() returns the price.</p>
image(url)	<p>Displays a web-hosted image within a spreadsheet cell. <i>url</i> is the URL where the image is located, and should be enclosed within quotes.</p>
link(url, text)	<p>Creates a link to <i>url</i> from the words <i>text</i> displayed within a cell. If <i>text</i> is omitted, the url name is displayed.</p> <p>Note that any text preceded by "http://" will automatically be turned into a link by .</p>
currency(from, to, date, option)	<p>Converts from one currency to another.</p> <p>from = currency units to convert from. Should be enclosed in quotes. See the currency code table</p> <p>to = currency units to convert to. Should be enclosed in quotes. See the currency code table</p> <p>date = (optional) date for conversion information. If omitted uses today's information.</p>

	option = (optional) conversion code, "bid", "ask", "min_bid", "min_ask", "max_bid", "max_ask". If omitted, "bid" is assumed.
--	--

Fig. 7(a) shows an example of adding a web-based image to the web-based spreadsheet. The designer selects "Image URL" from the drop down menu 602, which places "=image("put image url here")" in the function area 222. The designer then enters a URL (e.g., "<http://abccorp.com/image1.gif>"). At this point, the functionality of the spreadsheet page 112 (e.g., JavaScript in the page) sends an http request to network 106, which routes the request to the web server referenced by the URL (e.g., "abccorp.com"). The web server returns an image (e.g., "image1.gif"), which is displayed inside the cell associated with the Image URL function.

Fig. 7(b) shows the result of adding a web-based image to the web-based spreadsheet. In the described embodiment, if the image is larger than the cell, only a part of the image 702 that will fit in the cell will be displayed.

Fig. 7(c) shows the result of right clicking on a cell containing the web-based image (or of right clicking on any cell). Right clicking causes a menu to be displayed, which includes the following functions: Cut, Copy, Paste, Paste Values, Clear, Insert Row, Insert Column, Delete Row, Delete Column, Row Height, and Column Width.

Fig. 7(d) shows an example in which the vertical size of the cell containing the web-based image is increased to 120 pixels. As can be seen in the example, increasing the size of the row causes more of the image "image1.gif" to be displayed

Fig. 8(a) shows an example of adding a real-time stock quote to the web-based spreadsheet. The designer selects "Stock Quote" from the drop down menu 602, which places "=quote("put stock symbol here")" in the function area 222. In the example, the user then enters a stock symbol (e.g., "SUNW"). At this point, the functionality of the spreadsheet page 112 (e.g., JavaScript in the page) sends an http get request to server 104 via network 106. The web server 104 returns a stock quote for the symbol entered

(e.g., "SUNW"). The returned stock quote is displayed inside the cell associated with the Quote function.

Fig. 8(b) shows an intermediate step while the real-time stock quote data is being loaded. After the user has entered a stock symbol, but before a stock quote has been received, the functionality of page 112 displays a legend "loading."

Fig. 8(c) shows the result of adding real-time stock quote data to the web-based spreadsheet. After a stock quote (e.g., "\$115.25") has been received, it is displayed in the cell 902 associated with the Quote function.

In the described embodiment, the server 104 obtains real-time data such as stock quotes or currency conversion information in any appropriate manner. For example, server 104 may contract with a third party, which supplies stock and/or currency information periodically. As another example, server 104 may obtain data from a third party's web page (screen scraping) periodically. The described embodiment currently obtains its stock quotes from a Yahoo service that returns textual stock information when an http get request is sent to the Yahoo server, although any appropriate source could be used.

If, for example, stock information is provided or obtained every fifteen minutes, the information supplied to the designer's web-based spreadsheet is no more than fifteen minutes old when it is received. The data is called real-time data because its value depends on the time it was requested and sent. In addition, certain embodiments allow the user to periodically request new real-time information and update the cell relying on that real-time information as discussed below in connection with macros. If, for example, new data is requested every fifteen minutes, the data in the spreadsheet is never older than fifteen minutes old.

It will be understood by persons of skill in the art that, whenever real-time data is updated, all cells that depend from the updated cell also are recalculated and redisplayed if needed. Thus, if a cell depends on a cell containing real-time data, that cell would also be updated every time the real-time data cell is changed. The described embodiment keeps track of which cells depend from other cells and, when new data is received for a cell, all cells depending from that cell are also checked to see if they need updating.

Fig. 9(a) shows an example of adding a hypertext link to the web-based spreadsheet. The designer selects "Web Link" from the drop down menu 602, which places "=link("put URL here", "put optional shortcut name here")" in the function area 222. In the example, the designer then enters a URL (e.g., "http://abccorp.com") and a shortcut (e.g., "Link to ABC Corp"). At this point, the functionality of the spreadsheet page 112 (e.g., JavaScript in the page) inserts a link in the cell associated with the Web Link function. The link contains the shortcut specified by the designer. When the shortcut is clicked, the functionality of the spreadsheet page 112 (e.g., Javascript in the page) sends an http request to network 106, which passes the request to the appropriate server. Web server 104 returns the data (such as a web page) associated with the address/URL. The returned data is displayed inside a browser window (not shown).

Fig. 9(b) shows the result of adding the hypertext link to the web-based spreadsheet. It will be understood that other parameters can be used for web data and real-time data. It will also be understood that other web functions and real-time functions can be used in conjunction with the present invention. For example, real-time data might include interest rate information, financial data, or engineering data.

Fig. 10(a) shows an example of adding a real-time currency value to the web-based spreadsheet. The designer selects "Currency Quote" from the drop down menu 602, which places "=currency("put from currency here", "put to currency here", "09/11/2000", "bid")" in the function area 222. Currency conversion is performed from the FROM currency to the TO currency using the conversion rate of the date specified (default is today's date). "Bid" is an example of the conversion option, which is described in more detail in Fig. 5. In the example, the designer then enters a TO currency symbol (e.g., "usd" for U.S. dollars) and a FROM currency ("gbp" for Great Britain pound). The designer enters that day's date and "bid." At this point, the functionality of the spreadsheet page 112 (e.g., JavaScript in the page) sends an http request to server 104 via network 106. The web server 104 returns a currency conversion quote for the values entered. The returned currency conversion quote (e.g., "\$1.41") is displayed inside the cell associated with the Quote function.

Fig. 10(b) shows the result of adding real-time currency conversion quote data to the web-based spreadsheet. After a currency conversion quote (e.g., "\$1.41") has been received, it is displayed in the cell 1002 associated with the Quote function.

Table 3 lists currency codes for use with the **currency(from, to, date, option)** function.

Table 3

Currency	Code
US Dollar	USD
Afghanistan Afghani	AFA
Albanian Lek	ALL
Algerian Dinar	DZD
Andorran Franc	ADF
Andorran Peseta	ADP
Angolan New Kwanza	AON
Argentine Peso	ARS
Aruban Florin	AWG
Australian Dollar	AUD
Austrian Schilling	ATS
Bahamian Dollar	BSD
Bahraini Dinar	BHD
Bangladeshi Taka	BDT
Barbados Dollar	BBD
Belgian Franc	BEF
Belize Dollar	BZD
Bermudian Dollar	BMD

Bhutan Ngultrum	BTN
Bolivian Boliviano	BOB
Botswana Pula	BWP
Brazilian Real	BRL
British Pound	GBP
Brunei Dollar	BND
Bulgarian Lev	BGL
Burundi Franc	BIF
CFA Franc BCEAO	XOF
CFA Franc BEAC	XAF
Cambodian Riel	KHR
Canadian Dollar	CAD
Cape Verde Escudo	CVE
Cayman Islands Dollar	KYD
Chilean Peso	CLP
Chinese Yuan Renminbi	CNY
Colombian Peso	COP
Comoros Franc	KMF
Costa Rican Colon	CRC
Croatian Kuna	HRK
Cuban Peso	CUP
Cyprus Pound	CYP
Czech Koruna	CSK
Danish Krone	DKK

Djibouti Franc	DJF
Dominican R. Peso	DOP
Dutch Guilder	NLG
ECU	XEU
Ecuador Sucre	ECS
Egyptian Pound	EGP
El Salvador Colon	SVC
Estonian Kroon	EEK
Ethiopian Birr	ETB
Euro	EUR
Falkland Islands Pound	FKP
Fiji Dollar	FJD
Finnish Markka	FIM
French Franc	FRF
Gambian Dalasi	GMD
German Mark	DEM
Ghanaian Cedi	GHC
Gibraltar Pound	GIP
Gold (oz.)	XAU
Greek Drachma	GRD
Guatemalan Quetzal	GTQ
Guinea Franc	GNF
Guyanese Dollar	GYD
Haitian Gourde	HTG

Honduran Lempira	HNL
Hong Kong Dollar	HKD
Hungarian Forint	HUF
Iceland Krona	ISK
Indian Rupee	INR
Indonesian Rupiah	IDR
Iranian Rial	IRR
Iraqi Dinar	IQD
Irish Punt	IEP
Israeli New Shekel	ILS
Italian Lira	ITL
Jamaican Dollar	JMD
Japanese Yen	JPY
Jordanian Dinar	JOD
Kazakhstan Tenge	KZT
Kenyan Shilling	KES
Kuwaiti Dinar	KWD
Lao Kip	LAK
Latvian Lats	LVL
Lebanese Pound	LBP
Lesotho Loti	LSL
Liberian Dollar	LRD
Libyan Dinar	LYD
Lithuanian Litas	LTL

Luxembourg Franc	LUF
Macau Pataca	MOP
Malagasy Franc	MGF
Malawi Kwacha	MWK
Malaysian Ringgit	MYR
Maldives Rufiyaa	MVR
Maltese Lira	MTL
Mauritanian Ouguiya	MRO
Mauritius Rupee	MUR
Mexican Peso	MXP
Mongolian Tugrik	MNT
Moroccan Dirham	MAD
Mozambique Metical	MZM
Myanmar Kyat	MMK
NL Antillian Guilder	ANG
Namibia Dollar	NAD
Nepalese Rupee	NPR
New Zealand Dollar	NZD
Nicaraguan Cordoba Oro	NIO
Nigerian Naira	NGN
North Korean Won	KPW
Norwegian Kroner	NOK
Omani Rial	OMR
Pakistan Rupee	PKR

Palladium (oz.)	XPD
Panamanian Balboa	PAB
Papua New Guinea Kina	PGK
Paraguay Guarani	PYG
Peruvian Nuevo Sol	PEN
Philippine Peso	PHP
Platinum (oz.)	XPT
Polish Zloty	PLZ
Portuguese Escudo	PTE
Qatari Rial	QAR
Romanian Leu	ROL
Russian Rouble	RUB
Samoan Tala	WST
Sao Tome/Principe Dobra	STD
Saudi Riyal	SAR
Seychelles Rupee	SCR
Sierra Leone Leone	SLL
Silver (oz.)	XAG
Singapore Dollar	SGD
Slovak Koruna	SKK
Slovenian Tolar	SIT
Solomon Islands Dollar	SBD
Somali Shilling	SOS
South African Rand	ZAR

Venezuelan Bolivar	VEB
Vietnamese Dong	VND
Yugoslav Dinar	YUN
Zambian Kwacha	ZMK
Zimbabwe Dollar	ZWD

Fig. 11 shows an example of a cell A3 that contains the sum of two other cells (A1 and A2).

5 MOVING AND SELECTING CELLS

To navigate within a worksheet, the designer clicks the cursor on the cell that the designer is interested in editing. The chosen cell will be highlighted with a different color background. The designer can also select multiple cells by clicking and dragging the cursor across several cells. This is useful when the designer wants to apply a format to several cells at once. When the designer has selected multiple cells, the "target" cell is highlighted with a darker color than other cells in the selection. Note that while the designer can simultaneously format all the cells in a selection, the designer can only edit the value (or formula) of the target cell.

The designer can select an entire row or column by clicking on the row or column header within the worksheet (e.g. "A" or "5"). The designer can also select the entire worksheet by clicking on the single cell at the intersection of the row and column headers (to the left of "A" and above "1"). This is useful for applying global formatting, such as changing the font, to the entire sheet.

The arrow keys can also be used to navigate through the spreadsheet. The Tab key moves the selection one cell to the right; Shift-Tab moves it one cell to the left. Enter moves the active cell down.

ENTERING DATA

To enter data into a spreadsheet, the designer highlights the cell of interest and begins typing. The typed data will replace any information currently contained within the cell. The designer can edit a cell's data by highlighting the cell of interest and moving the cursor to the command line. The designer locates the cursor wherever the designer wants to insert or replace data and begins typing.

TYPES OF CELL DATA

Several kinds of data that can be displayed in a spreadsheet cell:

Labels: Labels are simply strings of text that appear within a cell. They are typically used to name rows or columns of numbers, and for descriptive text introducing or explaining a spreadsheet. Text can also be used within formulas, but they must be enclosed in quotes (i.e. "text"). The "&" operator lets the designer create a long text string by "adding" together a number of smaller components.

Numbers: The designer can input numbers with or without a decimal point, and these numbers can be expressed as currency, as integers, as decimal numbers or as percentages (note, when using percentages $0.01 = 1\%$, $0.30 = 30\%$, etc).

Dates and Times: also supports the input and display of date and time data. Use a "/" to separate the parts of a date; for example, type 10/6/1996. When entering a time, use the colon, ":" to separate hours and minutes. To enter a time based on the 12-hour clock, type a space, then an "A" or "P" to indicate AM or PM.

Formulas: Formulas are mathematical expressions that let the user perform a calculation within a spreadsheet cell. *Formulas are always preceded with the "=" symbol.* These formulas can be simple numerical expressions like, " $=34*67/12$." However, the real power of spreadsheet lies in using *cell references* as parts of formulas. Each cell has an address that is expressed as

the intersection of its column and row. For example, the cell in column 5, row 3, is E3. Instead of using absolute numbers in formulas, the designer can use a cell reference to employ the number within a given cell as part of a formula. The formula, " $=B3*C4$ " multiplies the values within cells B3 and C4, and displays the result in the cell containing the formula.

ABSOLUTE AND RELATIVE REFERENCES

One of the most useful things about using cell references within formulas is that the designer can easily duplicate those formulas in other cells using the copy and paste commands. For example, if the designer is creating a spreadsheet that describes his monthly expenses, and the designer has summed all expenses for January into cell B8, the designer can copy and paste that formula into cell C8 for February, D8 for March, etc. To accomplish this without making a mistake, however, the designer needs to understand absolute and relative cell references.

Relative references are written in the notation introduced above, column letter, row number. When the designer copies and pastes a relative reference, it is automatically adjusted, based on the number of cells between where it is copied from, and where it is being copied to. In the example above, say the formula in cell B8 is, " $=\text{sum}(B5:B7)$," which simply adds all the numbers in cells B5 through B7. If the designer copies this formula from B8 and pastes it into C8, it will automatically be adjusted from " $=\text{sum}(B5:B7)$ " to read, " $=\text{sum}(C5:C7)$." If it was pasted into D8, the formula in that cell would read, " $=\text{sum}(D5:D7)$," and so on.

Note that either the number or letter in a cell reference, or both can be relative or absolute. In other words, the designer can write, A2, \$A2, A\$2, or \$A\$2. The described embodiment checks to see which letters or numbers the \$-sign applies to, when the designer is doing a copy/paste, and adjusts formulas accordingly.

Functions

The described embodiment contains a wide variety of built-in functions that can perform sophisticated analysis. Currently, the functions are broken down into the following categories:

Math: Such as SUM(), which adds the contents of listed cells.

5 **Financial:** Such as PMT(), which calculates the payment on a loan.

Logical: Such as IF(), which lets the designer display one of two outcomes, based on whether an expression is true or false.

Lookup functions: Such as HLOOKUP(), which lets the designer look up a value in a row full of data.

10 **Date and Time:** Such as DAY(), which extracts the day of the month from a date string.

Text: Like CONCATENATE(), which creates a text string by putting several other strings together.

15 **Web:** Like QUOTE(), which provides a 20 min delayed quote for a given stock.

Functions are used in formulas, just like numbers or cell values (e.g. =A3 + B7 + SUM(C12,C14,H17)). For a complete listing of functions, see Table 4.

Because the program is dynamically delivered, the user always gets the newest version with the latest functionality.

20 Table 4

Math Functions	
abs(<i>number</i>)	Returns the absolute value of the number
acos(<i>number</i>)	ArcCosine of a value (angle returned in radians). If the designer wants the angle in degrees, combine acos() with the

	degrees() function. For example, $\text{degrees}(\text{acos}(0.5)) = 60$.
asin(number)	ArcSine of a value (angle returned in radians). If the designer wants the angle in degrees, combine asin() with the degrees() function. For example, $\text{degrees}(\text{asin}(0.5)) = 30$.
atan(number)	ArcTangent of a value (angle returned in radians). If the designer wants the angle in degrees, combine atan() with the degrees() function. For example, $\text{degrees}(\text{atan}(1.0)) = 45$.
atan2(x-coord, y-coord)	ArcTangent of the angle between the x-axis and a line between the origin (0,0) and a point with the coordinates (x-coord, y-coord). The angle is returned in radians. If the user wants the angle in degrees, combine atan2() with the degrees() function. For example, $\text{degrees}(\text{atan2}(3,3)) = 45$.
average(number1, number2...)	Calculate the average of all numbers.
ceiling(number, round)	Rounds a number up to the nearest multiple of round. For example, $\text{ceiling}(2.25, 0.5) = 2.50$
cos(angle)	Cosine of an angle (in radians). If his angle is in degrees, combine cos() with the radians() function. For example, $\text{cos}(\text{radians}(30))$.
degrees(radians)	Converts an angle in radians to degrees.
e()	Returns the constant, e.
exp(exponent)	Raises the constant e to the specified

	exponent
floor (<i>number</i> , <i>round</i>)	Rounds value down to the nearest multiple of <i>round</i> . For example, floor(2.25, 0.5) = 2.00.
int (<i>number</i>)	Returns the integer (or non-fractional) part of <i>number</i> . Note, int() does not round up or down. For example, int(3.765) = 3.
ln (<i>number</i>)	Takes the natural logarithm (base e) of <i>number</i> .
log10 (<i>number</i>)	Takes the logarithm (base 10) of <i>number</i> .
max (<i>number1</i> , <i>number2</i> ...)	Returns the maximum value of all numbers.
median (<i>number1</i> , <i>number2</i> ...)	Returns the median (or middle) value of a set of numbers.
min (<i>number1</i> , <i>number2</i> ...)	Returns the minimum value of all numbers.
mod (<i>number</i> , <i>divisor</i>)	Returns the remainder of <i>number</i> / <i>divisor</i> . For example, mod(14,4) = 2.
pi ()	Returns the constant, pi.
power (<i>number</i> , <i>exponent</i>)	Raises <i>number</i> to the specified exponent. For example, power(3,2) = 9.
product (<i>number1</i> , <i>number2</i> ...)	Multiplies all the number arguments together and returns the product. For example, product(3,2,5) = 30.
radians (<i>degrees</i>)	Converts an angle in degrees to radians.
rand (<i>number1</i> , <i>number2</i>)	Returns a random number. Both arguments are optional. If <i>number1</i> is included, rand(<i>number1</i>) returns a random number between 0 and <i>number1</i> .

	If <i>number2</i> is included, then it returns a number between <i>number1</i> and <i>number2</i>
round(number, places)	Rounds value up or down to the specified number of decimal place. For example, round(3.14159, 2) = 3.14.
sin(angle)	Sine of an angle (in radians). If his angle is in degrees, combine sin() with the radians() function. For example, sin(radians(30)).
sqrt(number)	Takes the square root of a number
sum(range)	Adds the values of all the listed cells and ranges. Multiple cells addresses or ranges can be used.
tan(angle)	Tangent of an angle (in radians). If the designer angle is in degrees, combine tan() with the radians() function. For example, tan(radians(30)).
trunc(number)	Truncates a number to an integer. For example, trunc(12.893) = 12.
Financial Functions	
fv(r, nper, pay)	<p>The future value of a series of payments, at a specific interest rate, where:</p> <p>r = the interest rate</p> <p>nper = the number of periods of compounding</p>

<p>nper(<i>r</i>, <i>pay</i>, <i>pv</i>)</p>	<p>Generates the number of periods needed to pay off loan, <i>pv</i>, based on constant periodic payments and a constant interest rate.</p> <p><i>r</i> = the interest rate</p> <p><i>pay</i> = period payment amount (note: this is normally a negative number).</p> <p><i>pv</i> = the value of the series of payments, today.</p> <p>Note: Make sure the designer is using a consistent value for <i>r</i>. If payments are made monthly, the interest rate must be monthly (annual rate/12).</p>
<p>npv(<i>r</i>, <i>pay1</i>, <i>pay2</i>...)</p>	<p>Returns the net present value of a series of payments, where:</p> <p><i>r</i> = the interest rate <i>per period</i>.</p> <p><i>pay1</i>... <i>payn</i> = payment amounts (note: payments must be equally spaced in time)</p> <p>Note: Make sure the designer is using a</p>

	consistent value for r. If payments are made monthly, the interest rate must be monthly (annual rate/12).
pmt(r, nper, pv)	<p>Returns the payment amount for a loan of amount pv, where:</p> <p>r = the interest rate</p> <p>nper = the total number of compounding periods</p> <p>pv = the loan amount</p>
ppmt(r, per, nper, pv)	<p>Returns the principle portion of a payment for a specified period, where:</p> <p>r = the interest rate</p> <p>per = the number of the period of interest</p> <p>nper = the total number of compounding periods.</p> <p>pv = the value of the series of payments, today.</p> <p>Note: Make sure the designer is using</p>

	consistent values for r and np. If payments are made monthly, the interest rate must be monthly (annual rate/12), as well. For monthly payments, nper= number of years x 12.
<i>pv(r, nper, pay)</i>	<p>Returns the present value of a series of payments, where:</p> <p>r = the interest rate</p> <p>nper = the total number of compounding periods.</p> <p>pay = the amount paid each period (note: this is normally a negative number)</p> <p>Note: Make sure the designer is using consistent values for r and nper. If payments are made monthly, the interest rate must be monthly (annual rate/12), as well. For monthly payments, nper = number of years x 12.</p>
Logical and Information Functions	
<i>iserror(cell)</i>	Returns true (the value 1) if the cell contains an error value. Otherwise, it returns 0 (false).

isblank(cell)	Returns true (the value 1) if the cell is blank. Otherwise, it returns 0 (false).
isstring(cell)	Returns true (the value 1) if the cell contains a string value. Otherwise, it returns 0 (false).
isvalue(cell)	Returns true (the value 1) if the cell contains a numeric value. Otherwise, it returns 0 (false).
and(arg1, arg2...)	Returns true (the value 1) if all arguments are true.
or(arg1, arg2...)	Returns true (the value 1) if any or all of the arguments are true
xor(arg1, arg2...)	Returns true (the value 1) if only one of the arguments is true.
not(logical)	Returns false (the value 0) if true; true (the value 1) if false
if(test, trueval, falseval)	Returns <i>trueval</i> if <i>test</i> returns true, <i>falseval</i> if test returns false
false()	Returns false (the value 0).
true()	Returns true (the value 1).
Lookup Functions	
select(index, val1, val2...)	Selects value number <i>index</i> , from a set of values, or from a range. For example, select(3, apple, baker, charlie, david) = charlie
hlookup(val, range, row)	Does a lookup for a value within a horizontal range of cells, and returns a cell value from the column in which the

	<p>looked-up value was found.</p> <p>val = number or text value to be looked-up.</p> <p>range = range of cells containing both the row of values to do look-up in, as well as the row of values containing return values.</p> <p>row = number of the row within "range" containing return values.</p>
vlookup(val, range, col)	<p>Does a lookup for a value within a vertical range of cells, and returns a cell value from the row in which the looked-up value was found.</p> <p>val = number or text value to be looked-up.</p> <p>range = range of cells containing both the row of values to do look-up in, as well as the column of values containing return values.</p> <p>col = number of the column within "range" containing return values.</p>
Date and Time Functions	

date(<i>year, month, day</i>)	<p>Returns the serial number (the internal date and time representation) for a specified date, where:</p> <p>year = a four-digit number from 1900 to 9999.</p> <p>month = a number from 1 (January) to 12 (December).</p> <p>day = a number from 1 to 31.</p>
datevalue(<i>datestring</i>)	Returns the serial number (the internal date and time representation) for a date string in the day/month/year format.
day(<i>serialnumber</i>)	Returns the day of the month corresponding to the supplied serial number.
hour(<i>serialnumber</i>)	Returns the hour corresponding to the supplied serial number. Hours are returned in military format ranging from 0 to 23, where 0 = 12AM and 23 = 11PM.
minute(<i>serialnumber</i>)	Returns the minute corresponding to the supplied serial number. Minutes range from 0 to 59.
month(<i>serialnumber</i>)	Returns the month of the year corresponding to the supplied serial number. Months range from 1 (January) to 12 (December).

now()	<p>Returns the serial number (the internal date and time representation) for the date and time, combined.</p> <p>Use today() if the designer only wants the date value returned.</p>
second(<i>serialnumber</i>)	Returns the second corresponding to the supplied serial number. Seconds range from 0 to 59.
time(<i>hour, minute, second</i>)	<p>Returns the serial number (the internal date and time representation) for a specified date, where:</p> <p>hour = a two-digit number ranging from 0 (12AM) to 23 (11PM).</p> <p>minute = the minute of the hour ranging from 0 to 59.</p> <p>second = a number ranging from 0 to 59.</p>
timevalue(<i>timestring</i>)	<p>Returns the serial number (the internal date and time representation) for a specified time, where timestring is in the format, hour:minute:second.</p> <p>hour = a two-digit number ranging from 0 (12AM) to 23 (11PM).</p> <p>minute = the minute of the hour ranging</p>

	<p>from 0 to 59.</p> <p>second = a number ranging from 0 to 59.</p>
today()	<p>Returns the serial number (the internal date and time representation) for the date.</p> <p>Use now() if the designer wants both the date and time returned.</p>
weekday(<i>serialnumber/datestring</i>)	<p>Returns the day of the week ranging from 1 (Sunday) to 7 (Saturday). The argument can be supplied either as an internal date-time serial number or as a date string in the format month/day/year.</p>
year(<i>serialnumber/datestring</i>)	<p>Returns the 4-digit year. The argument can be supplied either as an internal date-time serial number or as a date string in the format month/day/year.</p>
Text Functions	
concatenate(<i>string1, string2...</i>)	<p>Joins all the strings supplied as arguments. The designer can also use the "&" operator to do concatenation.</p>
User Interface Functions	
menu(<i>key1, value1, key2, value2...</i>)	<p>Builds a popup menu within a cell.</p> <p>key = text to be displayed in the popup menu.</p>

	value = value that is seen by other cells, and used in calculations when "key" is chosen.
Spreadsheet Linking Functions	
scell (row, col, "filename@membername") or scell ("filename@membername!cell")	Returns the last saved value of a cell contained within another spreadsheet. If the member is logged in, any spreadsheet within their "My Files" directory may be referenced. Otherwise, any public file may be referenced. row, col = row and column number of referenced cell. cell = cell reference in "a1" format. Note: entire fn@mn!cell string must be enclosed in quotes. filename = file name from "My Files" membername = member name. Note that "filename@membername" can be replaced by the fileID retrieved using sfind().
svlookup (val, filename@membername!range", col)	val = number or text value to be looked-up. filename = file name from "My Files" membername = member name. For

	<p>gallery files use the "gallery member name.</p> <p>range = range of cells containing both the column of values to do look-up in, as well as the column of values containing return values. Note: entire <code>fn@mn!range</code> string must be enclosed in quotes.</p> <p>col = number of the column within "range" containing return values.</p> <p>Note that "filename@membername" can be replaced by the fileID retrieved using <code>sfind()</code>.</p>
<p>shlookup(val, <i>filename@membername!range", row)</i></p>	<p>val = number or text value to be looked-up.</p> <p>filename = file name from "My Files"</p> <p>membername = member name. For gallery files use the "gallery member name."</p> <p>range = range of cells containing both the row of values to do look-up in, as well as the row of values containing return values. Note: entire <code>fn@mn!range</code> string must be enclosed in quotes.</p> <p>row = number of the row within "range" containing return values.</p>

	Note that "filename@membername" can be replaced by the fileID retrieved using sfind()
slist(membername)	<p>slist() returns a vector of filenames and fileIDs for use with the menu() function.</p> <p>For example, =menu(slist("smarty")) would return a list of the public files for member "smarty". If the member is logged in, slist() will return a list of all "My Files" spreadsheets. Otherwise, it will build a list of public files for a referenced member.</p>
sfind("filename", "membername") or sfind("filename@membername")	<p>sfind() returns the fileID of a file given its name (from "My Files") and membername.</p> <p>Use sfind() when the designer has to make multiple references to cells in another spreadsheet. Put "=sfind("fn@mn")" in a spreadsheet cell, and reference that cell in scell() and svlookup()function in other cells. Using the fileID instead of the filename@membername combination in scell() and svlookup() functions can make linked cell references much faster.</p>

Cell Ranges

Cell ranges are shorthand notation for describing a group of contiguous cells. The cell range expression, "D3:D7," is equivalent to "D3, D4, D5, D6, D7." Thus, the expression, SUM(D3:D7), is the same as D3 + D4 + D5 + D6 + D7. Many of the functions that take multiple arguments can use range values as well as single cell references.

ERROR MESSAGES

When the described embodiment detects an error—either in a formula the designer has input, or within the spreadsheet itself, it will normally report an "[error]" (or similar) message in the appropriate cell. A couple of the common mistakes that generate error messages are unbalanced parentheses, and referring to a cell that has an invalid value. For example, the formula, "=IF(A3 > 0, 0 , SUM(A2:C2)," will generate an error because it is missing a closing parenthesis. Similarly, the expression, "=A2 + B2," will display an error if either A2 or B2 contains an invalid value (such as a text label), instead of a number.

3. EDITING THE SPREADSHEET

SETTING THE SPREADSHEET SIZE

Figs. 12(a)-12(e) show examples of drop down menus used in a described embodiment of a web-based spreadsheet in accordance with the present invention. Fig. 12(a) is the drop down file menu.

New: Opens a new browser window with a blank spreadsheet.

Open: Brings up a list of the members files and lets them select and open a file.

Close: Closes the current spreadsheet window. If the current document hasn't been saved, the member is prompted to save it.

Save: Saves the current document.

Save As: Saves the current document with a new, designer-prompted name.

5 **Export to Excel:** Exports the currently active spreadsheet into Excel format and asks the designer to save on to their computer.

Import Excel file: Prompts designer to select an Excel file to import as a new spreadsheet.

10 **Set Size:** Brings up a dialog letting the designer change the number of rows and columns in the spreadsheet. If the data will be cropped (resulting in data loss) a warning is displayed.

Print: Opens a static view of the spreadsheet in a new window as a preview of how the spreadsheet will be printed, and then prints the active spreadsheet.

15 The following paragraphs describe some of the commands on this menu. When the designer creates a new spreadsheet, it is automatically created in the default dimensions. After initializing a spreadsheet, there are several ways that the designer can change the size of the spreadsheet. The *Set Size* command, found in the FILE menu lets the designer immediately adjust the number of rows and columns in his spreadsheet. Increasing the number of rows or columns will add cells onto the edge of the spreadsheet.
20 Decreasing the number of rows or columns will crop cells from the edge of the sheet. The designer should be careful when removing rows or columns not to delete any needed data.

Fig. 12(c) describes the drop down Tools menu. The TOOLS menu has a variety of operations that affect the display, contents and ordering of spreadsheet cells.

25 The tools menu includes:

Insert Row/Column: Adds rows or columns, shifting highlighted rows or columns, down or to the right.

Delete Row/Column: Deletes rows or columns containing the currently highlighted cell or range of cells.

Autofit Row/Column: Automatically resizes rows or columns to accommodate the size of the content in highlighted cells.

Sort Ascending/Descending: Sorts a cell range by row, based on the leftmost column of cells.

5 **Hide Grid:** Suppresses the display of the light blue grid around spreadsheet cells.

Calculator Preview: Lets the designer simulate the look of a spreadsheet in Calculator mode, and adjust which cells can be edited when viewed as a calculator.

10 **Summary & Instructions:** Brings up a dialog box that lets designers type in a file description and instructions on how to use the spreadsheet. These instructions are accessible when the document is opened in Calculator Mode.

15 The following paragraphs describe some of the commands on this menu. The *Insert Column*, *Insert Row*, *Delete Column* and *Delete Row* commands, found under the TOOLS menu, perform the corresponding operations. To delete a column or row, the designer clicks on the row number or column letter (e.g. "3" or "D"), to highlight that row or column. Or, the designer selects cells within the row(s) and column(s) that he wants to delete and then selects the *Delete Column* or *Delete Row* command from the menu. Alternatively, the designer can simply select a cell or cells within the row or column the designer wants to delete before issuing the command. The designer can also right click on the selected cells to choose Insert/Delete Row or Column from the Tools menu that appears for the selected cells. The designer can delete multiple columns or rows in the same operation by highlighting all the rows or columns the designer wants to delete, at once. If the designer wants to delete multiple rows or columns simultaneously, they must be contiguous. To insert columns or rows, the designer selects the column or row immediately *after* the location where the designer wants the new column or row to be added. The new column or row will be added *before* the highlighted cells. The designer can insert multiple columns or rows by highlighting multiple columns or rows before the designer executes *Insert Column/Row*. New rows or columns will increase the total size of the spreadsheet.

20

25

30

RESIZING ROWS AND COLUMNS

The designer can modify the width of a row or column by clicking in the row or column header next to the dividing line between the columns or rows the designer wants to change, and then dragging to the right, left, up or down. The resizing mechanism is sensitive to exactly where the designer clicks. If the designer has clicked in an appropriate location, a gray outline will appear around the column or row that the designer is about to resize.

The designer can resize multiple columns or rows simultaneously by highlights all the rows or columns the designer wants to resize, clicking on the edge of one of these rows or columns, and then dragging the border accordingly. All the rows or columns will be sized to the width of the one the designer set.

CLEARING AND DELETING DATA

Fig. 12(b) is the drop down Edit menu. The Edit menu includes the commands:

Cut, Copy, Paste: When used in combination, these commands let the designer duplicate a cell or cell range elsewhere on the spreadsheet, or to move that cell or range to a new location within the sheet.

Clear: Erases cell contents

Fill Down/Right: Takes the highlighted range and fills blank cells with either a number or series of numbers determined by the topmost or leftmost cells in the range.

To clear the contents of a cell, or range of cells, the designer clicks the cursor on a cell and drags to highlight all the cells of interest. He chooses the *Clear* command from the EDIT menu, or hits the *backspace* or *delete* keys to erase the contents of these cells. This technique only clears the contents of the cells (text labels, numbers, dates and formulas). The designer must use the formatting commands to re-adjust the borders, text styles or colors.

USING CUT, COPY AND PASTE

Cut, *Copy* and *Paste* are found on the EDIT menu, and work the same way in as they do in most software applications. To cut or copy a group of cells, first select the "source" cells by clicking on the first cell of interest and dragging to highlight the cell range. Choose *Cut* or *Copy* from the EDIT menu, or click on the corresponding icon, on the Format Bar. The cell range will be enclosed with a black border.

The designer selects the destination cell or cell range in the same manner, and then chooses *Paste*, or clicks on the Paste icon. If the designer initially chooses *Copy*, a duplicate of the source cells will appear in the destination location. As in most software applications, the keyboard shortcuts for Cut, Copy and Paste (Ctrl-X, Ctrl-C, Ctrl-V) and the right-click menu options for these actions are available for selected source cells. The formulas in these cells will be adjusted based on whether their cell references were relative or absolute. If the designer initially chooses *Cut*, the selected cells will be moved to the new location. The references in formulas within this range will continue to point to the original cells.

FILLING AND SORTING

The *Fill Down* and *Fill Right* commands on the EDIT menu let the designer fill a selection of cells with a set of numbers or a series of numbers. To use the *Fill Down* command, the designer selects a range of cells, making sure that the topmost cell in the range contains the value the designer wants to use for the fill. Choose *Fill Down* to populate the range with that value. The *Fill Right* command works the same as *Fill Down* except it propagates its values along rows instead of columns.

The *Sort Ascending* and *Sort Descending* commands on the TOOLS menu let the designer reorder a rectangular selection by the values in the first column of the range. The Sort commands will only reorder the selection *row-wise*.

FORMATTING NUMBERS, DATES AND TIME WITH THE FORMAT MENU

Fig. 12(d) is the drop down Format menu. The FORMAT menu contains formatting commands for numbers and dates. These commands include:

5 **General:** Removes any pre-determined format for highlighted cells. Most commonly used for cells containing text.

Custom: Brings up the Custom Format dialog, which gives access to a flexible system for setting the display of numbers and dates within cells.

8,901, 6%, etc: Pre-built formats, which can instantly applied to a range of selected cells.

10 **Wrap Text:** Lets the designer wrap text within the right and left cell borders. The default behavior is to let text overrun the cell borders.

15 The described embodiment contains a flexible and powerful engine for formatting numbers, dates and times. Numbers can be expressed as currency (preceded by \$), decimal values, integers, percentages, or dates. To format a number or range of numbers, the designer selects the cell or range of cells the designer wishes to format. He then clicks on the FORMAT menu and drags down to highlight the appropriate format style (Figure 6a). The selected format will be applied to those cells.

USING THE CUSTOM FORMAT DIALOG

20 The FORMAT menu contains a variety of commonly used number, time and date formats. There will be occasions, however, when the designer will need a format that is unavailable on the FORMAT menu. The *Custom...* format control dialog, accessed from the FORMAT menu, lets the designer specify exactly how the designer would like a number, time or date to appear. The dialog lets the
25 designer specify four sections of formatting: for positive numbers, for negative numbers, for zero and for errors.

Numbers: The dialog uses a set of special codes that tell how to show numbers. The symbol "#" is used as a placeholder for "optional" digits within a format (see

examples below). The symbol "0" is used to indicate mandatory digits within a number format. When a "0" is specified within a format string, it means that the number will be padded with 0's if there are no digits in the appropriate place in the number, natively. For example, the number ".3" formatted with the code, "0.00," will display as, "0.30." Table 5 has examples of number formats.

Table 5

To display	Use the code
1526.37 as 1,526.4	#,###.#
15.2 as 15.200	##,000 (or #,###.000)
.327 as 0.33	0.00
56.3 as \$56.30	\$##.00
-56.3 as (\$56.30)	(\$##.00) in the negative number field

Note, that if the designer use symbols other than "#" or "0", those symbols are inserted as-is into the format. This is a useful way to include symbols for non-US currency. A quantity of 35 British pounds (£35), for example, could be expressed with the code, "£##".

Date: recognizes date strings by the combination of the letters, "m", "d", "y", with the delimiter, "/". The designer can use the "mm" or "dd" to insure that day or month numbers are always two digits (e.g. "2" is always "02"). Years are always expressed as either 2-digits or 4 (e.g. 95 or 1995). Table 6 has date formats.

Table 6

To display	Use the code
April 5, 1989 as 4/5/89	m/d/yy

April 5, 1989 as 5/4/1989	d/m/yyyy
April 5, 1989 as 050/4/1989	dd/mm/yyyy

Time: recognizes times by the combination of the letters, "h", "m", "s", with the delimiter, ":". The designer can use the "hh" or "mm" to insure that hours or minute numbers are always two digits (e.g. "6" is always "06"). Use the tag, "AP" or "ap" to indicate "AM/PM" formatting. Otherwise military (24 hr) formatting is assumed. Table 7 has time formats.

Table 7

To display	Use the code
9:25 PM as 9:25 PM	h:m AP or h:mm AP
8:05 PM as 20:05 PM	h:mm
9:25 PM as 09:25 PM	hh:m AP

USING THE TYPE, COLOR AND BORDER CONTROLS

Fonts can be selected, styled, sized, colored and aligned using the controls on the Format Bar. Like all formatting controls, type, color and border controls can be applied to a single cell or to a range of cells. These controls work identically to similar controls in standard desktop applications. Note that the designer can only apply this formatting to the *entire* text within a cell. The designer cannot select a piece of the text and apply type controls to only that piece.

The Color menu, accessed from the Format Bar, allows the designer to set the text color and background colors for a cell. The designer clicks on the color menu icon to pop-out the color selector, then chooses a swatch to change either text or cell color.

The Border menu, shown in Fig. 12(e), is also accessed from the Format Bar, and lets the designer controls the outline style on the sides of spreadsheet cells.

The designer can apply a variety of line styles to cell edges. To use the Border menu, the designer clicks on the menu icon to pop-out the available border styles.

- 5 The designer can use the icon with no lines, to erase all existing borders from a cell or range of cells. Some of these controls work differently depending on whether the designer has selected a single cell or a range of cells. This lets the designer apply a thin outline around the outside of a rectangular selection, instead of to every cell within a selection.

10 ADJUSTING TEXT WRAPPING

- By default, any text typed within a spreadsheet cell will flow across the cell border into adjacent cells—if it is too large to fit into its own cell (and if there is no text or number in the adjacent cell). The designer can change this behavior by turning text wrapping on. With text wrapping on, text within a cell will wrap at the cell edge to create multiple lines within the same cell. The designer can then adjust the row width so these multiple lines display correctly. To turn on text wrapping, the designer selects the *Wrap Text* command from the FORMAT menu.
- 15

COPYING CELL FORMATS WITH THE FORMAT STAMP

- 20 The Format Stamp is used to apply a set of cell formats to a cell range. With the Format Stamp, the designer can adjust the font type, style, color, alignment and border for a single cell and then apply all those formats to other cells in a single operation. To use the Format Stamp, the designer selects the cell or cell range that has the formatting the designer wants to copy. The designer clicks the
- 25 Format Stamp icon on the Format Bar, then highlights the cell or range to which the designer wants to apply the formatting

The designer can also use the Format Stamp on column or row headers by choosing a column letter or row number, clicking the Format Stamp, and then clicking on the column or row the designer wants the format applied to. If the

designer wants to copy a cell's formatting multiple times, double-click the Format Stamp icon (it will stay in the depressed state), then applies the formatting to all the relevant selections. When the designer is finished applying the formatting, click the Format Stamp icon again to turn it off.

5

Fig. 13(a) shows an example window enabling a user to email a spreadsheet. This window is displayed when the user clicks on "Email this page" 206 (see Fig. 2). The window allows the user to specify a TO email address and a message. When the user presses the SEND button in the window, the window of Fig. 13(b) is displayed.

10

Fig 13(b) shows an example email used to send a link to a spreadsheet. In this example, John Smith has sent a web-based spreadsheet to Sue Jones. The email contains a link (<http://www.blox.com/open?id=002e3b8c4bb8>) to server 104 with an ID of the spreadsheet. When Sue Jones opens the email and clicks on it, a browser will open and display the spreadsheet.

15

4. MACROS

The described embodiments let designers enhance the program themselves using macros. Macros allow the designer to extend the built-in capabilities of the application by writing his own JavaScript code. Certain embodiments will also feature a Macro Gallery where the designer can share the designer's own macro masterpieces and reuse the code of others.

20

Custom functions using Macros

The described embodiment contains a rich library of built-in functions. As a spreadsheet author, the designer combines these functions into cell formulas to make his spreadsheets work. For most people, most of the time, the built-in function set is all that is needed.

25

Sometimes, however, the designer will find himself wishing that the system had a function that it doesn't. Maybe the designer needs to do arithmetic on dates, or find the volume of a sphere, or do a search and replace operation on a bit of

text. Or perhaps the designer needs to do a calculation specific to his company or business. In some of these cases, the designer might suffice with creating a complex cell formula. But even if the designer could, it would probably be difficult to reuse this formula in other cells or other spreadsheets.

- 5 Custom functions are the answer. Using JavaScript, the designer can invent a new spreadsheet function that does exactly what the designer wants.

Here are the hallmarks of a custom function:

- It is invoked as part of a cell formula
- It accepts zero or more arguments, which can be literal values (like numbers) or cell references.
- It returns a single value.
- It does not internally set the value of other cells (see setcell() below).
- It may internally call other built-in or custom functions.

10 In other words, a custom function is just like a built-in function: it returns a value based on passed-in arguments and internal logic.

15 Traditional macros

A macro can:

- get and set the value of multiple spreadsheet cells.
- get and set the value of global variables.
- use timers to conduct periodic processing.
- call other macros or built-in functions.

20 This may sound simple, but the capabilities here are very powerful. By rewriting cell contents, the designer can change entire parts of his spreadsheet based on designer input or other factors. In fact, macros can effectively treat the spreadsheet grid as an output device and dynamically present information in ways quite beyond the capabilities of a traditional spreadsheet.

25

INVOKING A MACRO

In the described embodiment, there are three ways to invoke a macro:

- Enter it into a spreadsheet formula.
- Automatically invoke it at load time using the special `init()` macro.
- Call it from another macro.

From a spreadsheet formula

The designer can enter a macro call into a cell formula just as the designer would a built-in function. Simply type its name following by opening and closing parentheses (and any arguments). Keep in mind that all cell formulas (as opposed to literal values) must begin with an equal sign ("="). Here is a simple example of a cell formula using a macro:

```
=makeLowerCase(B3)
```

In keeping with the case-insensitive nature of formulas, capitalization is not important when referencing a macro in a formula.

A macro will execute whenever the cell is recalculated. This is most useful for custom functions that are designed to return a single value to the formula. However, with careful design, it is possible to invoke more far-reaching macros from a cell. See the Advanced topics section for more information.

The `init()` function

If the designer creates a macro called "`init()`", it will be automatically executed when his spreadsheet loads from server 104 and before any cells start to recalculate. This provides an easy way for the designer to initialize the state of his application by setting up globals, updating cell contents, and starting timers.

From another macro

Naturally, the designer can call one macro from another. To do so, simply reference a macro name as the designer would any other function in JavaScript.

THE MACRO EDITOR

Figs. 14(a)-14(d) show an example spreadsheet created and viewed in accordance with the present invention and including macros. In this example, the cell E7 has an associated macro “theNote,” which has 5 inputs, as shown in the function area 222.

- 5 Fig. 14(b) shows two examples of the macro editor. The macro editor is used to allow the designer to create and modify his macros. To get there, choose *Macros...* from the EDIT menu in Fig. 12(b).

The macro editor is a very simple text editor with these main parts:

- 10 ▪ *The text area.* This is where the designer types in his macro code and perform basic editing operations like insert, delete, copy, cut, paste, and undo. When the designer first opens the macro editor, the text area contains an empty `init()` function to get the designer started.
- 15 ▪ *The function jump menu.* This menu contains the names of all the macro functions currently defined in the text area. To jump to a function, just select its name in the menu.

Clicking OK in the macro editor will save any edits you've made, execute his `init()` function (if any), and recalculate any cells in the spreadsheet that have macro calls in their formulas. In this sense, clicking OK in the macro editor is a lot like re-opening the spreadsheet.

20 WRITING MACROS

- 25 ▪ This section discusses the details of writing macro code. A basic discussion of JavaScript syntax and using JavaScript in web browsers is found in: *JavaScript: The Definitive Guide* (O'Reilly book)

JavaScript vs. macros

25 Macro code is, by and large, standard JavaScript code. It uses the same syntax, control structures, data types, built-in functions and objects, and so on.

This is not too surprising when the user considers that the described embodiment itself is written in JavaScript, and that the browser conveniently supplies a built-in JavaScript interpreter.

What is included and What is not

- 5 All the features of core JavaScript are available to a macro. In addition to the standard data types (scalars, arrays, objects), operators (like +, *, &&, ==, etc.) and statements (like if/else, switch, for, for/in, while, and return) the designer also has access to the core built-in objects like Math and Date.

10 Note that the core JavaScript language is defined separately from any context (like a web browser) in which it is used. This is an important distinction, because the entire DOM (document object model) that the designer may be accessing when scripting is not available in a browser. The DOM - including the window and document objects and their many sub-objects – are not available in macros. If they were, macro code could arbitrarily rewrite or delete portions of the page, which in this case is itself.

15

This is important enough to restate: if the designer macro code tries to access the window or document objects or other parts of the DOM, it will generate an error. These objects do not exist in the macro's scope, so do not try to use them.

20 There are a few parts of the DOM that are so generally useful that we've left them available. Here is a list of these objects and methods:

- alert()
- confirm()
- prompt()
- setTimeout(), clearTimeout()
- 25 ▪ setInterval(), clearInterval()
- navigator
- screen

Note that although these objects and methods are normally properties of the window object, in the macro code they can only be accessed by calling them directly. So calling "screen" will work, while "window.screen" will throw an error.

5 The structure of a macro

A macro looks just like a regular JavaScript function. It begins with the "function" statement, has an optional arguments list, and then has a body of one or more lines of JavaScript. Here is a simple example:

```
10 // returns an all-lowercase version of a string
    function makeLowerCase(aString) {
        return aString.toLowerCase();
    }
```

A set of macros is just a series of these JavaScript function definitions.

Cell references as arguments

15 Assume that we use the above macro in a cell formula:

```
=makeLowerCase( B7 )
```

20 If a cell reference is passed to the macro, is the value of the "aString" argument in the macro code is what the designer might expect: the argument contains the value of cell B7. In other words, as a macro author the designer doesn't have to worry about whether a macro argument is a cell reference or a literal value. The spreadsheet engine takes care of translating cell references into cell values for you.

25 This statement also holds true for passing cell ranges (like A3:C5) into a macro, although the designer may have to do a little extra work to access all the values in the range.

Local and global variables

Local variables

Inside a macro, local variables are declared in the standard fashion:

```
var schmoo;  
var myVar, i, counter = 0;
```

- 5 It is important that the designer uses the "var" statement to declare all variables. If the designer does not, he'll accidentally create a global variable that could, in some circumstances, interfere with the normal operation of the spreadsheet. Thus, declare all variables with "var". (The only exception is a named argument, which is implicitly declared as local by JavaScript.)

10 Global variables and the "g" object

In standard JavaScript, the designer creates a global variable by declaring it outside the scope of any function. Although this is possible in macro code, it is strongly discouraged. Declaring global variables in this manner could, in some circumstances, result in conflicts with the spreadsheet application itself.

- 15 Instead, macros have access to a special global object named "g". Initially this object is empty. Macros can, at any time, read and write properties in this object. This allows the designer to create global values that can be shared across all macros in a spreadsheet.

- Often, a designer will find it easiest to initialize globals in the special init() macro. This ensures that his globals are ready before any other macro code starts executing. Here is an example init() macro that sets several globals:

```
function init() {  
    // set up globals  
    g.inputCell = "B3";  
    g.startPrompt = "Please enter a value to start.";  
    g.lettersUsed = new Object();  
    // other code follows...  
}
```

Note that the designer can also treat spreadsheet cells as "global variables" using the special `getcell()` and `setcell()` functions. This technique, however, displays global values to the designer.

Calling other macros

- 5 To call one macro from another, the designer should call it directly as the designer would any other JavaScript function. Here is an example of a macro that relies on another:

```
10 // returns true if two strings are the same
    //(the comparison is case-insensitive)
    function compareNoCase(str1, str2) {
        var str1NoCase = makeLowerCase(str1);
        var str2NoCase = makeLowerCase(str2);
        return (str1NoCase == str2NoCase);
    }
```

- 15 Just like any JavaScript function call, calls to macros are case-sensitive.

The macro API and the call object

- In addition to calling other macros and native JavaScript methods, macros can also access a simple API through a predefined global object named "call." The call object allows his macro code to take advantage of the built-in function set, as well as other special functions.
- 20

Calling built-in functions

All of the built-in functions of the described embodiment are also available for use in macros. To access a built-in function, preface its name with the "call" prefix. Here is an example of a macro accessing the built-in `trunc()` function:

- ```
25 // formats a floating-point number
 // as a whole-dollar value
 function asWholeDollar(num) {
```

```

 return "$" + call.trunc(num) + ".00";
 }

```

Calls to built-in functions must be in all-lower or all-uppercase. For example, `call.trunc()` and `call.TRUNC()` are both allowed. A mixed case call such as `call.Trunc()` will cause a runtime error.

Note that not all of the built-in functions are useful to macros. For example, the `menu()` function (which formats a cell as a drop-down menu) and the `image()` function (which displays a picture inside a cell) would have no meaning if called directly from a macro.

Special care must be taken when calling web functions from macros. These functions, including `quote()`, `currency()` and `scell()`, load data over the network and therefore do not immediately return their final value.

### **getcell()**

Given a cell reference, the `call.getcell()` function returns the value of a single spreadsheet cell. Note that this function returns the cell's calculated value, not the cell formula (if any). It can accept several different argument formats:

```
call.getcell(cellRefString)
```

- *cellRefString* is a string containing a cell address (like "B3" or "e32")

```
call.getcell(rowNum, colNum)
```

- *rowNum* and *colNum* are integers specifying the cell's row and column location. Rows and columns are numbered starting with 1.

### **setcell()**

Given a cell reference, the `call.setcell()` function overwrites the value of a single spreadsheet cell. It returns null if successful, and an error object otherwise. It can accept several different argument formats:

`call.setcell( cellRefString, value )`

- *cellRefString* is a string containing a cell address (like "B3" or "e32")
- *value* is the new value for the cell

`call.setcell( rowNum, colNum, value )`

- *rowNum* and *colNum* are integers specifying the cell's row and column location. Rows and columns are numbered starting with 1.
  - *value* is the new value for the cell.
- Currently, `setcell()` can only be used to write literal values (like numbers or strings) into a cell. It cannot be used to write formulas. This limitation may be removed in the future.
  - In calculator mode, empty cells do not "exist" from the point of view of a macro. If the designer try to set the value of an empty cell in calculator mode, you'll receive an error. The workaround is to make sure all cells the designer plans to change with `setcell()` are saved with some kind of value.
- This limitation will be removed in the future if possible.

### Global code

As mentioned above, macro code is composed of one or more function definitions. The designer may wonder if the designer can write code outside of any function - in other words, global code.

Although this is possible, it is not advisable. Although global code will execute, there are several potential problems with using global code. There is actually no reason to use global code anyway. If the designer wants to execute code at load

time, use the init() macro. If the designer wants to declare global variables, he should use the predefined g object.

The exceptions to this rule are standard JavaScript comments.

#### Browser compatibility

- 5 The described embodiment runs in the Windows versions of both Internet Explorer 4 or better and Netscape Navigator 4.5 or better (in calculator mode). Support for core JavaScript varies somewhat between these browsers. For example, Navigator 4 supports Array.push() and Array.pop() methods that don't exist in Internet Explorer.
- 10 It is the responsibility of a macro author to test his applications in all target browsers and versions. Code that runs correctly in one browser may generate errors in another. If the designer submits a spreadsheet to the macro gallery that contains macros, the designer must ensure that it runs correctly in all supported browsers. If the designer wants to use a feature that the designer knows is
- 15 available in some - but not all - of the allowed browsers, he should write a browser detect function. Browser detection is a common task in JavaScript. However, it usually involves testing JavaScript's navigator.userAgent property and comparing against a set of known browsers.

#### Handling and generating errors

- 20 Like any JavaScript code, macros will sometimes contain errors. In addition, in some cases the built-in functions will return errors. Macro errors fall into one of two categories:

##### **Syntax errors**

- A syntax error occurs when the designer writes incorrect JavaScript. The
- 25 described embodiment catches syntax errors automatically when the designer clicks "OK" in the Macro Editor dialog. In this case, you'll see an error message appear at the bottom of the dialog. The designer will need to correct the error before saving his macros.

##### **Runtime errors**

A runtime error occurs when a running macro attempts to access a variable or object that doesn't exist, set a property on something that is not an object, and so on. These types of errors are automatically caught by only in Internet Explorer 5 and better. In this browser, the described embodiment creates an error object as the macro's return value. This error object is returned to whatever called the macro in the first place:

- If the offending macro was called directly from a cell formula, the error object "bubbles up" into the cell and is displayed as a [USER\_FUNC!] error. Moving his mouse over the cell displays a ToolTip containing a more detailed error message.
- If the offending macro is the special `init()` macro, the error object is converted into an error dialog displayed to the designer.
- If the offending macro was called by another macro, the error object is simply returned to the calling macro, which is responsible for taking the correct action.

**IMPORTANT:** The error-handling described above only applies to Internet Explorer 5 and better. In other supported browsers, any runtime error in a macro will immediately be sent to the default browser error handler. In some browsers, this will result in an error dialog displayed to the designer. In other browsers, it may display an error message in the status bar. In either case, it is likely that the entire application (not just his macro) will stop functioning. The important point here is that it is extremely important to test his macro applications in all target browsers.

In addition to errors generated by macros, the built-in spreadsheet functions also sometimes return error objects. This usually occurs when the arguments the designer pass to the function do not match the function's expected arguments. If his macro calls a built-in function and there is a chance the arguments will not be correct, the designer should test the return value for an error object (see the next section).



## Error objects and how to recognize them

An error object in is a simple JavaScript object with two properties:

- *error* - A short label for the error message (like "[USER\_FUNC]").
- *tooltip* - A more descriptive error message. If the error is allowed to bubble up into a cell, this message becomes the cell's ToolTip.

As described above, an error object is returned when:

1. An executing macro generates a runtime error in IE5 or better.
2. A built-in function encounters invalid arguments or another special condition.
3. A macro explicitly returns an error object using call.err().

His macro can easily test a value to determine if it is an error object. To do so, use the built-in spreadsheet function iserror(), which returns true if its argument is an error object. Here is an example:

```
var result = aSpecialMacro(10, 4);
if (call.iserror(result))
 return result;
else
 // more code...
```

## Error bubbling

All built-in spreadsheet functions are designed to bubble up an error object. In other words, if a built-in function is passed an error object in one of its arguments, that function will immediately return the same error object. In this way, an error somewhere in a cell formula will always bubble up into the cell itself, where it is displayed to the designer.

A well-behaved macro will do the same. If there is any chance that a macro's arguments might contain an error object, that macro should take the time to test

for this case and return the error object if found. Here is a sample macro that tests all its arguments using the predefined JavaScript "arguments" object and bubbles up any error that is present:

```
function smartAboutErrors(arg1, arg2) {
5 for (var i=0; i < arguments.length; i++)
 if (call.iserror(arguments[i]))
 return arguments[i];
 // more code...
}
```

10 If his macro doesn't do something like this, and the designer starts treating an error object as if it were a number, string, or something else, he will likely get strange results. For example, attempting to use an object in an arithmetic operation will return the JavaScript "NaN" (not a number) value.

### Generating custom errors

15 Just like built-in functions, his macro may need to return its own error object if it encounters something unusual (for example, if it expects two arguments but only gets one). To do this, use the built-in `err()` function, which returns a new error object:

```
call.err(errorType, errorDesc)
```

- 20
- *errorType* is a string containing a short error label
  - *errorDesc* is a more descriptive error message

Using the `iserror()` and `err()` functions, his macros can easily communicate errors to each other and to spreadsheet cells.

### Passing ranges into macros

25 We've already seen how to pass a single cell value from a cell formula into a macro:

=someMacro( E3 )

But what if we want to pass an entire range of cell values? The answer is the same as for built-in functions: simply pass a range reference:

=someMacro( E3:F7 )

- 5     Each individual cell value in the range becomes one argument passed into his macro function. Two-dimensional ranges (those that span more than one row and more than one column) are converted to arguments starting with the upper-left cell and continuing in left-to-right reading order.

10     A macro designed to take a range as input could be defined with many named arguments. However, this technique won't allow the designer to pass in ranges of arbitrary size, because the designer might pass in a range with more values than there are named arguments. Instead, the best way to handle a range is to loop over the predefined arguments object, which is an array containing all the arguments passed into the function. For example, the following macro returns the sum of all  
15     the values in a range, regardless of the range's size:

```
// sums all the values in a range of arbitrary size
function sumRange() {
 var total = 0;
 // check for an empty range
 20 if (arguments.length == 0)
 return call.err("[ERROR]", "empty range!");
 // add 'em up!
 for (var i=0; i < arguments.length; i++)
 total += arguments[i];
 25 return total;
}
```

### Invoking macros from cell formulas

There are several ways to invoke a macro, one of which is to call the macro from a cell formula. Although this technique seems natural, it does have a few subtleties. The most important issue is the timing of when the macro is executed.

Simply put, a macro in a cell formula is executed each time that cell is recalculated. In general, a cell is recalculated when:

1. a cell that is referenced in the cell formula changes.
2. the designer changes the cell formula (spreadsheet mode only, not calculator mode).
3. the spreadsheet loads (only for formulas that contain certain functions).

When a cell needs to be recalculated, it is not usually processed immediately. Instead, it is put in a queue and recalculated as soon as possible.

Thus, if a macro is referenced in a formula, a designer can't always predict when that macro will execute, or how often. For a custom function that just computes a value, this is probably irrelevant. But for a more wide-ranging macro that, for example, rewrites the contents of other cells, this can be a problem. If the designer includes such a macro in a formula, he will want to consider the implications carefully.

Sometimes, however, this situation works to the designer's advantage. For example, say the designer wants to call a macro every time the designer edits the value in a particular cell. To do so, just put a formula into another cell that references the "input" cell:

```
=handleUserInput(A3)
```

In this scenario, every time the value in cell A3 changes, the handlerUserInput macro is called and passed the value in A3.

The built-in if() function provides another way to control when a macro in a formula executes. Consider the following:

```
=if(B1=0, ", doSomethingCool())
```

Assume that cell B1 starts with a value of zero. In this case, the cell displays nothing (actually an empty string). No matter how many times our cell is recalculated, nothing will happen. But as soon as the value of B1 changes to something else (such as 1), our cell will call the doSomethingCool() macro. The value of B1 changes when it is edited by the designer, or another macro could set its value using setcell(). After doSomethingCool() executes, it should probably set the value of B1 back to zero, lest it inadvertently execute again.

Web functions are the built-in functions that call out to the network, or the Internet, to return a value. For example, the quote() function looks up a stock quote by accessing an internet stock server. Because these functions take time to look up their information from the network, they cannot immediately return a final value. Instead, when first called, these functions deliberately return an error object that contains a "[loading]" message. After the real data arrives, the cell is recalculated and the web function now returns the desired value.

This works in cells, but not so well in macros. Calling quote() directly from a macro will result in an error object, not the stock quote the designer wants.

The designer gets data from a web function into a macro by putting the web function into a cell along with a macro:

```
=handleQuote(quote('msft'))
```

A cell with this formula will be recalculated when the spreadsheet opens. At this point the quote() function will return an error object with the "[loading]" message, which will become the sole argument to our handleQuote() macro. Later, when the stock quote information arrives, the cell will recalculate again, this time passing the current value of Microsoft's stock to handleQuote().

Our macro, then, needs to understand that it will be called multiple times, initially passed an error object and later (hopefully) the real value. Here is an example macro designed to do this gracefully:

```

// handles the return value of the quote
// function called in a cell
function handleQuote(input) {
 if (call.iserror(input)) {
 // first, check if we're getting
 // the "loading" message
 if (input.error == "[loading]")
 return ""; // displays nothing in the cell
 // unknown error - just pass it along
 return input;
 }
 // if we're here, we know input is not an error,
 // so we should have the quote
 doSomething(input);
 return "";
}

```

Fig. 14(c) shows an example spreadsheet created and viewed in accordance with the present invention. In the example, cell 4D has an associated menu macro that displays a drop down menu.

Fig. 14(d) shows an example spreadsheet in calculator mode. In calculator mode, the grid is not displayed and the user is not able to alter the formulas associated with the cells. The spreadsheet is used in a fill-in-the-blank mode. The designer requests calculator mode by clicking on a link having a calculator parameter so that the server sends a web page having calculator functionality.

## 5. OPENING AND CLOSING FILES

### Opening Files from the My Files Page

When the user initially accesses the system of the described embodiment from his web browser, the user will typically navigate to his *My Files* section of the

web site (Fig. 16(c)). *My Files* is where each member accesses and manages his files. The described embodiment.com is a secure, password protected web site - so all of his files are, by default, protected from outside access from within his account. The designer has the option of making any file a "public" file, so that the user can share it with others. Files are individually made public or kept private, so the user can share some, while keeping others protected.

To open a file, simply highlight the file by clicking on it. Then click on the "Open > Spreadsheet" command to open the file in Design Mode, or choose the "Open > Calculator" command to open the file as a fill-in-the-blanks Calculator.

#### Opening Files from a Spreadsheet

To open files from within a spreadsheet, select the Open command from the FILE menu. You'll be taken back to the My Files page. Highlight the file of interest and click once more, or click "Open > spreadsheet" or "Open > calculator" from the command list.

#### Closing Spreadsheets

To close a file, choose the Close command from the FILE menu, or click the *close box* in the upper right hand corner of the browser window. If the user has not saved the file recently, the user will be prompted to save changes before the user exits his session.

#### CREATING NEW FILES

To create a new file from within the web site My Files page, simply choose the "New Spreadsheet" link from the column of commands on the left side of the My Files interface. This will automatically open a new document in Spreadsheet Mode. The spreadsheet will open in the default dimensions. Its size can always be changed later with the Set Size and Insert/Delete Rows or Columns commands. The designer can also create a new spreadsheet from within by choosing the New command from the FILE menu.

## SAVING FILES

The *Save* and *Save As...* commands, which are accessed from the FILE menu, let the designer save the file the designer is currently working on. *Save* will overwrite the last saved version of the file, where *Save As...* renames the current file and saves it (under that new name) on the secure servers. Because these files are saved on the servers instead of on his local hard drive, the user can access them from any computer connected to the Internet.

### 6. Gallery

Fig. 15 shows a process of allowing a web page user to embed a spreadsheet in any web page. If a user has a personal web site, he can include one of his spreadsheets directly into his web site. To embed a spreadsheet into a web page in the described embodiment, the user has to make the spreadsheet publicly accessible and go to a “My Files” page (see Fig. 116(c)). Then, the user highlights the file he wants to embed and selects the “Sharing” command from the Action Panel on the right side of the screen. Performing this step will open a dialog box with the appropriate code 1504:

```
<script
language="JavaScript"src=http://www.blox.com/open?mode=e&id=003d785a_c33a></s
cript>
```

Code 1504 includes a DataID parameter and a mode parameter for the embedded spreadsheet. The user has to copy this code 1504 to the clipboard and then paste the code into his web page’s HTML at the location he wants the spreadsheet to appear. In the Sharing dialog, the user first needs to set his file to Public. Embedding the spreadsheet advantageously allows the spreadsheet file to be viewed within the user’s own web page. When a web page designer embeds a spreadsheet on a web page, he is actually adding code 1504 to an HTML page that requests that spreadsheet from the server 104. When this code is downloaded to someone’s web browser from server 104, the browser makes a request to the server 104 to display the spreadsheet of interest. Server 104 then returns



the appropriate Dynamic HTML code for the spreadsheet to that web browser. As discussed above, the embedded HTML page does not include HTML script tags, unlike spreadsheet HTML and calculator HTML. The embedded HTML page includes means to dynamically return the HTML content. These means are “JavaScript include tags.”

- 5 The JavaScript include tags return dynamically created JavaScript reflecting the current change in the spreadsheet or spreadsheet file. The embedded spreadsheet is a fully formed spreadsheet web page that looks identical to the non-embedded spreadsheet web page.

- 10 An embedded web-based spreadsheet treats real-time data differently than does a regular spreadsheet or calculator. If a request sent to server 104 is for a calculator or a spreadsheet, as specified by the mode parameter in the request, server 104 sends an entire web page including functionality to request real-time data. In contrast, if a request is for an embedded calculator (or an embedded spreadsheet), as specified by the mode parameter in the request, server 104 sends spreadsheet HTML that reloads the whole spreadsheet in order to update real-time data.

- 15 Fig. 16(a) is a flow chart showing a log-in process. The process starts in element 1600 and determines whether the user is a private user, in element 1602. The user has the option of making any individual file a “public” file, so that he can share it with others (see Fig. 15). A private user can only view private files if he has logged into the account where the file is listed. If the user is a private user, the process determines whether the user is a member, in element 1604. At this point, the user’s name and password are posted to the server. The server 104 reviews these parameters and verifies that the user has an account with the system, i.e., the user is a member. If the user is not a member, an ERROR message is returned in element 1608, and the user is prompted to sign up with the system, in element 1618. In the alternative, if the user is a member, as determined from member file 126, the system determines, in element 1606, whether the user is the owner of the file he would like to work with. Every Spreadsheet data file 122 contains at least one member ID. If the user ID matches the member ID in the Spreadsheet data file 122, the user is the file owner. If the user is a file owner, the system allows the user to view that file, in element 1612, and the process ends in 1614. Similarly, if the user is a public user who has the URL of the file and wants to be able to view the file outside the

private user's personal account, the system allows the public user to view that file, in element 1612.

If the member is not a file owner, an ERROR message is returned in element 1610 and the user is prompted to work with that particular file as not a file owner. in element 1616. If the user is a public user (he has the URL of the file and wants to be able to view the file outside the private user's personal account) he can view that file, in element 1612.

Fig. 16(b) is a flow chart showing a process of saving data into "My Files." The *Save* and *Save As* commands, which are accessed from the FILE menu, allow a spreadsheet designer to save the file he is currently working with. *Save* will overwrite the last saved version of the file, where *Save As* renames the current file and saves it (under a new name). The process starts in element 1652. In element 1654, the process determines whether spreadsheet designer changed editability. If the designer changed editability, the editability flag is changed from "FALSE" to "TRUE" in client-side Data Array 114, in element 1656. If designer changed the cell's content in a spreadsheet, in element 1658, data content is changed in the Data Array 114, in element 1660. If the designer indicates that he wants to save new data, in element 1662, the server 104 receives a "post" in the form of new data in client-side format, from the browser, in element 1664. In element 1666, the server determines whether the designer is a member who has an account with the system in accordance with member file 126. If the user is a member, the process determines, in element 1668, whether the user is the owner of the file he is working with. In the alternative, if the user is not a member, in element 1622 the user is prompted to register and become a member. If the member is the owner of the file he is working with, the process prompts the user to save the information in place of the original file, in element 1670. In the alternative, if the user is not the owner of the file, he is prompted to save the file, in element 1674. The process then saves information about each cell, including all attributes, such as format, borders, editability, and cell dependency as well as row height and column width into a non-owner account in element 1676. The process ends in element 1678.

Fig. 16(c) shows a "My Files" page listing saved files. The "My Files" page 1690 is a user's personal file manager where each member accesses and manages his files. To access the files from the "My Files" page 1690, the user has to enter his name and

password. The user has the option of making any individual file a “public” file, so that he can share it with others. The upper left panel 1692 of the page lets the user navigate between different major areas of the site. The middle area 1694 of the page displays the user’s list of files. The menu bar 1696 directly above the list of files allows the user to  
5 create new files, import files and images, sort the list of files, and view the files according to their type.

Fig. 18 shows an example of a web-based spreadsheet containing real-time data. The HTML page, including Javascript, to generate this spreadsheet is shown in Table 8.

In summary, the described embodiment of the present invention implements a  
10 web-based spreadsheet. The described embodiment is implemented in Javascript. The web-based spreadsheet includes web data, including links and images from the web and real-time data, including stock quotes and currency conversion information.

In the described embodiment, the data for the spreadsheets are stored in gallery on a server and people in the community are allowed to access each other’s spreadsheets. A  
15 spreadsheet can be emailed and/or embedded in another web page.

While the invention has been described in conjunction with a specific  
embodiment, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art in light of the foregoing description. Accordingly, the present invention is intended to embrace all such alternatives, modifications and  
20 variations as fall within the spirit and scope of the appended claims and equivalents.

## Table 1

```
<html>
<head>
5 <TITLE>the ultimate holiday dinner - Blox.com Spreadsheet</TITLE>

<link rel="stylesheet" type="text/css"
href="/css/static/design_mode_ie_9ea834d0.cssx"/><link rel="stylesheet"
type="text/css" href="/css/spreadsheet_ie4_630ddc74.cssx"/>
10

<style type="text/css">
/* /home/www/template/static/design_mode_ie.style.tpl */

</style>
15

<script language="JavaScript">

 var kTotalJSIncludes = 14;
 var gNumJSIncludesLoaded = 0;
20

 function JSIncludeDoneLoading()
 {
 gNumJSIncludesLoaded++;
 includeModalProgressWidget.style.width =
25 (gNumJSIncludesLoaded/kTotalJSIncludes)*250;
 }

</script>
30
```

```
<script language="JavaScript">
```

```
function WindowIsValid(wnd) {
```

```
 try {
```

5

```
 var x = wnd.name;
```

```
 }
```

```
 catch (error) {
```

```
 return 0;
```

```
 }
```

10

```
 return 1;
```

```
}
```

```
function SafeEval(str) {
```

```
 try {
```

15

```
 eval(str);
```

```
 }
```

```
 catch (error) {
```

```
 return error.description ?
```

```
error.description : "unknown error";
```

20

```
 }
```

```
 return 0;
```

```
}
```

```
</script>
```

25

```
</head>
```

```
<body class="body" scroll="no" oncontextmenu='if ((!window.event.ctrlKey)
```

```
&& (window.event.srcElement.id != "entry")) return false' onLoad="loadDocument()"
```

30

```
onBeforeUnload="if(typeof unloadDocument != 'undefined')unloadDocument()"
```

```

onUnload="if(typeof unloadDocument != 'undefined')unloadDocument()"
onResize="resizeDocument()">

 <!-- later write the contents of this span -->
5

 <script language="JavaScript">

 var content = '<div class="modalLabel">Please wait a moment
10 (the first time the user use this may take a little longer).</div>'
 + '<div class="modalProgressBar">'
 + '<div id="includeModalProgressWidget"
class="modalProgressWidget" style="visibility: visible;">'
 + '</div></div>';

15 var progressDialog = '<table id="includeProgressDialog"
width="100%" height="100%">'
 + '<tr valign="middle"><td align="center"><div class="modal"
STYLE="visibility:visible; position:static;">'
20 + '<table border="0" width="225" cellpadding="0"
cellpadding="0">'
 + '<tr valign="middle">'
 + '<td bgcolor="#ffcc00"><div
class="modalTopLeftBox"></div></td>'
25 + '<td bgcolor="#ffe57d" nowrap>Loading </td>'
 + '</tr>'
 + '<tr>'
 + '<td bgcolor="#ffe57d">
</td>'
30 + '<td><div class="modalContent">' + content + '</div><div
id="modalBottomBar" style="height:10px; overflow:hidden">
</div></td>'

```

```

+ '</tr>'
+ '</table>'
+ '</div></tr></td></table>';

5 document.write(progressDialog);

</script>

<script language="JavaScript">

10 // global mode flag (can be "design", "view", or "embed")
 var kMode = "design";
 var gInitDirtyCells = "";
 var gCellElemMatrix; // 2-D array of the cell elements, use like:
15 gCellElemMatrix[row][column]
 var gRowCount, gColumnCount, gOwnerId=0,
 gAppId=","gAppDescription="";
 var gImported = 0;
 var gAppVersion = 1.0;
20 var gAppAuthor = 'ss';
 var gMacroText = "";
 var gPartnerMenu = null;
 var gPopupMenu = null;
 var kDomain = "blox.com";
25 var kRootUrl = "http://www.blox.com/";
 var gIsMatterhorn = false;
 var gSaveScript = "savebraincell";
 var gSaveLifeboat = "lifeboat";

30 //
 gColumnCount = 6;gRowCount = 24;

```

Figure 1 is a schematic representation of the experimental design. It shows a flow from 'Study design' to 'Data collection' and 'Data analysis'. 'Study design' includes 'Study population' and 'Study protocol'. 'Data collection' includes 'Data source' and 'Data management'. 'Data analysis' includes 'Data processing' and 'Data interpretation'. The flow is indicated by arrows.

5

//

```
widths[1] = 399;
widths[2] = 84;
widths[3] = 73;
heights[2] = 19;
heights[3] = 19;
heights[4] = 19;
heights[5] = 19;
heights[6] = 19;
heights[7] = 31;
heights[8] = 19;
heights[9] = 19;
heights[10] = 19;
heights[11] = 19;
heights[12] = 19;
heights[13] = 19;
heights[14] = 19;
heights[15] = 19;
heights[16] = 19;
heights[17] = 19;
heights[18] = 19;
heights[19] = 19;
heights[20] = 31;
heights[21] = 19;
heights[22] = 19;
heights[23] = 19;
```



}

// after this comment, we add //init cells

gAppId='003d7851\_c33a';

5 gOwnerId='003d76ac\_435d';

gAppDescription='the ultimate holiday dinner ';

var gCellDataArray=[ {entry:'Make the Ultimate Holiday

Dinner',viewSize:'12pt',foreColor:'navy',viewFamily:'Verdana',\_fontWeight:'bold',\_wrapText:'true',\_textAlign:'left',m\_row:1,m\_col:1,i\_nr:'Make the Ultimate Holiday Dinner'},

10 {viewSize:'9pt',foreColor:'navy',viewFamily:'Verdana',\_wrapText:'true',\_textAlign:'left',m\_row:2,m\_col:1},

{entry:'How many total guests are you

having?',locked:'false',viewSize:'9pt',foreColor:'navy',viewFamily:'Verdana',\_wrapText:'true',\_textAlign:'left',m\_row:3,m\_col:1,i\_nr:'How many total guests are you having?'},

15 {entry:'12',dynamic:'12',derived:'12',

i\_tb:['e[13][2],e[14][2],e[19][2],e[15][2],e[17][2],e[21][2],e[23][2]]',locked:'false',viewSize:'9pt',\_widthClue:'80',foreColor:'maroon',\_textAlign:'right',m\_row:3,m\_col:2,i\_nr:'12'},

{locked:'false',viewSize:'9pt',foreColor:'navy',viewFamily:'Verdana',\_wrapText:'true',\_textAlign:'left',m\_row:4,m\_col:1},

20 {foreColor:'maroon',viewSize:'9pt',\_textAlign:'right',m\_row:4,m\_col:2},

{entry:'How many

vegetarians?',locked:'false',viewSize:'9pt',foreColor:'navy',viewFamily:'Verdana',\_wrapText:'true',\_textAlign:'left',m\_row:5,m\_col:1,i\_nr:'How many vegetarians?'},

{entry:'2',dynamic:'2',derived:'2',

25 i\_tb:['e[13][2]]',locked:'false',viewSize:'9pt',\_widthClue:'80',foreColor:'maroon',\_textAlign:'right',m\_row:5,m\_col:2,i\_nr:'2'},

{locked:'true',viewSize:'9pt',foreColor:'navy',viewFamily:'Verdana',\_wrapText:'true',\_textAlign:'left',m\_row:6,m\_col:1},

{foreColor:'maroon',viewSize:'9pt',\_textAlign:'right',m\_row:6,m\_col:2},

30 {entry:'Traditional Holiday Dinner, or something a little more unusual? (Traditional,

Alternate or



```

Parmesan",""))),dynamic:'(_eqr(_cel(\r7c2s0\
Turkey\':(_eqr(_cel(\r7c2s0\),\Alternate\')?\Cornish Game Hens\':(_eqr(_cel(
 \r7c2s0\),\Economy\')?\Chicken Parmesan\':\'))),derived:'Roast Turkey',
i_tb:[e[15][1]],
5 i_rt:[e[7][2]],locked:'false',viewSize:'9pt',foreColor:'navy',viewFamily:'Verdana',_fontW
eight:'bold',_wrapText:'true',_textAlign:'left',m_row:13,m_col:1,i_nr:'Roast Turkey'},
{entry:'12.5',dynamic:'12.5',derived:'12.5',locked:'false',viewSize:'9pt',_widthClue:'80',_te
xtAlign:'right',m_row:13,m_col:2,i_nr:'12.5'},
{entry:'=IF(B7 ="Traditional","pounds",IF(B7 ="Alternate","hens",IF(
10 B7 ="Economy","pieces",""))),dynamic:'(_eqr(_cel(\r7c2s0\
),\Traditional\')?\pounds\':(_eqr(_cel(\r7c2s0\
),\Alternate\')?\hens\':(_eqr(_cel(\r7c2s0\
),\Economy\')?\pieces\':\'))),derived:'pounds',
i_rt:[e[7][2]],textAlign:'left',locked:'false',viewSize:'9pt',m_row:13,m_col:3,i_nr:'pounds
15 },
{entry:'=IF(B7 ="Traditional","Bread Stuffing",IF(B7 ="Alternate","Corn
Bread",IF(B7 ="Economy","Garlic Breadsticks",""))),dynamic:'(_eqr(_cel(
\r7c2s0\),\Traditional\')?\Bread Stuffing\':(_eqr(_cel(\r7c2s0\
),\Alternate\')?\Corn Bread\':(_eqr(_cel(\r7c2s0\
20),\Economy\')?\Garlic Breadsticks\':\'))),derived:'Bread Stuffing',
i_tb:[e[14][2],e[14][3]],
i_rt:[e[7][2]],viewSize:'9pt',foreColor:'navy',viewFamily:'Verdana',_fontWeight:'bold',_
wrapText:'true',_textAlign:'left',m_row:14,m_col:1,i_nr:'Bread Stuffing'},
{entry:'=IF(A14 ="Garlic Breadsticks", B3 *2,if(A14 =""",""", B3
25))),dynamic:'(_eqr(_cel(\r14c1s0\),\Garlic Breadsticks\')?_mul(_cel(
\r3c2s0\),2):(_eqr(_cel(\r14c1s0\),\')?\':_cel(\r3c2s0\
)))',derived:'12',
i_rt:[e[14][1],e[3][2]],locked:'false',viewFormat:'number',viewSize:'9pt',_widthClue:'80',
_textAlign:'right',m_row:14,m_col:2,i_nr:'12'},

```

```

{entry: '=IF(A14 ="Bread Stuffing","cups",if(A14
 ="" ,"" ,"pieces"))',dynamic: '(_eqr(_cel(\r14c1s0\'
),\Bread
Stuffing\'))?\cups\':(_eqr(_cel(\r14c1s0\'
),\'))?\'\:\pieces\')),derived: 'cups',
i_rt: '[e[14][1]]',textAlign: 'left',locked: 'false',viewSize: '9pt',m_row: 14,m_col: 3,i_nr: 'cups'}
5
,
{entry: '=if(A13 ="" ,"" ,"Soup")',dynamic: '(_eqr(_cel(\r13c1s0\'
),\'))?\'\:\Soup\')),derived: 'Soup',
i_tb: '[e[16][1],e[15][2],e[15][3]]',
i_rt: '[e[13][1]]',viewSize: '9pt',foreColor: 'navy',viewFamily: 'Verdana',_fontWeight: 'bold',
10 _wrapText: 'true',_textAlign: 'left',m_row: 15,m_col: 1,i_nr: 'Soup'},
{entry: '12',dynamic: '12',derived: '12',locked: 'false',viewSize: '9pt',_widthClue: '80',_textAli
gn: 'right',m_row: 15,m_col: 2,i_nr: '12'},
{entry: '=if(A15 ="" ,"" ,"cups")',dynamic: '(_eqr(_cel(\r15c1s0\'
),\'))?\'\:\cups\')),derived: 'cups',
15 i_rt: '[e[15][1]]',textAlign: 'left',viewSize: '9pt',m_row: 15,m_col: 3,i_nr: 'cups'},
{entry: '=if(A15 ="" ,"" ," - try a simple corn chowder or spicy bean
soup")',dynamic: '(_eqr(_cel(\r15c1s0\'
),\'))?\'\:\ - try a simple corn chowder or
spicy bean soup\')),derived: ' - try a simple corn chowder or spicy bean soup',
i_rt: '[e[15][1]]',viewSize: '9pt',foreColor: 'navy',viewFamily: 'Verdana',_wrapText: 'true',_te
20 xtAlign: 'left',m_row: 16,m_col: 1,i_nr: ' - try a simple corn chowder or spicy bean soup'},
{entry: '=IF(B7 ="Traditional","Side of Vegetables",IF(B7
 ="Alternate","Stuffed Mushrooms",IF(B7 ="Economy","Side of
Vegetables","")))',dynamic: '(_eqr(_cel(\r7c2s0\'
),\Traditional\'))?\Side of
Vegetables\':(_eqr(_cel(\r7c2s0\'
),\Alternate\'))?\Stuffed
25 Mushrooms\':(_eqr(_cel(\r7c2s0\'
),\Economy\'))?\Side of
Vegetables\:\'))',derived: 'Side of Vegetables',
i_tb: '[e[17][3],e[18][1],e[17][2]]',
i_rt: '[e[7][2]]',viewSize: '9pt',foreColor: 'navy',viewFamily: 'Verdana',_fontWeight: 'bold',_
wrapText: 'true',_textAlign: 'left',m_row: 17,m_col: 1,i_nr: 'Side of Vegetables'},
30 {entry: '=IF(B7 ="Alternate",3* B3 ,if(A17 ="" ,"" ,1* B3
))',dynamic: '(_eqr(_cel(\r7c2s0\'
),\Alternate\'))?_mul(3,_cel(

```

$$\sqrt[3]{2s0} \quad )):(\text{eqr}(\text{cel}(\sqrt[3]{17c1s0}),\backslash\backslash)?\backslash\backslash:_{\text{mul}}(1,\text{cel}(\sqrt[3]{2s0})))',\text{derived}:'12',$$

$$i\_rt:[e[7][2],e[3][2],e[17][1]],\text{locked}:'\text{false}',\text{viewFormat}:'\text{number}',\text{viewSize}:'9\text{pt}',\_widthClue:'80',\_textAlign:'\text{right}',m\_row:17,m\_col:2,i\_nr:'12'\},$$

5 {entry:'=IF( B7 ="Alternate","mushrooms",if( A17  
       ="","", "cups"))',dynamic:'(\text{eqr}(\text{cel}(\sqrt[3]{2s0}),\backslash\text{Alternate}\backslash)?\backslash\text{mushrooms}\backslash:(\text{eqr}(\text{cel}(\sqrt[3]{17c1s0}),\backslash\backslash)?\backslash\backslash:\backslash\text{cups}\backslash))',derived:'cups',  

$$i\_rt:[e[7][2],e[17][1]],\text{textAlign}:'\text{left}',\text{locked}:'\text{false}',\text{viewSize}:'9\text{pt}',m\_row:17,m\_col:3,i\_nr:'cups'\},$$

10 {entry:'=if( A17 ="","", " - try green beans, squash, or a vegetable medley as well")',dynamic:'(\text{eqr}(\text{cel}(\sqrt[3]{17c1s0}),\backslash\backslash)?\backslash\backslash:\backslash - try green beans, squash, or a vegetable medley as well\backslash)',derived:' - try green beans, squash, or a vegetable medley as well',  

$$i\_rt:[e[17][1]],\text{viewSize}:'9\text{pt}',\text{foreColor}:'\text{navy}',\text{viewFamily}:'\text{Verdana}',\_wrapText:'\text{true}',\_textAlign:'\text{left}',m\_row:18,m\_col:1,i\_nr:' - try green beans, squash, or a vegetable medley as well'\},$$

15 {locked:'false',m\\_row:18,m\\_col:3},  
 {entry:'=IF( \$B\$7 ="Traditional","Side of Potatoes",IF( \$B\$7  
 20        ="Alternate","Yams",IF( \$B\$7  
       ="Economy","Yams",""))',dynamic:'(\text{eqr}(\text{cel}(\sqrt[3]{2s0}),\backslash\text{Traditional}\backslash)?\backslash\text{Side of Potatoes}\backslash:(\text{eqr}(\text{cel}(\sqrt[3]{2s0}),\backslash\text{Alternate}\backslash)?\backslash\text{Yams}\backslash:(\text{eqr}(\text{cel}(\sqrt[3]{2s0}),\backslash\text{Economy}\backslash)?\backslash\text{Yams}\backslash:\backslash\backslash)))',derived:'Side of Potatoes',  
 25 i\\_tb:[e[19][2],e[19][3],e[20][1]],  

$$i\_rt:[e[7][2]],\text{viewSize}:'9\text{pt}',\text{foreColor}:'\text{navy}',\text{viewFamily}:'\text{Verdana}',\_fontWeight:'\text{bold}',\_wrapText:'\text{true}',\_textAlign:'\text{left}',m\_row:19,m\_col:1,i\_nr:'Side of Potatoes'\},$$

{entry:'=if( A19 ="","", B3 /2)',dynamic:'(\text{eqr}(\text{cel}(\sqrt[3]{19c1s0}),\backslash\backslash)?\backslash\backslash:\_{\text{div}}(\text{cel}(\sqrt[3]{2s0}),2))',derived:'6',  
 30 i\\_rt:[e[19][1],e[3][2]],viewFormat:'number',viewSize:'9pt',\\_widthClue:'80',\\_textAlign:'right',m\\_row:19,m\\_col:2,i\\_nr:'6'\},

```

{entry:'=if(A19 ="" ,"" , "pounds")',dynamic:'(_eql(_cel(\r19c1s0\
),\')?\'\:\pounds\')',derived:'pounds',
i_rt:[e[19][1]],textAlign:'left',locked:'false',viewSize:'9pt',m_row:19,m_col:3,i_nr:'pound
s'},
5 {entry:'=IF(B7 ="Traditional"," - there\'s more than one way to cook a potato! Try
scalloped, mashed, twice-baked, or even au gratin!",if(A19 ="" ,"" , " - yams are
sweeter than potatoes and can be prepared just as easily, for a different twist on the
holidays!",))',dynamic:'(_eql(_cel(\r7c2s0\),\Traditional\')?\ - there\\\s more
than one way to cook a potato! Try scalloped, mashed, twice-baked, or even au
10 gratin!\':(_eql(_cel(\r19c1s0\),\')?\'\:\ - yams are sweeter than potatoes and can
be prepared just as easily, for a different twist on the holidays!\'))',derived:' - there\'s more
than one way to cook a potato! Try scalloped, mashed, twice-baked, or even au gratin!',
i_rt:[e[7][2],e[19][1]],viewSize:'9pt',foreColor:'navy',viewFamily:'Verdana',_wrapText:'t
rue',_textAlign:'left',m_row:20,m_col:1,i_nr:' - there\'s more than one way to cook a
15 potato! Try scalloped, mashed, twice-baked, or even au gratin!'},
{locked:'true',m_row:20,m_col:3},
{entry:'=IF(B7 ="Traditional","Pumpkin Pie",IF(B7 ="Alternate","Pecan
Pie",IF(B7 ="Economy","Pumpkin Pie", "")))',dynamic:'(_eql(_cel(
\r7c2s0\),\Traditional\')?\Pumpkin Pie\':(_eql(_cel(\r7c2s0\
20),\Alternate\')?\Pecan Pie\':(_eql(_cel(\r7c2s0\
),\Economy\')?\Pumpkin Pie\:\'))',derived:'Pumpkin Pie',
i_tb:[e[21][2],e[21][3],e[22][1]],
i_rt:[e[7][2]],viewSize:'9pt',foreColor:'navy',viewFamily:'Verdana',_fontWeight:'bold',_
wrapText:'true',_textAlign:'left',m_row:21,m_col:1,i_nr:'Pumpkin Pie'},
25 {entry:'=if(A21 ="" ,"" ,ROUND(B3 /8,0))',dynamic:'(_eql(_cel(
\r21c1s0\),\')?\'\:__round(_div(_cel(\r3c2s0\),8,0))',derived:'2',
i_rt:[e[21][1],e[3][2]],viewFormat:'number',viewSize:'9pt',_widthClue:'80',_textAlign:'ri
ght',m_row:21,m_col:2,i_nr:'2'},
{entry:'=if(A21 ="" ,"" , "pies")',dynamic:'(_eql(_cel(\r21c1s0\
30),\')?\'\:\pies\')',derived:'pies',
i_rt:[e[21][1]],textAlign:'left',locked:'false',viewSize:'9pt',m_row:21,m_col:3,i_nr:'pies'},

```

```

{entry:='if(A21 ="" ,"" , " - or try something different, like a Sweet Potato
Pie!"))',dynamic:('(_eqr(_cel(\r21c1s0\
),\')?\'\:\' - or try something different, like a
Sweet Potato Pie!\)'),derived:' - or try something different, like a Sweet Potato Pie!',
i_rt:['e[21][1]'],viewSize:'9pt',foreColor:'navy',viewFamily:'Verdana',_wrapText:'true',_te
5 xtAlign:'left',m_row:22,m_col:1,i_nr:' - or try something different, like a Sweet Potato
Pie!'}},
{entry:='IF(B7 ="Traditional","Hot Apple Cider",IF(B7
="Alternate","Spiced Cranberry Cider",IF(B7 ="Economy","Hot Apple
Cider",""))',dynamic:('(_eqr(_cel(\r7c2s0\
),\'Traditional\')?\'Hot Apple
10 Cider\':(_eqr(_cel(\r7c2s0\
),\'Alternate\')?\'Spiced Cranberry
Cider\':(_eqr(_cel(\r7c2s0\
),\'Economy\')?\'Hot Apple
Cider\':\'))',derived:'Hot Apple Cider',
i_tb:['e[23][2],e[23][3]'],
i_rt:['e[7][2]'],_borderBottom:'solid black
15 1px',viewSize:'9pt',foreColor:'navy',viewFamily:'Verdana',_fontWeight:'bold',_wrapText:
'true',_textAlign:'left',m_row:23,m_col:1,i_nr:'Hot Apple Cider'},
{entry:='if(A23 ="" ,"" , B3 *2)',dynamic:('(_eqr(_cel(\r23c1s0\
),\')?\'\:_mul(_cel(\r3c2s0\
),2))',derived:'24',
i_rt:['e[23][1],e[3][2]'],_borderBottom:'solid black
20 1px',locked:'false',viewFormat:'number',viewSize:'9pt',_widthClue:'80',_textAlign:'right',
m_row:23,m_col:2,i_nr:'24'},
{entry:='if(A23 ="" ,"" , "cups")',dynamic:('(_eqr(_cel(\r23c1s0\
),\')?\'\:\cups\')',derived:'cups',
i_rt:['e[23][1]'],textAlign:'left',_borderBottom:'solid black
25 1px',locked:'false',viewSize:'9pt',m_row:23,m_col:3,i_nr:'cups'}];

var needsRebuilding=false;
var gDerivedFrom="";
var kSaveHostname = "";
30 gMacroText= "";

```

```

</script>

<script language="JavaScript" src="/lib/js/dialog_ie_d6af9e21.jsx"
5 ></script><script language="JavaScript" src="/lib/js/gui_ie_fc55692d.jsx"
 ></script><script language="JavaScript" src="/lib/js/document_ie_ec836dad.jsx"
 ></script><script language="JavaScript" src="/lib/js/browser_detect_ie_6af40f80.jsx"
 ></script><script language="JavaScript" src="/lib/js/cookie_ie_81818cb9.jsx"
 ></script><script language="JavaScript" src="/lib/js/spreadsheet_ie_aa99f61b.jsx"
10 ></script><script language="JavaScript" src="/lib/js/rows_columns_ie_cac582f7.jsx"
 ></script><script language="JavaScript"
 src="/lib/js/interface_spreadsheet_ie_3e5a3560.jsx" ></script><script
 language="JavaScript" src="/lib/js/runtime_ie_38489e48.jsx" ></script><script
 language="JavaScript" src="/lib/js/cell_ie_f1e68dc0.jsx" ></script><script
15 language="JavaScript" src="/lib/js/compiler_ie_574f1484.jsx" ></script><script
 language="JavaScript" src="/lib/js/platform_ie_bb68a125.jsx" ></script><script
 language="JavaScript" src="/lib/js/resource_ie_b70be76d.jsx" ></script><script
 language="JavaScript" src="/lib/js/utility_ie_16a663aa.jsx" ></script>

20 <div id="bulbLogo" style="background-color: #c0c0c0; position:
 absolute; top: 0; left: 0; height: 50; width: 50; visibility: visible;"> <div id="break2" class="break" style="position: absolute; top: 1; left: 47; height:
 50; background-repeat: repeat-y;"></div> </div><div id="menuPalette"
25 class="palette">
 <div id="fileMenu" class="largeMenu"></div>
 <div id="fileSpot" class="largeSpot">File</div>
 <div id="editMenu" class="largeMenu"></div>
 <div id="editSpot" class="largeSpot">Edit</div>
30 <div id="toolsMenu" class="largeMenu"></div>
 <div id="toolsSpot" class="largeSpot">Tools</div>

```



```

<div id="formatMenu" class="largeMenu"></div>
<div id="formatSpot" class="largeSpot">Format</div>
<div id="helpMenu" class="largeMenu"></div>
<div id="helpSpot" class="largeSpot">Help</div>
5 <div id="partnerMenu" class="largeMenu"></div>
 <div id="partnerSpot" class="largeSpot"></div>
 <div id="btnEmail" class="button" title="Email"></div><div id="em1"
class="buttonText">email this page</div>
 </div>
10 <div id="menuDivision" class="division"></div>
 <div id="iconPalette" class="palette">
 <div id="new" class="button" title="New File"></div><div id="open" class="button"
title="Open File"></div><div id="save" class="button" title="Save File"></div><div
id="print" class="button" title="Print"></div><div id="break1" class="break"></div>
15 <div id="cut" class="button" title="Cut Cells"></div><div id="copy" class="button"
title="Copy Cells"></div><div id="paste" class="button" title="Paste Cells"></div><div
id="format" class="button" title="Copy Format of Selected Cells"></div><div
id="break2" class="break"></div>
 <div id="sum" class="button" title="Automatic Sum"></div><div id="break3"
20 class="break"></div>
 <div id="fontMenu" class="smallMenu"></div><input type="text" tabindex=-1
id="fontSpot" class="comboBox" hasFocus=0 onBlur="fontSpot.hasFocus=0">
 <div id="break4" class="break"></div>
 <div id="sizeMenu" class="smallMenu"></div><input type="text" tabindex=-1
25 id="sizeSpot" class="comboBox" hasFocus=0 onBlur="sizeSpot.hasFocus=0">
 <div id="break5" class="break"></div>
 <div id="bold" class="button" title="Bold"></div><div id="italic" class="button"
title="Italic"></div><div id="underline" class="button" title="Underline"></div><div
id="break6" class="break"></div>
30 <div id="colorMenu" class="smallMenu"></div><div id="colorSpot"
class="smallSpot"> color</div>

```



```

5 <div id="fileList" class="largeList">
 <div id="cmdNew" class="largeItem">New</div>
 <div id="cmdOpen" class="largeItem">Open...</div>
 <div id="cmdClose" class="largeItem">Close</div>
 <div id="separator11" class="separator"></div>
10 <div id="cmdSave" class="largeItem">Save</div>
 <div id="cmdSaveAs" class="largeItem">Save As...</div>
 <div id="cmdExcelExport" class="largeItem">Export to Excel...</div>
 <div id="cmdExcelImport" class="largeItem">Import Excel file...</div>
 <div id="separator12" class="separator"></div>
15 <div id="cmdSetSize" class="largeItem">Set Size...</div>
 <div id="separator13" class="separator"></div>
 <div id="cmdPrint" class="largeItem">Print...</div>
 <div id="cmdSummary" class="largeItem">Summary...</div>
20 </div>
 <div id="editList" class="largeList">
 <div id="cmdCut" class="largeItem">Cut</div>
 <div id="cmdCopy" class="largeItem">Copy</div>
 <div id="cmdPaste" class="largeItem">Paste</div>
25 <div id="cmdPasteSpecial" class="largeItem">Paste Values</div>
 <div id="cmdClear" class="largeItem">Clear</div>
 <div id="separator20" class="separator"></div>
 <div id="cmdFillDown" class="largeItem">Fill Down</div>
 <div id="cmdFillRight" class="largeItem">Fill Right</div>
30 <div id="separator21" class="separator"></div>
 <div id="cmdMacros" class="largeItem">Macros...</div>

```

```

</div>
<div id="toolsList" class="largeList">
<div id="cmdInsertRow" class="largeItem">Insert Row</div>
<div id="cmdInsertColumn" class="largeItem">Insert Column</div>
<div id="cmdDeleteRow" class="largeItem">Delete Row</div>
<div id="cmdDeleteColumn" class="largeItem">Delete Column</div>
<div id="separator30" class="separator"></div>
<div id="cmdFitRow" class="largeItem">Autofit Row</div>
<div id="cmdFitColumn" class="largeItem">Autofit Column</div>
<div id="separator31" class="separator"></div>
<div id="cmdRowHeight" class="largeItem">Row Height...</div>
<div id="cmdColumnWidth" class="largeItem">Column Width...</div>
<div id="separator32" class="separator"></div>
<div id="cmdSortAscending" class="largeItem">Sort Ascending</div>
<div id="cmdSortDescending" class="largeItem">Sort Descending</div>
<div id="separator33" class="separator"></div>
<div id="cmdToggleGrid" class="largeItem">Hide Grid</div>
<div id="separator34" class="separator"></div>
<div id="cmdPreview" class="largeItem">Spreadsheet Preview</div>

</div>
<div id="formatList" class="largeList">
<div id="cmdGeneral" class="largeItem">General</div>
<div id="cmdCustom" class="largeItem">Custom...</div>
<div id="separator41" class="separator"></div>
<div id="cmd8901" class="largeItem">8,901</div>
<div id="cmd8901d2" class="largeItem">8,901.2</div>
<div id="cmd8901d22" class="largeItem">8,901.22</div>
<div id="separator42" class="separator"></div>
<div id="cmdDollar2345" class="largeItem">$2,345</div>

```

<div id="cmd6Percent" class="largeItem">6%</div>

<div id="cmd6d7Percent" class="largeItem">6.7%</div>

5 <div id="cmd6d78Percent" class="largeItem">6.78%</div>

<div id="cmd6d789Percent" class="largeItem">6.789%</div>

</div>

m/d/yy

<div id="cmdMDYYYY" class="largeItem">m/d/yyyy</div>

10 <div id="cmdDMYY" class="largeItem">d/m/yy</div>

<div id="cmdDMYYYY" class="largeItem">d/m/yyyy</div>

<div id="separator45" class="separator"></div>

h:mm AM/PM

<div id="cmdHHMM" class="largeItem">hh:mm</div>

15 <div id="separator46" class="separator"></div>

<div id="cmdWrapText" class="largeItem">Wrap Text</div>

<div id="helpList" class="largeList">

20 <div id="cmdContents" class="largeItem">Contents...</div>

Introduction

Basics

Files

25 <div id="cmdNavigating" class="largeItem">Navigating</div>

Editing

<div id="cmdFormatting" class="largeItem">Formatting</div>

Spreadsheets

Macros

30 <div id="separator61" class="separator"></div>

<div id="cmdMenuReference" class="largeItem">Menu reference</div>

<div id="cmdFunctionReference" class="largeItem">Function reference</div>

<div id="separator62" class="separator"></div>

<div id="cmdBugReport" class="largeItem">Report a bug</div>

<div id="cmdAbout" class="largeItem">About...</div>

5

</div>

<div id="partnerList" class="largeList">

</div>

10 <div id="fontList" class="smallList">

<div id="fontArial" class="smallItem">Arial</div>

<div id="fontBookman" class="smallItem">Bookman Old Style</div>

<div id="fontCourier" class="smallItem">Courier</div>

<div id="fontGaramond" class="smallItem">Garamond</div>

15 <div id="fontConsole" class="smallItem">Lucida Console</div>

<div id="fontSymbol" class="smallItem">Symbol</div>

<div id="fontTahoma" class="smallItem">Tahoma</div>

<div id="fontTimesNewRoman" class="smallItem">Times New Roman</div>

<div id="fontVerdana" class="smallItem">Verdana</div>

20

</div>

<div id="sizeList" class="smallList">

<div id="point7" class="smallItem">7 pt</div>

<div id="point8" class="smallItem">8 pt</div>

25 <div id="point9" class="smallItem">9 pt</div>

<div id="point10" class="smallItem">10 pt</div>

<div id="point11" class="smallItem">11 pt</div>

<div id="point12" class="smallItem">12 pt</div>

<div id="point14" class="smallItem">14 pt</div>

30 <div id="point18" class="smallItem">18 pt</div>

<div id="point24" class="smallItem">24 pt</div>

<div id="point36" class="smallItem">36 pt</div>

<div id="point48" class="smallItem">48 pt</div>

<div id="point72" class="smallItem">72 pt</div>

5 </div>

<div id="functionList" class="smallList">

<div id="funcImageUrl" class="smallItem">Image URL</div>

<div id="funcStockQuote" class="smallItem">Stock Quote</div>

<div id="funcLinkUrl" class="smallItem">Web Link</div>

10 <div id="funcCurrency" class="smallItem">Currency Quote</div>

</div>

<div id="borderList" class="smallList" style="position: absolute; top: 0; left: 0; width: 98; height: 98;"> <div id="border10" class="border" style="position: absolute; top:

15 0; left: 0;" title="No border"></div> <div id="border11" class="border" style="position: absolute; top: 0; left: 24;" title="Thick bottom"></div> <div id="border12" class="border" style="position: absolute; top: 0; left: 48;" title="Double bottom"></div>

<div id="border13" class="border" style="position: absolute; top: 0; left: 72;" title="Top rule, double bottom"></div> <div id="border14" class="border"

20 style="position: absolute; top: 24; left: 0;" title="Bottom only"></div> <div id="border15" class="border" style="position: absolute; top: 24; left: 24;" title="Left only"></div> <div id="border16" class="border" style="position: absolute; top: 24; left: 48;" title="Right only"></div> <div id="border17" class="border" style="position: absolute; top: 24; left: 72;" title="Top only"></div> <div id="border18" class="border"

25 style="position: absolute; top: 48; left: 0;" title="Left and right"></div> <div id="border19" class="border" style="position: absolute; top: 48; left: 24;" title="Top and bottom"></div> <div id="border20" class="border" style="position: absolute; top: 48; left: 48;" title="Columns"></div> <div id="border21" class="border"

30 style="position: absolute; top: 48; left: 72;" title="Rows"></div> <div id="border22" class="border" style="position: absolute; top: 72; left: 0;" title="Box"></div> <div id="border23" class="border" style="position: absolute; top: 72; left: 24;"

```

title="Grid"></div> <div id="border24" class="border" style="position: absolute; top:
72; left: 48;" title="Boxed columns"></div> <div id="border25" class="border"
style="position: absolute; top: 72; left: 72;" title="Boxed rows"></div> </div> <div
id="colorList" class="smallList" style="position: absolute; top: 0; left: 0; width: 200;
5 height: 120;"> <div class="heading" style="position: absolute; top: 3;
left: 0; width: 98;">Text Color</div> <div class="heading"
style="position: absolute; top: 3; left: 100; width: 98;">Background</div> <div
id="holder10" class="holder" style="position: absolute; top: 20; left: 2;"></div> <div
id="holder11" class="holder" style="position: absolute; top: 20; left: 26;"></div>
10 <div id="holder12" class="holder" style="position: absolute; top: 20; left:
50;"></div> <div id="holder13" class="holder" style="position: absolute; top: 20; left:
74;"></div> <div id="holder14" class="holder" style="position: absolute; top: 44; left:
2;"></div> <div id="holder15" class="holder" style="position: absolute; top: 44; left:
26;"></div> <div id="holder16" class="holder" style="position: absolute; top: 44; left:
15 50;"></div> <div id="holder17" class="holder" style="position: absolute; top: 44; left:
74;"></div> <div id="holder18" class="holder" style="position: absolute; top: 68; left:
2;"></div> <div id="holder19" class="holder" style="position: absolute; top: 68; left:
26;"></div> <div id="holder20" class="holder" style="position: absolute; top: 68; left:
50;"></div> <div id="holder21" class="holder" style="position: absolute; top: 68; left:
20 74;"></div> <div id="holder22" class="holder" style="position: absolute; top: 92; left:
2;"></div> <div id="holder23" class="holder" style="position: absolute; top: 92; left:
26;"></div> <div id="holder24" class="holder" style="position: absolute; top: 92; left:
50;"></div> <div id="holder25" class="holder" style="position: absolute; top: 92; left:
74;"></div> <div id="holder50" class="holder" style="position: absolute; top: 20; left:
25 100;"></div> <div id="holder51" class="holder" style="position: absolute; top: 20; left:
124;"></div> <div id="holder52" class="holder" style="position: absolute; top: 20; left:
148;"></div> <div id="holder53" class="holder" style="position: absolute; top: 20; left:
172;"></div> <div id="holder54" class="holder" style="position: absolute; top: 44; left:
100;"></div> <div id="holder55" class="holder" style="position: absolute; top: 44; left:
30 124;"></div> <div id="holder56" class="holder" style="position: absolute; top: 44; left:
148;"></div> <div id="holder57" class="holder" style="position: absolute; top: 44; left:

```



```

172;"></div> <div id="holder58" class="holder" style="position: absolute; top: 68; left:
100;"></div> <div id="holder59" class="holder" style="position: absolute; top: 68; left:
124;"></div> <div id="holder60" class="holder" style="position: absolute; top: 68; left:
148;"></div> <div id="holder61" class="holder" style="position: absolute; top: 68; left:
5 172;"></div> <div id="holder62" class="holder" style="position: absolute; top: 92; left:
100;"></div> <div id="holder63" class="holder" style="position: absolute; top: 92; left:
124;"></div> <div id="holder64" class="holder" style="position: absolute; top: 92; left:
148;"></div> <div id="holder65" class="holder" style="position: absolute; top: 92; left:
172;"></div> <div id="swatch10" class="swatch" style="position: absolute; top: 26;
10 left: 8;" title="Black"></div> <div id="swatch11" class="swatch" style="position:
absolute; top: 26; left: 32;" title="Silver"></div> <div id="swatch12" class="swatch"
style="position: absolute; top: 26; left: 56;" title="Gray"></div> <div id="swatch13"
class="swatch" style="position: absolute; top: 26; left: 80;" title="White"></div> <div
id="swatch14" class="swatch" style="position: absolute; top: 50; left: 8;"
15 title="Maroon"></div> <div id="swatch15" class="swatch" style="position:
absolute; top: 50; left: 32;" title="Red"></div> <div id="swatch16" class="swatch"
style="position: absolute; top: 50; left: 56;" title="Purple"></div> <div id="swatch17"
class="swatch" style="position: absolute; top: 50; left: 80;" title="Fuchsia"></div>
<div id="swatch18" class="swatch" style="position: absolute; top: 74; left: 8;"
20 title="Green"></div> <div id="swatch19" class="swatch" style="position: absolute; top:
74; left: 32;" title="Lime"></div> <div id="swatch20" class="swatch" style="position:
absolute; top: 74; left: 56;" title="Olive"></div> <div id="swatch21" class="swatch"
style="position: absolute; top: 74; left: 80;" title="Yellow"></div> <div id="swatch22"
class="swatch" style="position: absolute; top: 98; left: 8;" title="Navy"></div> <div
25 id="swatch23" class="swatch" style="position: absolute; top: 98; left: 32;"
title="Blue"></div> <div id="swatch24" class="swatch" style="position: absolute; top:
98; left: 56;" title="Teal"></div> <div id="swatch25" class="swatch" style="position:
absolute; top: 98; left: 80;" title="Aqua"></div> <div id="swatch50" class="swatch"
style="position: absolute; top: 26; left: 106;" title="Black"></div> <div id="swatch51"
30 class="swatch" style="position: absolute; top: 26; left: 130;" title="Silver"></div>
<div id="swatch52" class="swatch" style="position: absolute; top: 26; left: 154;"

```



```
 <iframe id="saveFrame" src="/save_frame.html" style="display:
none;"></iframe>
 <iframe id="macroFrame" src="/macro_frame" style="display:
none;"></iframe>
5 <iframe id="bugFrame" src="" style="display: none;"></iframe>
 <iframe name="postFrame" src="" style="display: none;"></iframe>
 <form id="postForm" method="POST"></form>
 </body>
</html>
```

10

WHAT IS CLAIMED IS:

1. A method of displaying a web-based spreadsheet, comprising:  
sending a request to a server to retrieve the web-based spreadsheet;  
receiving at least part of a web page in response to the request;  
executing information in the received web page to display the web-based  
spreadsheet;  
executing information in the received web page to allow a to enter  
information into the cells of the web-based spreadsheet; and  
executing information in the received web page to update cells dependent  
of the cells changed by the user.
2. The method of claim 1, wherein sending the request includes sending a request  
from a client to the server.
3. The method of claim 1, wherein the information in the received web page is  
Javascript.
4. The method of claim 1, wherein at least one cell of the web-based spreadsheet  
contains live data that is updated periodically as the spreadsheet is being displayed.
5. The method of claim 4, wherein the live data is stock quotation information.
6. The method of claim 5, wherein the stock quotation information is obtained  
from the server.
7. The method of claim 5, wherein the stock quotation information is obtained  
from a third party.
8. The method of claim 5, where the stock quotation information also includes  
historical information for a stock.

9. The method of claim 4, wherein the live data is currency conversion information.

5           10. The method of claim 9, wherein the currency conversion information is obtained from the server.

11. The method of claim 9, wherein the currency conversion information is obtained from a third party.

10

12. The method of claim 1, wherein at least one cell of the web-based spreadsheet contains a link to a web page.

13. The method of claim 1, wherein at least one cell of the web-based  
15           spreadsheet contains an image obtained from an address on the World Wide Web.

14. The method of claim 13, further comprising: allowing the user to expand the size of the cell to view more of the image.

15           15. The method of claim 1, wherein at least one cell of the web-based spreadsheet contains an image obtained from a data processing device connected to the user via a network.

16. The method of claim 1, where the user is connected to the server via the  
25           World Wide Web.

17. A method of allowing a user to design a web-based spreadsheet, comprising:  
                  executing information in a received web page to display an initial web-based spreadsheet;

30           executing information in a received web page to allow the user to enter information into the cells of the web-based spreadsheet;

sending a number of rows and columns of the web based spreadsheet and  
the information entered by the user to a server for storage on the server; and  
sending a request to the server to retrieve the web-based spreadsheet.

5           18.     The method of claim 17, further comprising e-mailing a link to the  
spreadsheet, including:

allowing the user to click on an “e-mail this page” button; and  
allowing the user to enter a recipient’s address.

10           19.     The method of claim 17, further comprising embedding the spreadsheet in  
a web page to create an embedded HTML web page, comprising:

displaying an HTML code including a spreadsheet ID of the spreadsheet; and  
allowing the user to copy the HTML code and paste it into the web page’s HTML.

15           20.     The method of claim 19, wherein the embedded HTML web page includes  
“JavaScript include” tags.

21.     The method of claim 17, wherein the spreadsheet is displayed on a client  
system.

20

22.     The method of claim 21, wherein JavaScript Dynamic HTML is  
downloaded to the client system, the JavaScript including functionality, format and  
content of the spreadsheet web page.

25           23.     The method of claim 17, wherein the information in the received web page is  
Javascript.

24.     The method of claim 17, wherein at least one cell of the web-based  
spreadsheet contains live data that is updated periodically as the spreadsheet is being  
30     displayed.

25. The method of claim 24, wherein the live data is stock quotation information.

26. The method of claim 25, wherein the stock quotation information is obtained from the server.

5

27. The method of claim 25, wherein the stock quotation information is obtained from a third party.

28. The method of claim 27, where the stock quotation information also includes historical information for a stock.

10

29. The method of claim 28, wherein the live data is currency conversion information.

15

30. The method of claim 28, wherein the currency conversion information is obtained from the server.

31. The method of claim 30, wherein the currency conversion information is obtained from a third party.

20

32. The method of claim 17, wherein at least one cell of the web-based spreadsheet contains a link to a web page.

33. The method of claim 17, wherein at least one cell of the web-based spreadsheet contains an image obtained from an address on the World Wide Web.

25

34. The method of claim 33, further comprising: allowing the user to expand the size of the cell to view more of the image.

35. The method of claim 17, wherein at least one cell of the web-based spreadsheet contains an image obtained from a data processing device connected to the user via a network.

36. The method of claim 17, where the user is connected to the server via the World Wide Web.

37. A computer-implemented method performed by a server data processing system, comprising:

receiving a request, from a client system, for a spreadsheet web page;  
reviewing parameters received with the request for the spreadsheet web page, said parameters include a spreadsheet mode and a data ID; and

sending the requested spreadsheet web page to the client system, based on the parameters received, wherein said spreadsheet web page contains embedded data specific to the requested spreadsheet web page and capable of causing display of a spreadsheet.

38. The method of claim 37, wherein before sending the spreadsheet web page, JavaScript data is embedded into the spreadsheet web page.

39. The method of claim 37, wherein the data ID identifies a file name.

40. The method of claim 37, wherein the server includes data for more than one spreadsheet web page.

41. A method of displaying a web-based spreadsheet, comprising:  
sending a request to a server to retrieve the web-based spreadsheet;  
receiving at least part of a web page in response to the request;  
executing macros in the received web page to display the web-based spreadsheet;

executing macros in the received web page to allow the user to enter information into the cells of the web-based spreadsheet; and



executing macros in the received web page to update cells dependent on the cells changed by the user.

42. The method of claim 41, wherein sending the request includes sending a request from a client to the server.

43. The method of claim 41, wherein the information in the received web page is Javascript.

44. The method of claim 41, wherein at least one cell of the web-based spreadsheet contains live data that is updated periodically as the spreadsheet is being displayed.

45. The method of claim 44, wherein the live data is stock quotation information.

46. The method of claim 45, wherein the stock quotation information is obtained from the server.

47. The method of claim 45, wherein the stock quotation information is obtained from a third party.

48. The method of claim 45, where the stock quotation information also includes historical information for a stock .

49. The method of claim 44, wherein the live data is currency conversion information.

50. The method of claim 49, wherein the currency conversion information is obtained from the server.

51. The method of claim 49, wherein the currency conversion information is obtained from a third party.

52. The method of claim 41, wherein at least one cell of the web-based spreadsheet contains a link to a web page.

53. The method of claim 41, wherein at least one cell of the web-based spreadsheet contains an image obtained from an address on the World Wide Web.

54. The method of claim 53 further comprising: allowing the user to expand the size of the cell to view more of the image.

55. The method of claim 41, wherein at least one cell of the web-based spreadsheet contains an image obtained from a data processing device connected to the user via a network.

56. The method of claim 41, where the user is connected to the server via the World Wide Web.

## CLIENT SIDE, WEB-BASED SPREADSHEET

### ABSTRACT OF THE DISCLOSURE

A method and system that that allows a designer to create "spreadsheet" web  
5 pages, which can then be viewed and used by the designer and/or by other users. The  
described embodiments of the present invention allow people to collaborate and to share  
spreadsheets over the web. The described embodiment allows a user of the spreadsheet  
to email the spreadsheet to others and to embed the spreadsheet into web pages owned by  
the designer or by third parties. A described embodiment of the web-based spreadsheet  
10 allows the designer to specify both web data and real-time data in the cells of the  
"spreadsheet." The web data includes a URL of an image that is to be placed in a cell.  
The web data includes a link to a web page in a cell. The real-time data includes stock  
quotes and currency conversion information in the cells of the spreadsheet. Such data  
reflects a current (or specified) day's stock quote or a current (or specified) currency  
15 conversion value.

# TABLE 8

```

<html>
 <head>
 <TITLE>Currency Comparison - Blox.com BrainMatter
 Spreadsheet</TITLE>

 <link rel="stylesheet" type="text/css"
 href="/css/static/design_mode_ie_9ea834d0.cssx"/><link rel="stylesheet"
 type="text/css" href="/css/spreadsheet_ie4_630ddc74.cssx"/>

 <style type="text/css">
 /* /home/www/template/static/design_mode_ie.style.tpl */

 </style>

 <script language="JavaScript">

 var kTotalJSIncludes = 14;
 var gNumJSIncludesLoaded = 0;

 function JSIncludeDoneLoading()
 {
 gNumJSIncludesLoaded++;
 includeModalProgressWidget.style.width =
 (gNumJSIncludesLoaded/kTotalJSIncludes)*250;
 }

 </script>

 <script language="JavaScript">

 function WindowIsValid(wnd) {
 try {
 var x = wnd.name;
 }
 catch (error) {
 return 0;
 }
 return 1;
 }

 function SafeEval(str) {
 try {
 eval(str);
 }
 catch (error) {
 return error.description ?
error.description : "unknown error";
 }
 return 0;
 }

 </script>

 </head>

 <body class="body" scroll="no" oncontextmenu='if
 ((!window.event.ctrlKey) && (window.event.srcElement.id != "entry"))
 return false' onLoad="loadDocument()" onBeforeUnload="if(typeof
 unloadDocument != 'undefined')unloadDocument()" onUnload="if(typeof
 unloadDocument != 'undefined')unloadDocument()"
 onResize="resizeDocument()">
 <span class='view' id='view' style="width: 100%; height:
 100%;">

```

```

 <!-- later write the contents of this span -->

 <script language="JavaScript">

 var content = '<div class="modalLabel">Please wait a
moment (the first time you use BrainMatter this may take a little
longer).</div>'
 + '<div class="modalProgressBar">'
 + '<div id="includeModalProgressWidget"
class="modalProgressWidget" style="visibility: visible;">'
 + '</div></div>';

 var progressDialog = '<table
id="includeProgressDialog" width="100%" height="100%">'
 + '<tr valign="middle"><td align="center"><div
class="modal" STYLE="visibility:visible; position:static;">'
 + '<table border="0" width="225" cellpadding="0"
cellpadding="0">'
 + '<tr valign="middle">'
 + '<td bgcolor="#ffcc00"><div
class="modalTopLeftBox"></div></td>'
 + '<td bgcolor="#ffe57d" nowrap>Loading BrainMatter</td>'
 + '</tr>'
 + '<tr>'
 + '<td bgcolor="#ffe57d">
</td>'
 + '<td><div class="modalContent">' + content +
'</div><div id="modalBottomBar" style="height:10px;
overflow:hidden">
</div></td>'
 + '</tr>'
 + '</table>'
 + '</div></tr></td></table>';

 document.write(progressDialog);

 </script>

 <script language="JavaScript">

 // global mode flag (can be "design", "view", or
"embed")
 var kMode = "design";
 var gInitDirtyCells = "";
 var gCellElemMatrix; // 2-D array of the cell
elements, use like: gCellElemMatrix[row][column]
 var gRowCount, gColumnCount, gOwnerId=0,
gAppId='',gAppDescription='';
 var gImported = 0;
 var gAppVersion = 1.0;
 var gAppAuthor = 'ss';
 var gMacroText = '';
 var gPartnerMenu = null;
 var gPopupMenu = null;
 var kDomain = "blox.com";
 var kRootUrl = "http://www.blox.com/";
 var gIsMatterhorn = false;
 var gSaveScript = "savebraincell";
 var gSaveLifeboat = "lifeboat";

 //
gColumnCount = 6;gRowCount = 41;

 function GetColumnWidthsAndHeights(widths, heights)

```

```

{
 //
widths[1] = 74;
widths[2] = 76;
widths[3] = 128;
widths[4] = 127;
widths[5] = 73;
heights[3] = 23;
heights[4] = 23;
heights[5] = 23;
heights[7] = 23;
heights[8] = 19;
heights[9] = 19;
heights[10] = 19;
heights[11] = 19;
heights[12] = 19;
heights[13] = 19;
heights[14] = 19;
heights[15] = 19;
heights[16] = 19;
heights[17] = 19;
heights[18] = 19;
heights[19] = 19;
heights[20] = 19;
heights[21] = 19;
heights[22] = 19;
heights[23] = 19;
heights[24] = 19;
heights[25] = 19;
heights[26] = 19;
heights[27] = 19;
heights[28] = 19;
heights[29] = 19;
heights[30] = 19;
heights[31] = 19;
heights[32] = 19;
heights[33] = 19;
heights[34] = 19;
heights[35] = 19;
heights[36] = 19;
heights[37] = 19;
heights[38] = 19;
heights[39] = 19;
heights[40] = 19;

}

// after this comment, we add //init cells
gAppId='003d728a_9c9b';
gOwnerId='001ee26b_21c3';
gAppDescription='Currency Comparison';
var gCellDataArray=[{entry:'Currency
Comparison',textAlign:'left',viewSize:'12pt',foreColor:'navy',viewFamily
:'Verdana',fontWeight:'bold',m_row:1,m_col:1,i_nr:'Currency
Comparison'},
{textAlign:'left',viewSize:'12pt',foreColor:'navy',viewFamily:'Verdana',
fontWeight:'bold',m_row:1,m_col:2},
{textAlign:'left',viewSize:'12pt',foreColor:'navy',viewFamily:'Verdana',
fontWeight:'bold',m_row:1,m_col:3},
{textAlign:'left',viewSize:'7pt',foreColor:'navy',viewFamily:'Verdana',_
fontWeight:'bold',m_row:1,m_col:4},
{entry:'=link("http://www.halfbrain.com/cgi-
bin/help.cgi?id=bc_currency_codes","Currency symbol
table")',dynamic:'__link(\'http://www.halfbrain.com/cgi-
bin/help.cgi?id=bc_currency_codes\',\'Currency symbol

```



```

gn:'left',m_row:5,m_col:1,i_nr:'Compare starting:'},
{entry:'3/31/00',dynamic:'11047.000011574075',derived:'11047.00001157407
5',
i_tb:'[e[9][1]]',locked:'false',viewFormat:'dateMDYY',viewSize:'9pt',for
eColor:'maroon',viewFamily:'Verdana',_textAlign:'left',m_row:5,m_col:3,i
nr:'3/31/00'},
{entry:'Increment
every:',viewSize:'9pt',foreColor:'navy',viewFamily:'Verdana',_textAlign:
'left',m_row:6,m_col:1,i_nr:'Increment every:'},
{entry:'1',dynamic:'1',derived:'1',
i_tb:'[e[10][1],e[11][1],e[12][1],e[13][1],e[14][1],e[15][1],e[16][1],e[
17][1],e[18][1],e[19][1],e[20][1],e[21][1],e[22][1],e[23][1],e[24][1],e[
25][1],e[26][1],e[27][1],e[28][1],e[29][1],e[30][1],e[31][1],e[32][1],e[
33][1],e[34][1],e[35][1],e[36][1],e[37][1],e[38][1],e[39][1]]',_viewForm
at:'custom',foreColor:'maroon',_textAlign:'left',locked:'false',viewSize
:'9pt',negativeFormat:'-### days',positiveFormat:'###
days',viewFamily:'Verdana',m_row:6,m_col:3,i_nr:'1 days'},
{textAlign:'left',_borderBottom:'solid black
1px',viewSize:'9pt',viewFamily:'Verdana',m_row:7,m_col:1},
{textAlign:'left',_borderBottom:'solid black
1px',viewSize:'9pt',viewFamily:'Verdana',m_row:7,m_col:2},
{textAlign:'left',_borderBottom:'solid black
1px',viewSize:'9pt',viewFamily:'Verdana',m_row:7,m_col:3},
{textAlign:'left',_borderBottom:'solid black
1px',viewSize:'9pt',viewFamily:'Verdana',m_row:7,m_col:4},
{_borderRight:'solid black 1px',m_row:8,m_col:0},
{entry:'Date',viewSize:'9pt',_widthClue:'70',foreColor:'white',bk_color:
'navy',_borderRight:'solid black
1px',viewFamily:'Verdana',_fontWeight:'bold',_textAlign:'center',m_row:8
,m_col:1,i_nr:'Date'},
{entry:'= C3 &"/"& C4 ',dynamic:'_concat(_concat(_cel(\'r3c3
s0\'),\'/\'),_cel(\'r4c3s0\'))',derived:'USD/DEM',
i_rt:'[e[3][3],e[4][3]]',_widthClue:'72',foreColor:'white',bk_color:'nav
y',_textAlign:'center',viewSize:'9pt',_borderRight:'solid black
1px',viewFamily:'Verdana',_fontWeight:'bold',m_row:8,m_col:2,i_nr:'USD/D
EM'},
{entry:'= C4 &"/"& C3 ',dynamic:'_concat(_concat(_cel(\'r4c3
s0\'),\'/\'),_cel(\'r3c3s0\'))',derived:'DEM/USD',
i_rt:'[e[4][3],e[3][3]]',_widthClue:'124',foreColor:'white',bk_color:'na
vy',_textAlign:'center',viewSize:'9pt',_borderRight:'solid black
1px',viewFamily:'Verdana',_fontWeight:'bold',m_row:8,m_col:3,i_nr:'DEM/U
SD'},
{entry:'="% change of "& C3 ',dynamic:'_concat(\'"% change of
\',_cel(\'r3c3s0\'))',derived:'% change of USD',
i_rt:'[e[3][3]]',textAlign:'left',viewSize:'9pt',foreColor:'white',bk_co
lor:'navy',_borderRight:'solid black
1px',viewFamily:'Verdana',_fontWeight:'bold',m_row:8,m_col:4,i_nr:'%
change of USD'},
{_borderRight:'solid black 1px',m_row:9,m_col:0},
{entry:'= C5 ',dynamic:'_cel(\'r5c3s0\')',derived:'11047.000011
574075',
i_tb:'[e[9][2],e[10][1]]',
i_rt:'[e[5][3]]',viewFormat:'dateMDDYY',viewSize:'9pt',_widthClue:'70'
,_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:9,m_col:1,i_nr:'03/31/00'},
{entry:'=currency(C3 C4 $A9 "bid")',dynamic:'
_currency(_cel(\'r3c3s0\'),_cel(\'r4c3s0\'),_cel(\'r9c1
s0\'),\'bid\')',derived:'0.4913',
i_tb:'[e[9][3]]',
i_rt:'[e[3][3],e[4][3],e[9][1]]',viewFormat:'currency_2',viewSize:'9pt',
_widthClue:'72',_borderRight:'solid black
1px',viewFamily:'Verdana',_textAlign:'right',m_row:9,m_col:2,i_nr:'$0.49
'},
{entry:'=1/ B9 ',dynamic:'_div(1,_cel(\'r9c2s0\'))',derived:'2.035
4162426216162',

```



```

i_tb: '[e[10][4]]',
i_rt: '[e[9][2]]', viewFormat: 'currency_2', viewSize: '9pt', _widthClue: '124',
borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 9, m_col: 3, i_nr: '$2.04'},
{textAlign: 'left', viewFormat: 'currency_2', viewSize: '9pt', _widthClue: '123',
borderRight: 'solid black 1px', viewFamily: 'Verdana', m_row: 9, m_col: 4},
{borderRight: 'solid black 1px', m_row: 10, m_col: 0},
{entry: '= A9 + C$6 ', dynamic: '_add(_cel(\'r9c1s0\'), _cel(
\'r6c3s0\'))', derived: '11048.000011574075',
i_tb: '[e[10][2],e[11][1]]',
i_rt: '[e[9][1],e[6][3]]', viewFormat: 'dateMDYY', viewSize: '9pt', _widthClue: '70',
borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 10, m_col: 1, i_nr: '4/1/00'},
{entry: '=currency(C$3 , C$4 , A10 , "bid")', dynamic: '_currency(_cel(\'r3c3s0\'), _cel(\'r4c3s0\'), _cel(\'r10c1s0\'), \'bid\')', derived: '0.4883',
i_tb: '[e[10][3]]',
i_rt: '[e[3][3],e[4][3],e[10][1]]', viewFormat: 'currency_2', viewSize: '9pt',
_widthClue: '72', borderRight: 'solid black
1px', viewFamily: 'Verdana', _textAlign: 'right', m_row: 10, m_col: 2, i_nr: '$0.49'},
{entry: '=1/ B10 ', dynamic: '_div(1, _cel(\'r10c2s0\'))', derived: '2.047921359819783',
i_tb: '[e[10][4],e[11][4]]',
i_rt: '[e[10][2]]', viewFormat: 'currency_2', viewSize: '9pt', _widthClue: '124',
borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 10, m_col: 3, i_nr: '$2.05'},
{entry: '= (C10 - C9) / C9 ', dynamic: '_div(_sub(_cel(\'r10c3s0\'), _cel(\'r9c3s0\')), _cel(\'r9c3s0\'))', derived: '0.006143764079459307',
i_rt: '[e[10][3],e[9][3]]', viewFormat: 'currency_2', viewSize: '9pt', _widthClue: '123', borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 10, m_col: 4, i_nr: '$0.01'},
{borderRight: 'solid black 1px', m_row: 11, m_col: 0},
{entry: '= A10 + C$6 ', dynamic: '_add(_cel(\'r10c1s0\'), _cel(\'r6c3s0\'))', derived: '11049.000011574075',
i_tb: '[e[11][2],e[12][1]]',
i_rt: '[e[10][1],e[6][3]]', viewFormat: 'dateMDYY', viewSize: '9pt', _widthClue: '70', borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 11, m_col: 1, i_nr: '4/2/00'},
{entry: '=currency(C$3 , C$4 , A11 , "bid")', dynamic: '_currency(_cel(\'r3c3s0\'), _cel(\'r4c3s0\'), _cel(\'r11c1s0\'), \'bid\')', derived: '0.4884',
i_tb: '[e[11][3]]',
i_rt: '[e[3][3],e[4][3],e[11][1]]', viewFormat: 'currency_2', viewSize: '9pt',
_widthClue: '72', borderRight: 'solid black
1px', viewFamily: 'Verdana', _textAlign: 'right', m_row: 11, m_col: 2, i_nr: '$0.49'},
{entry: '=1/ B11 ', dynamic: '_div(1, _cel(\'r11c2s0\'))', derived: '2.0475020475020473',
i_tb: '[e[11][4],e[12][4]]',
i_rt: '[e[11][2]]', viewFormat: 'currency_2', viewSize: '9pt', _widthClue: '124',
borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 11, m_col: 3, i_nr: '$2.05'},
{entry: '= (C11 - C10) / C10 ', dynamic: '_div(_sub(_cel(\'r11c3s0\'), _cel(\'r10c3s0\')), _cel(\'r10c3s0\'))', derived: '-0.00020475020475030353',
i_rt: '[e[11][3],e[10][3]]', viewFormat: 'currency_2', viewSize: '9pt', _widthClue: '123', borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 11, m_col: 4, i_nr: '($0.00)'},
{borderRight: 'solid black 1px', m_row: 12, m_col: 0},
{entry: '= A11 + C$6 ', dynamic: '_add(_cel(\'r11c1s0\'), _cel(\'r6c3s0\'))', derived: '11050.000011574075',

```

```

i_tb:'[e[12][2],e[13][1]]',
i_rt:'[e[11][1],e[6][3]]',viewFormat:'dateMDYY',viewSize:'9pt',_widthCl
ue:'70',_borderRight:'solid black
lpx',viewFamily:'Verdana',m_row:12,m_col:1,i_nr:'4/3/00'},
{entry:'=currency(C3 , C4 , $A12 ,"bid")',dynamic:'
currency(_cel(\r3c3s0\ '),_cel(\r4c3s0\ '),_cel(\r12c
1s0\ '),\bid\ '),'derived:'0.4886',
i_tb:'[e[12][3]]',
i_rt:'[e[3][3],e[4][3],e[12][1]]',viewFormat:'currency_2',viewSize:'9pt'
,_widthClue:'72',_borderRight:'solid black
lpx',viewFamily:'Verdana',_textAlign:'right',m_row:12,m_col:2,i_nr:'$0.4
9'},
{entry:'=1/ B12 ',dynamic:'_div(1,_cel(\r12c2s0\ '))',derived:'2.046
663937781416',
i_tb:'[e[12][4],e[13][4]]',
i_rt:'[e[12][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124
',_borderRight:'solid black
lpx',viewFamily:'Verdana',m_row:12,m_col:3,i_nr:'$2.05'},
{entry:'=(C12 -
C11)/ C11 ',dynamic:'_div(_sub(_cel(\r12c3s0\ '),_cel
(\r11c3s0\ ')),_cel(\r11c3s0\ '))',derived:'-
0.0004093327875562496',
i_rt:'[e[12][3],e[11][3]]',viewFormat:'currency_2',viewSize:'9pt',_width
Clue:'123',_borderRight:'solid black
lpx',viewFamily:'Verdana',m_row:12,m_col:4,i_nr:'($0.00)',
{borderRight:'solid black lpx',m_row:13,m_col:0},
{entry:'= A12 + C$6 ',dynamic:'_add(_cel(\r12c1s0\ '),_cel
(\r6c3s0\ ')),derived:'11051.000011574075',
i_tb:'[e[13][2],e[14][1]]',
i_rt:'[e[12][1],e[6][3]]',viewFormat:'dateMDYY',viewSize:'9pt',_widthCl
ue:'70',_borderRight:'solid black
lpx',viewFamily:'Verdana',m_row:13,m_col:1,i_nr:'4/4/00'},
{entry:'=currency(C3 , C4 , $A13 ,"bid")',dynamic:'
currency(_cel(\r3c3s0\ '),_cel(\r4c3s0\ '),_cel(\r13c
1s0\ '),\bid\ '),'derived:'0.4895',
i_tb:'[e[13][3]]',
i_rt:'[e[3][3],e[4][3],e[13][1]]',viewFormat:'currency_2',viewSize:'9pt'
,_widthClue:'72',_borderRight:'solid black
lpx',viewFamily:'Verdana',_textAlign:'right',m_row:13,m_col:2,i_nr:'$0.4
9'},
{entry:'=1/ B13 ',dynamic:'_div(1,_cel(\r13c2s0\ '))',derived:'2.042
9009193054135',
i_tb:'[e[13][4],e[14][4]]',
i_rt:'[e[13][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124
',_borderRight:'solid black
lpx',viewFamily:'Verdana',m_row:13,m_col:3,i_nr:'$2.04'},
{entry:'=(C13 -
C12)/ C12 ',dynamic:'_div(_sub(_cel(\r13c3s0\ '),_cel
(\r12c3s0\ ')),_cel(\r12c3s0\ '))',derived:'-
0.0018386108273749136',
i_rt:'[e[13][3],e[12][3]]',viewFormat:'currency_2',viewSize:'9pt',_width
Clue:'123',_borderRight:'solid black
lpx',viewFamily:'Verdana',m_row:13,m_col:4,i_nr:'($0.00)',
{borderRight:'solid black lpx',m_row:14,m_col:0},
{entry:'= A13 + C$6 ',dynamic:'_add(_cel(\r13c1s0\ '),_cel
(\r6c3s0\ ')),derived:'11052.000011574075',
i_tb:'[e[14][2],e[15][1]]',
i_rt:'[e[13][1],e[6][3]]',viewFormat:'dateMDYY',viewSize:'9pt',_widthCl
ue:'70',_borderRight:'solid black
lpx',viewFamily:'Verdana',m_row:14,m_col:1,i_nr:'4/5/00'},
{entry:'=currency(C3 , C4 , $A14 ,"bid")',dynamic:'
currency(_cel(\r3c3s0\ '),_cel(\r4c3s0\ '),_cel(\r14c
1s0\ '),\bid\ '),'derived:'0.4918',
i_tb:'[e[14][3]]',
i_rt:'[e[3][3],e[4][3],e[14][1]]',viewFormat:'currency_2',viewSize:'9pt'

```

```

, _widthClue:'72', _borderRight:'solid black
1px',viewFamily:'Verdana',_textAlign:'right',m_row:14,m_col:2,i_nr:'$0.4
9'}},
{entry:'=1/ B14 ',dynamic:'_div(1,_cel(\'r14c2s0\'))',derived:'2.033
34688897926',
i_tb:'[e[14][4],e[15][4]]',
i_rt:'[e[14][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124
',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:14,m_col:3,i_nr:'$2.03'},
{entry:'=(C14 -
C13)/ C13 ',dynamic:'_div(_sub(_cel(\'r14c3s0\'),_cel
(\'r13c3s0\')),_cel(\'r13c3s0\'))',derived:'-
0.004676697844652212',
i_rt:'[e[14][3],e[13][3]]',viewFormat:'currency_2',viewSize:'9pt',_width
Clue:'123',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:14,m_col:4,i_nr:'($0.00)'},
{borderRight:'solid black 1px',m_row:15,m_col:0},
{entry:'= A14 + C$6 ',dynamic:'_add(_cel(\'r14c1s0\'),_cel
(\'r6c3s0\'))',derived:'11053.000011574075',
i_tb:'[e[15][2],e[16][1]]',
i_rt:'[e[14][1],e[6][3]]',_viewFormat:'dateMDYY',viewSize:'9pt',_widthCl
ue:'70',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:15,m_col:1,i_nr:'4/6/00'},
{entry:'=currency(C3 , C4 , $A15 ,"bid")',dynamic:'
_currency(_cel(\'r3c3s0\'),_cel(\'r4c3s0\'),_cel(\'r15c
1s0\'),\'bid\')',derived:'0.4926',
i_tb:'[e[15][3]]',
i_rt:'[e[3][3],e[4][3],e[15][1]]',viewFormat:'currency_2',viewSize:'9pt'
,_widthClue:'72',_borderRight:'solid black
1px',viewFamily:'Verdana',_textAlign:'right',m_row:15,m_col:2,i_nr:'$0.4
9'}},
{entry:'=1/ B15 ',dynamic:'_div(1,_cel(\'r15c2s0\'))',derived:'2.030
0446609825417',
i_tb:'[e[15][4],e[16][4]]',
i_rt:'[e[15][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124
',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:15,m_col:3,i_nr:'$2.03'},
{entry:'=(C15 -
C14)/ C14 ',dynamic:'_div(_sub(_cel(\'r15c3s0\'),_cel
(\'r14c3s0\')),_cel(\'r14c3s0\'))',derived:'-
0.0016240357287859556',
i_rt:'[e[15][3],e[14][3]]',viewFormat:'currency_2',viewSize:'9pt',_width
Clue:'123',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:15,m_col:4,i_nr:'($0.00)'},
{borderRight:'solid black 1px',m_row:16,m_col:0},
{entry:'= A15 + C$6 ',dynamic:'_add(_cel(\'r15c1s0\'),_cel
(\'r6c3s0\'))',derived:'11054.000011574075',
i_tb:'[e[16][2],e[17][1]]',
i_rt:'[e[15][1],e[6][3]]',_viewFormat:'dateMDYY',viewSize:'9pt',_widthCl
ue:'70',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:16,m_col:1,i_nr:'4/7/00'},
{entry:'=currency(C3 , C4 , $A16 ,"bid")',dynamic:'
_currency(_cel(\'r3c3s0\'),_cel(\'r4c3s0\'),_cel(\'r16c
1s0\'),\'bid\')',derived:'0.4899',
i_tb:'[e[16][3]]',
i_rt:'[e[3][3],e[4][3],e[16][1]]',viewFormat:'currency_2',viewSize:'9pt'
,_widthClue:'72',_borderRight:'solid black
1px',viewFamily:'Verdana',_textAlign:'right',m_row:16,m_col:2,i_nr:'$0.4
9'}},
{entry:'=1/ B16 ',dynamic:'_div(1,_cel(\'r16c2s0\'))',derived:'2.041
2329046744233',
i_tb:'[e[16][4],e[17][4]]',
i_rt:'[e[16][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124
',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:16,m_col:3,i_nr:'$2.04'},

```

```

{entry:'=(C16 -
 C15)/ C15 ',dynamic:'_div(_sub(_cel(\r16c3s0\ '),_cel
(\r15c3s0\ ')),_cel(\r15c3s0\ '))',derived:'0.005511328842620
846',
i_rt:'[e[16][3],e[15][3]]',viewFormat:'currency_2',viewSize:'9pt',_width
Clue:'123',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:16,m_col:4,i_nr:'$0.01'},
{ _borderRight:'solid black 1px',m_row:17,m_col:0},
{entry:'= A16 + C$6 ',dynamic:'_add(_cel(\r16c1s0\ '),_cel
(\r6c3s0\ ')),',derived:'11055.000011574075',
i_tb:'[e[17][2],e[18][1]]',
i_rt:'[e[16][1],e[6][3]]',_viewFormat:'dateMDYY',viewSize:'9pt',_widthCl
ue:'70',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:17,m_col:1,i_nr:'4/8/00'},
{entry:'=currency(C$3 , C$4 , A17 , "bid")',dynamic:'
_currency(_cel(\r3c3s0\ '),_cel(\r4c3s0\ '),_cel(\r17c
1s0\ '),\ 'bid\ ')),',derived:'0.4879',
i_tb:'[e[17][3]]',
i_rt:'[e[3][3],e[4][3],e[17][1]]',viewFormat:'currency_2',viewSize:'9pt'
,_widthClue:'72',_borderRight:'solid black
1px',viewFamily:'Verdana',_textAlign:'right',m_row:17,m_col:2,i_nr:'$0.4
9'},
{entry:'=1/ B17 ',dynamic:'_div(1,_cel(\r17c2s0\ '))',derived:'2.049
6003279360524',
i_tb:'[e[17][4],e[18][4]]',
i_rt:'[e[17][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124
',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:17,m_col:3,i_nr:'$2.05'},
{entry:'=(C17 -
 C16)/ C16 ',dynamic:'_div(_sub(_cel(\r17c3s0\ '),_cel
(\r16c3s0\ ')),_cel(\r16c3s0\ '))',derived:'0.004099200655872
093',
i_rt:'[e[17][3],e[16][3]]',viewFormat:'currency_2',viewSize:'9pt',_width
Clue:'123',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:17,m_col:4,i_nr:'$0.00'},
{ _borderRight:'solid black 1px',m_row:18,m_col:0},
{entry:'= A17 + C$6 ',dynamic:'_add(_cel(\r17c1s0\ '),_cel
(\r6c3s0\ ')),',derived:'11056.000011574075',
i_tb:'[e[18][2],e[19][1]]',
i_rt:'[e[17][1],e[6][3]]',_viewFormat:'dateMDYY',viewSize:'9pt',_widthCl
ue:'70',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:18,m_col:1,i_nr:'4/9/00'},
{entry:'=currency(C$3 , C$4 , A18 , "bid")',dynamic:'
_currency(_cel(\r3c3s0\ '),_cel(\r4c3s0\ '),_cel(\r18c
1s0\ '),\ 'bid\ ')),',derived:'0.4879',
i_tb:'[e[18][3]]',
i_rt:'[e[3][3],e[4][3],e[18][1]]',viewFormat:'currency_2',viewSize:'9pt'
,_widthClue:'72',_borderRight:'solid black
1px',viewFamily:'Verdana',_textAlign:'right',m_row:18,m_col:2,i_nr:'$0.4
9'},
{entry:'=1/ B18 ',dynamic:'_div(1,_cel(\r18c2s0\ '))',derived:'2.049
6003279360524',
i_tb:'[e[18][4],e[19][4]]',
i_rt:'[e[18][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124
',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:18,m_col:3,i_nr:'$2.05'},
{entry:'=(C18 -
 C17)/ C17 ',dynamic:'_div(_sub(_cel(\r18c3s0\ '),_cel
(\r17c3s0\ ')),_cel(\r17c3s0\ '))',
i_rt:'[e[18][3],e[17][3]]',viewFormat:'currency_2',viewSize:'9pt',_width
Clue:'123',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:18,m_col:4,i_nr:'$0.00'},
{ _borderRight:'solid black 1px',m_row:19,m_col:0},
{entry:'= A18 + C$6 ',dynamic:'_add(_cel(\r18c1s0\ '),_cel
(\r6c3s0\ ')),',derived:'11057.000011574075',

```

```

i_tb: '[e[19][2],e[20][1]]',
i_rt: '[e[18][1],e[6][3]]',viewFormat:'dateMDYY',viewSize:'9pt',_widthCl
ue:'70',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:19,m_col:1,i_nr:'4/10/00'},
{entry: '=currency(C3 , C4 , $A19 ,"bid")',dynamic: '
currency(_cel(\r3c3s0\'),_cel(\r4c3s0\'),_cel(\r19c
1s0\'),\bid\')',derived:'0.4883',
i_tb: '[e[19][3]]',
i_rt: '[e[3][3],e[4][3],e[19][1]]',viewFormat:'currency_2',viewSize:'9pt'
,_widthClue:'72',_borderRight:'solid black
1px',viewFamily:'Verdana',_textAlign:'right',m_row:19,m_col:2,i_nr:'$0.4
9'},
{entry: '=1/ B19 ',dynamic: '_div(1,_cel(\r19c2s0\'))',derived:'2.047
921359819783',
i_tb: '[e[19][4],e[20][4]]',
i_rt: '[e[19][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124
',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:19,m_col:3,i_nr:'$2.05'},
{entry: '= (C19 -
C18)/ C18 ',dynamic: '_div(_sub(_cel(\r19c3s0\'),_cel
(\r18c3s0\'),_cel(\r18c3s0\'))',derived: '-
0.0008191685439278605',
i_rt: '[e[19][3],e[18][3]]',viewFormat:'currency_2',viewSize:'9pt',_width
Clue:'123',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:19,m_col:4,i_nr:'($0.00)'}},
{borderRight:'solid black 1px',m_row:20,m_col:0},
{entry: '= A19 + C$6 ',dynamic: '_add(_cel(\r19c1s0\'),_cel
(\r6c3s0\'))',derived:'11058.000011574075',
i_tb: '[e[20][2],e[21][1]]',
i_rt: '[e[19][1],e[6][3]]',viewFormat:'dateMDYY',viewSize:'9pt',_widthCl
ue:'70',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:20,m_col:1,i_nr:'4/11/00'},
{entry: '=currency(C3 , C4 , $A20 ,"bid")',dynamic: '
currency(_cel(\r3c3s0\'),_cel(\r4c3s0\'),_cel(\r20c
1s0\'),\bid\')',derived:'0.4919',
i_tb: '[e[20][3]]',
i_rt: '[e[3][3],e[4][3],e[20][1]]',viewFormat:'currency_2',viewSize:'9pt'
,_widthClue:'72',_borderRight:'solid black
1px',viewFamily:'Verdana',_textAlign:'right',m_row:20,m_col:2,i_nr:'$0.4
9'},
{entry: '=1/ B20 ',dynamic: '_div(1,_cel(\r20c2s0\'))',derived:'2.032
9335230737952',
i_tb: '[e[20][4],e[21][4]]',
i_rt: '[e[20][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124
',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:20,m_col:3,i_nr:'$2.03'},
{entry: '= (C20 -
C19)/ C19 ',dynamic: '_div(_sub(_cel(\r20c3s0\'),_cel
(\r19c3s0\'),_cel(\r19c3s0\'))',derived: '-
0.0073185606830657905',
i_rt: '[e[20][3],e[19][3]]',viewFormat:'currency_2',viewSize:'9pt',_width
Clue:'123',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:20,m_col:4,i_nr:'($0.01)'}},
{borderRight:'solid black 1px',m_row:21,m_col:0},
{entry: '= A20 + C$6 ',dynamic: '_add(_cel(\r20c1s0\'),_cel
(\r6c3s0\'))',derived:'11059.000011574075',
i_tb: '[e[21][2],e[22][1]]',
i_rt: '[e[20][1],e[6][3]]',viewFormat:'dateMDYY',viewSize:'9pt',_widthCl
ue:'70',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:21,m_col:1,i_nr:'4/12/00'},
{entry: '=currency(C3 , C4 , $A21 ,"bid")',dynamic: '
currency(_cel(\r3c3s0\'),_cel(\r4c3s0\'),_cel(\r21c
1s0\'),\bid\')',derived:'0.4903',
i_tb: '[e[21][3]]',
i_rt: '[e[3][3],e[4][3],e[21][1]]',viewFormat:'currency_2',viewSize:'9pt'

```

```

, _widthClue: '72', _borderRight: 'solid black
1px', viewFamily: 'Verdana', _textAlign: 'right', m_row: 21, m_col: 2, i_nr: '$0.4
9' },
{ entry: '=1/ B21', dynamic: '_div(1, _cel(\'r21c2s0\'))', derived: '2.039
567611666327',
i_tb: '[e[21][4], e[22][4]]',
i_rt: '[e[21][2]]', viewFormat: 'currency_2', viewSize: '9pt', _widthClue: '124
', _borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 21, m_col: 3, i_nr: '$2.04' },
{ entry: '= (C21 - C20) / C20', dynamic: '_div(_sub(_cel(\'r21c3s0\'), _cel
(\'r20c3s0\')), _cel(\'r20c3s0\'))', derived: '0.003263308178666
2757',
i_rt: '[e[21][3], e[20][3]]', viewFormat: 'currency_2', viewSize: '9pt', _width
Clue: '123', _borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 21, m_col: 4, i_nr: '$0.00' },
{ _borderRight: 'solid black 1px', m_row: 22, m_col: 0 },
{ entry: '= A21 + C$6', dynamic: '_add(_cel(\'r21c1s0\'), _cel
(\'r6c3s0\'))', derived: '11060.000011574075',
i_tb: '[e[22][2], e[23][1]]',
i_rt: '[e[21][1], e[6][3]]', viewFormat: 'dateMDYY', viewSize: '9pt', _widthCl
ue: '70', _borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 22, m_col: 1, i_nr: '4/13/00' },
{ entry: '=currency(C3, C4, $A22, "bid")', dynamic: '
currency(_cel(\'r3c3s0\'), _cel(\'r4c3s0\'), _cel(\'r22c
1s0\'), \'bid\')', derived: '0.4898',
i_tb: '[e[22][3]]',
i_rt: '[e[3][3], e[4][3], e[22][1]]', viewFormat: 'currency_2', viewSize: '9pt'
, _widthClue: '72', _borderRight: 'solid black
1px', viewFamily: 'Verdana', _textAlign: 'right', m_row: 22, m_col: 2, i_nr: '$0.4
9' },
{ entry: '=1/ B22', dynamic: '_div(1, _cel(\'r22c2s0\'))', derived: '2.041
649652919559',
i_tb: '[e[22][4], e[23][4]]',
i_rt: '[e[22][2]]', viewFormat: 'currency_2', viewSize: '9pt', _widthClue: '124
', _borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 22, m_col: 3, i_nr: '$2.04' },
{ entry: '= (C22 - C21) / C21', dynamic: '_div(_sub(_cel(\'r22c3s0\'), _cel
(\'r21c3s0\')), _cel(\'r21c3s0\'))', derived: '0.001020824826459
6891',
i_rt: '[e[22][3], e[21][3]]', viewFormat: 'currency_2', viewSize: '9pt', _width
Clue: '123', _borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 22, m_col: 4, i_nr: '$0.00' },
{ _borderRight: 'solid black 1px', m_row: 23, m_col: 0 },
{ entry: '= A22 + C$6', dynamic: '_add(_cel(\'r22c1s0\'), _cel
(\'r6c3s0\'))', derived: '11061.000011574075',
i_tb: '[e[23][2], e[24][1]]',
i_rt: '[e[22][1], e[6][3]]', viewFormat: 'dateMDYY', viewSize: '9pt', _widthCl
ue: '70', _borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 23, m_col: 1, i_nr: '4/14/00' },
{ entry: '=currency(C3, C4, $A23, "bid")', dynamic: '
currency(_cel(\'r3c3s0\'), _cel(\'r4c3s0\'), _cel(\'r23c
1s0\'), \'bid\')', derived: '0.488',
i_tb: '[e[23][3]]',
i_rt: '[e[3][3], e[4][3], e[23][1]]', viewFormat: 'currency_2', viewSize: '9pt'
, _widthClue: '72', _borderRight: 'solid black
1px', viewFamily: 'Verdana', _textAlign: 'right', m_row: 23, m_col: 2, i_nr: '$0.4
9' },
{ entry: '=1/ B23', dynamic: '_div(1, _cel(\'r23c2s0\'))', derived: '2.049
1803278688523',
i_tb: '[e[23][4], e[24][4]]',
i_rt: '[e[23][2]]', viewFormat: 'currency_2', viewSize: '9pt', _widthClue: '124
', _borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 23, m_col: 3, i_nr: '$2.05' },

```

```

{entry: '= (C23 -
 C22) / C22 ', dynamic: '_div(sub(_cel(\r23c3s0\'), _cel
(\r22c3s0\'), _cel(\r22c3s0\'))', derived: '0.003688524590163
898',
i_rt: '[e[23][3],e[22][3]]', viewFormat: 'currency_2', viewSize: '9pt', _width
Clue: '123', _borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 23, m_col: 4, i_nr: '$0.00'},
{ _borderRight: 'solid black 1px', m_row: 24, m_col: 0},
{entry: '= A23 + C$6 ', dynamic: '_add(_cel(\r23c1s0\'), _cel
(\r6c3s0\'))', derived: '11062.000011574075',
i_tb: '[e[24][2],e[25][1]]',
i_rt: '[e[23][1],e[6][3]]', viewFormat: 'dateMDYY', viewSize: '9pt', _widthCl
ue: '70', _borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 24, m_col: 1, i_nr: '4/15/00'},
{entry: '= currency(C$3 , C$4 , A24 , "bid")', dynamic: '
_currency(_cel(\r3c3s0\'), _cel(\r4c3s0\'), _cel(\r24c
1s0\'), \bid\')', derived: '0.4911',
i_tb: '[e[24][3]]',
i_rt: '[e[3][3],e[4][3],e[24][1]]', viewFormat: 'currency_2', viewSize: '9pt'
, _widthClue: '72', _borderRight: 'solid black
1px', viewFamily: 'Verdana', _textAlign: 'right', m_row: 24, m_col: 2, i_nr: '$0.4
9'},
{entry: '= 1/ B24 ', dynamic: '_div(1, _cel(\r24c2s0\'))', derived: '2.036
245163917736',
i_tb: '[e[24][4],e[25][4]]',
i_rt: '[e[24][2]]', viewFormat: 'currency_2', viewSize: '9pt', _widthClue: '124'
, _borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 24, m_col: 3, i_nr: '$2.04'},
{entry: '= (C24 -
 C23) / C23 ', dynamic: '_div(sub(_cel(\r24c3s0\'), _cel
(\r23c3s0\'), _cel(\r23c3s0\'))', derived: '-
0.006312360008144793',
i_rt: '[e[24][3],e[23][3]]', viewFormat: 'currency_2', viewSize: '9pt', _width
Clue: '123', _borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 24, m_col: 4, i_nr: '($0.01)' },
{ _borderRight: 'solid black 1px', m_row: 25, m_col: 0},
{entry: '= A24 + C$6 ', dynamic: '_add(_cel(\r24c1s0\'), _cel
(\r6c3s0\'))', derived: '11063.000011574075',
i_tb: '[e[25][2],e[26][1]]',
i_rt: '[e[24][1],e[6][3]]', viewFormat: 'dateMDYY', viewSize: '9pt', _widthCl
ue: '70', _borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 25, m_col: 1, i_nr: '4/16/00'},
{entry: '= currency(C$3 , C$4 , A25 , "bid")', dynamic: '
_currency(_cel(\r3c3s0\'), _cel(\r4c3s0\'), _cel(\r25c
1s0\'), \bid\')', derived: '0.4914',
i_tb: '[e[25][3]]',
i_rt: '[e[3][3],e[4][3],e[25][1]]', viewFormat: 'currency_2', viewSize: '9pt'
, _widthClue: '72', _borderRight: 'solid black
1px', viewFamily: 'Verdana', _textAlign: 'right', m_row: 25, m_col: 2, i_nr: '$0.4
9'},
{entry: '= 1/ B25 ', dynamic: '_div(1, _cel(\r25c2s0\'))', derived: '2.035
002035002035',
i_tb: '[e[25][4],e[26][4]]',
i_rt: '[e[25][2]]', viewFormat: 'currency_2', viewSize: '9pt', _widthClue: '124'
, _borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 25, m_col: 3, i_nr: '$2.04'},
{entry: '= (C25 -
 C24) / C24 ', dynamic: '_div(sub(_cel(\r25c3s0\'), _cel
(\r24c3s0\'), _cel(\r24c3s0\'))', derived: '-
0.0006105006105007051',
i_rt: '[e[25][3],e[24][3]]', viewFormat: 'currency_2', viewSize: '9pt', _width
Clue: '123', _borderRight: 'solid black
1px', viewFamily: 'Verdana', m_row: 25, m_col: 4, i_nr: '($0.00)' },
{ _borderRight: 'solid black 1px', m_row: 26, m_col: 0},
{entry: '= A25 + C$6 ', dynamic: '_add(_cel(\r25c1s0\'), _cel

```

```

(\r6c3s0\ ')',derived:'11064.000011574075',
i_tb: '[e[26][2],e[27][1]]',
i_rt: '[e[25][1],e[6][3]]',_viewFormat:'dateMDYY',viewSize:'9pt',_widthClue:'70',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:26,m_col:1,i_nr:'4/17/00'},
{entry: '=currency(C3 , C4 , $A26 ,"bid")',dynamic: '
_currency(_cel(\r3c3s0\ '), _cel(\r4c3s0\ '), _cel(\r26c
1s0\ '), \bid\ ')',derived: '0.4915',
i_tb: '[e[26][3]]',
i_rt: '[e[3][3],e[4][3],e[26][1]]',viewFormat:'currency_2',viewSize:'9pt',
_widthClue:'72',_borderRight:'solid black
1px',viewFamily:'Verdana',_textAlign:'right',m_row:26,m_col:2,i_nr:'$0.4
9'}},
{entry: '=1/ B26 ',dynamic: '_div(1,_cel(\r26c2s0\ '))',derived: '2.034
587995930824',
i_tb: '[e[26][4],e[27][4]]',
i_rt: '[e[26][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124',
_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:26,m_col:3,i_nr:'$2.03'},
{entry: '= (C26 -
C25) / C25 ',dynamic: '_div(_sub(_cel(\r26c3s0\ '), _cel
(\r25c3s0\ ')), _cel(\r25c3s0\ '))',derived: '-
0.00020345879959301057',
i_rt: '[e[26][3],e[25][3]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'123',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:26,m_col:4,i_nr:'($0.00)'},
{ _borderRight:'solid black 1px',m_row:27,m_col:0},
{entry: '= A26 + C$6 ',dynamic: '_add(_cel(\r26c1s0\ '), _cel
(\r6c3s0\ '))',derived: '11065.000011574075',
i_tb: '[e[27][2],e[28][1]]',
i_rt: '[e[26][1],e[6][3]]',_viewFormat:'dateMDYY',viewSize:'9pt',_widthClue:'70',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:27,m_col:1,i_nr:'4/18/00'},
{entry: '=currency(C3 , C4 , $A27 ,"bid")',dynamic: '
_currency(_cel(\r3c3s0\ '), _cel(\r4c3s0\ '), _cel(\r27c
1s0\ '), \bid\ ')',derived: '0.4869',
i_tb: '[e[27][3]]',
i_rt: '[e[3][3],e[4][3],e[27][1]]',viewFormat:'currency_2',viewSize:'9pt',
_widthClue:'72',_borderRight:'solid black
1px',viewFamily:'Verdana',_textAlign:'right',m_row:27,m_col:2,i_nr:'$0.4
9'}},
{entry: '=1/ B27 ',dynamic: '_div(1,_cel(\r27c2s0\ '))',derived: '2.053
8098172109262',
i_tb: '[e[27][4],e[28][4]]',
i_rt: '[e[27][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124',
_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:27,m_col:3,i_nr:'$2.05'},
{entry: '= (C27 -
C26) / C26 ',dynamic: '_div(_sub(_cel(\r27c3s0\ '), _cel
(\r26c3s0\ ')), _cel(\r26c3s0\ '))',derived: '0.009447525159170
171',
i_rt: '[e[27][3],e[26][3]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'123',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:27,m_col:4,i_nr:'$0.01'},
{ _borderRight:'solid black 1px',m_row:28,m_col:0},
{entry: '= A27 + C$6 ',dynamic: '_add(_cel(\r27c1s0\ '), _cel
(\r6c3s0\ '))',derived: '11066.000011574075',
i_tb: '[e[28][2],e[29][1]]',
i_rt: '[e[27][1],e[6][3]]',_viewFormat:'dateMDYY',viewSize:'9pt',_widthClue:'70',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:28,m_col:1,i_nr:'4/19/00'},
{entry: '=currency(C3 , C4 , $A28 ,"bid")',dynamic: '
_currency(_cel(\r3c3s0\ '), _cel(\r4c3s0\ '), _cel(\r28c
1s0\ '), \bid\ ')',derived: '0.4841',
i_tb: '[e[28][3]]',

```



```

i_rt: '[e[3][3],e[4][3],e[28][1]]',viewFormat:'currency_2',viewSize:'9pt'
,_widthClue:'72',_borderRight:'solid black
lpx',viewFamily:'Verdana',_textAlign:'right',m_row:28,m_col:2,i_nr:'$0.4
8'}},
{entry:'=1/ B28 ',dynamic:'_div(1,_cel(\'r28c2s0\'))',derived:'2.065
688907250568',
i_tb: '[e[28][4],e[29][4]]',
i_rt: '[e[28][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124
',_borderRight:'solid black
lpx',viewFamily:'Verdana',m_row:28,m_col:3,i_nr:'$2.07'}},
{entry:'=(C28 -
C27)/_ C27 ',dynamic:'_div(_sub(_cel(\'r28c3s0\'),_cel
(\'r27c3s0\')),_cel(\'r27c3s0\'))',derived:'0.005783928940301
659',
i_rt: '[e[28][3],e[27][3]]',viewFormat:'currency_2',viewSize:'9pt',_width
Clue:'123',_borderRight:'solid black
lpx',viewFamily:'Verdana',m_row:28,m_col:4,i_nr:'$0.01'}},
{ _borderRight:'solid black lpx',m_row:29,m_col:0},
{entry:'= A28 + C$6 ',dynamic:'_add(_cel(\'r28c1s0\'),_cel
(\'r6c3s0\'))',derived:'11067.000011574075',
i_tb: '[e[30][1],e[29][2]]',
i_rt: '[e[28][1],e[6][3]]',_viewFormat:'dateMDYY',viewSize:'9pt',_widthCl
ue:'70',_borderRight:'solid black
lpx',viewFamily:'Verdana',m_row:29,m_col:1,i_nr:'4/20/00'}},
{entry:'=currency(C$3 , C$4 , A29 ,"bid")
',dynamic:'_currency(_cel(\'r3c3s0\'),_cel(\'r4c3s0\'),_cel
(\'r29c1s0\'),\'bid\')',derived:'0.4809',
i_tb: '[e[29][3]]',
i_rt: '[e[3][3],e[4][3],e[29][1]]',viewFormat:'currency_2',viewSize:'9pt'
,_widthClue:'72',_borderRight:'solid black
lpx',viewFamily:'Verdana',_textAlign:'right',m_row:29,m_col:2,i_nr:'$0.4
8'}},
{entry:'=1/ B29 ',dynamic:'_div(1,_cel(\'r29c2s0\'))',derived:'2.079
434393844874',
i_tb: '[e[29][4],e[30][4]]',
i_rt: '[e[29][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124
',_borderRight:'solid black
lpx',viewFamily:'Verdana',m_row:29,m_col:3,i_nr:'$2.08'}},
{entry:'=(C29 -
C28)/_ C28 ',dynamic:'_div(_sub(_cel(\'r29c3s0\'),_cel
(\'r28c3s0\')),_cel(\'r28c3s0\'))',derived:'0.006654190060303
464',
i_rt: '[e[29][3],e[28][3]]',viewFormat:'currency_2',viewSize:'9pt',_width
Clue:'123',_borderRight:'solid black
lpx',viewFamily:'Verdana',m_row:29,m_col:4,i_nr:'$0.01'}},
{ _borderRight:'solid black lpx',m_row:30,m_col:0},
{entry:'= A29 + C$6 ',dynamic:'_add(_cel(\'r29c1s0\'),_cel
(\'r6c3s0\'))',derived:'11068.000011574075',
i_tb: '[e[30][2],e[31][1]]',
i_rt: '[e[29][1],e[6][3]]',_viewFormat:'dateMDYY',viewSize:'9pt',_widthCl
ue:'70',_borderRight:'solid black
lpx',viewFamily:'Verdana',m_row:30,m_col:1,i_nr:'4/21/00'}},
{entry:'=currency(C$3 , C$4 , A30 ,"bid")',dynamic:'
_currency(_cel(\'r3c3s0\'),_cel(\'r4c3s0\'),_cel(\'r30c
1s0\'),\'bid\')',derived:'0.4798',
i_tb: '[e[30][3]]',
i_rt: '[e[3][3],e[4][3],e[30][1]]',viewFormat:'currency_2',viewSize:'9pt'
,_widthClue:'72',_borderRight:'solid black
lpx',viewFamily:'Verdana',_textAlign:'right',m_row:30,m_col:2,i_nr:'$0.4
8'}},
{entry:'=1/ B30 ',dynamic:'_div(1,_cel(\'r30c2s0\'))',derived:'2.084
201750729471',
i_tb: '[e[30][4],e[31][4]]',
i_rt: '[e[30][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124
',_borderRight:'solid black

```

```

1px',viewFamily:'Verdana',m_row:30,m_col:3,i_nr:'$2.08'},
{entry:'=(C30 -
 C29)/ C29 ',dynamic:'_div(_sub(_cel(\r30c3s0\'),_cel
(\r29c3s0\')),_cel(\r29c3s0\'))',derived:'0.002292621925802
5673',
i_rt:'[e[30][3],e[29][3]]',viewFormat:'currency_2',viewSize:'9pt',_width
Clue:'123',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:30,m_col:4,i_nr:'$0.00'},
{borderRight:'solid black 1px',m_row:31,m_col:0},
{entry:'= A30 + C$6 ',dynamic:'_add(_cel(\r30c1s0\'),_cel
(\r6c3s0\')),',derived:'11069.000011574075',
i_tb:'[e[31][2],e[32][1]]',
i_rt:'[e[30][1],e[6][3]]',_viewFormat:'dateMDYY',viewSize:'9pt',_widthCl
ue:'70',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:31,m_col:1,i_nr:'4/22/00'},
{entry:'=currency(C$3 , C$4 , A31 , "bid")',dynamic:'
currency(_cel(\r3c3s0\'),_cel(\r4c3s0\'),_cel(\r31c
1s0\'),\bid\')',derived:'0.4797',
i_tb:'[e[31][3]]',
i_rt:'[e[3][3],e[4][3],e[31][1]]',viewFormat:'currency_2',viewSize:'9pt'
,_widthClue:'72',_borderRight:'solid black
1px',viewFamily:'Verdana',_textAlign:'right',m_row:31,m_col:2,i_nr:'$0.4
8'},
{entry:'=1/ B31 ',dynamic:'_div(1,_cel(\r31c2s0\'))',derived:'2.084
6362309776944',
i_tb:'[e[31][4],e[32][4]]',
i_rt:'[e[31][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124
',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:31,m_col:3,i_nr:'$2.08'},
{entry:'=(C31 -
 C30)/ C30 ',dynamic:'_div(_sub(_cel(\r31c3s0\'),_cel
(\r30c3s0\')),_cel(\r30c3s0\'))',derived:'0.000208463623097
72103',
i_rt:'[e[31][3],e[30][3]]',viewFormat:'currency_2',viewSize:'9pt',_width
Clue:'123',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:31,m_col:4,i_nr:'$0.00'},
{borderRight:'solid black 1px',m_row:32,m_col:0},
{entry:'= A31 + C$6 ',dynamic:'_add(_cel(\r31c1s0\'),_cel
(\r6c3s0\')),',derived:'11070.000011574075',
i_tb:'[e[32][2],e[33][1]]',
i_rt:'[e[31][1],e[6][3]]',_viewFormat:'dateMDYY',viewSize:'9pt',_widthCl
ue:'70',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:32,m_col:1,i_nr:'4/23/00'},
{entry:'=currency(C$3 , C$4 , A32 , "bid")',dynamic:'
currency(_cel(\r3c3s0\'),_cel(\r4c3s0\'),_cel(\r32c
1s0\'),\bid\')',derived:'0.4801',
i_tb:'[e[32][3]]',
i_rt:'[e[3][3],e[4][3],e[32][1]]',viewFormat:'currency_2',viewSize:'9pt'
,_widthClue:'72',_borderRight:'solid black
1px',viewFamily:'Verdana',_textAlign:'right',m_row:32,m_col:2,i_nr:'$0.4
8'},
{entry:'=1/ B32 ',dynamic:'_div(1,_cel(\r32c2s0\'))',derived:'2.082
899395959175',
i_tb:'[e[32][4],e[33][4]]',
i_rt:'[e[32][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124
',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:32,m_col:3,i_nr:'$2.08'},
{entry:'=(C32 -
 C31)/ C31 ',dynamic:'_div(_sub(_cel(\r32c3s0\'),_cel
(\r31c3s0\')),_cel(\r31c3s0\'))',derived:'-
0.0008331597583837563',
i_rt:'[e[32][3],e[31][3]]',viewFormat:'currency_2',viewSize:'9pt',_width
Clue:'123',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:32,m_col:4,i_nr:'($0.00)',
{borderRight:'solid black 1px',m_row:33,m_col:0},

```

```

{entry: '= A32 + C$6 ',dynamic: '_add(_cel(\'r32c1s0\'),_cel
(\'r6c3s0\'))',derived: '11071.000011574075',
i_tb: '[e[33][2],e[34][1]]',
i_rt: '[e[32][1],e[6][3]]',viewFormat: 'dateMDYY',viewSize: '9pt',_widthCl
ue: '70',_borderRight: 'solid black
1px',viewFamily: 'Verdana',m_row:33,m_col:1,i_nr: '4/24/00'},
{entry: '=currency(C$3 , C$4 , A33 , "bid")',dynamic: '_
currency(_cel(\'r3c3s0\'),_cel(\'r4c3s0\'),_cel(\'r33c
1s0\'),\'bid\')',derived: '0.4807',
i_tb: '[e[33][3]]',
i_rt: '[e[3][3],e[4][3],e[33][1]]',viewFormat: 'currency_2',viewSize: '9pt'
,_widthClue: '72',_borderRight: 'solid black
1px',viewFamily: 'Verdana',_textAlign: 'right',m_row:33,m_col:2,i_nr: '$0.4
8'},
{entry: '=1/ B33 ',dynamic: '_div(1,_cel(\'r33c2s0\'))',derived: '2.080
2995631370917',
i_tb: '[e[33][4],e[34][4]]',
i_rt: '[e[33][2]]',viewFormat: 'currency_2',viewSize: '9pt',_widthClue: '124'
,_borderRight: 'solid black
1px',viewFamily: 'Verdana',m_row:33,m_col:3,i_nr: '$2.08'},
{entry: '= (C33 -
C32)/ C32 ',dynamic: '_div(_sub(_cel(\'r33c3s0\'),_cel
(\'r32c3s0\')),_cel(\'r32c3s0\'))',derived: '-
0.0012481797378821994',
i_rt: '[e[33][3],e[32][3]]',viewFormat: 'currency_2',viewSize: '9pt',_width
Clue: '123',_borderRight: 'solid black
1px',viewFamily: 'Verdana',m_row:33,m_col:4,i_nr: '($0.00)'},
{_borderRight: 'solid black 1px',m_row:34,m_col:0},
{entry: '= A33 + C$6 ',dynamic: '_add(_cel(\'r33c1s0\'),_cel
(\'r6c3s0\'))',derived: '11072.000011574075',
i_tb: '[e[34][2],e[35][1]]',
i_rt: '[e[33][1],e[6][3]]',viewFormat: 'dateMDYY',viewSize: '9pt',_widthCl
ue: '70',_borderRight: 'solid black
1px',viewFamily: 'Verdana',m_row:34,m_col:1,i_nr: '4/25/00'},
{entry: '=currency(C$3 , C$4 , A34 , "bid")',dynamic: '_
currency(_cel(\'r3c3s0\'),_cel(\'r4c3s0\'),_cel(\'r34c
1s0\'),\'bid\')',derived: '0.4797',
i_tb: '[e[34][3]]',
i_rt: '[e[3][3],e[4][3],e[34][1]]',viewFormat: 'currency_2',viewSize: '9pt'
,_widthClue: '72',_borderRight: 'solid black
1px',viewFamily: 'Verdana',_textAlign: 'right',m_row:34,m_col:2,i_nr: '$0.4
8'},
{entry: '=1/ B34 ',dynamic: '_div(1,_cel(\'r34c2s0\'))',derived: '2.084
6362309776944',
i_tb: '[e[34][4],e[35][4]]',
i_rt: '[e[34][2]]',viewFormat: 'currency_2',viewSize: '9pt',_widthClue: '124'
,_borderRight: 'solid black
1px',viewFamily: 'Verdana',m_row:34,m_col:3,i_nr: '$2.08'},
{entry: '= (C34 -
C33)/ C33 ',dynamic: '_div(_sub(_cel(\'r34c3s0\'),_cel
(\'r33c3s0\')),_cel(\'r33c3s0\'))',derived: '0.002084636230977
725',
i_rt: '[e[34][3],e[33][3]]',viewFormat: 'currency_2',viewSize: '9pt',_width
Clue: '123',_borderRight: 'solid black
1px',viewFamily: 'Verdana',m_row:34,m_col:4,i_nr: '$0.00'},
{_borderRight: 'solid black 1px',m_row:35,m_col:0},
{entry: '= A34 + C$6 ',dynamic: '_add(_cel(\'r34c1s0\'),_cel
(\'r6c3s0\'))',derived: '11073.000011574075',
i_tb: '[e[35][2],e[36][1]]',
i_rt: '[e[34][1],e[6][3]]',viewFormat: 'dateMDYY',viewSize: '9pt',_widthCl
ue: '70',_borderRight: 'solid black
1px',viewFamily: 'Verdana',m_row:35,m_col:1,i_nr: '4/26/00'},
{entry: '=currency(C$3 , C$4 , A35 , "bid")',dynamic: '_
currency(_cel(\'r3c3s0\'),_cel(\'r4c3s0\'),_cel(\'r35c
1s0\'),\'bid\')',derived: '0.4708',

```

```

i_tb:'[e[35][3]]',
i_rt:'[e[3][3],e[4][3],e[35][1]]',viewFormat:'currency_2',viewSize:'9pt'
,_widthClue:'72',_borderRight:'solid black
1px',viewFamily:'Verdana',_textAlign:'right',m_row:35,m_col:2,i_nr:'$0.4
7'}},
{entry:'=1/ B35 ',dynamic:'_div(1,_cel(\'r35c2s0\'))',derived:'2.124
0441801189464',
i_tb:'[e[35][4],e[36][4]]',
i_rt:'[e[35][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124
',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:35,m_col:3,i_nr:'$2.12'},
{entry:'=(C35 -
 C34)/ C34 ',dynamic:'_div(_sub(_cel(\'r35c3s0\'),_cel
(\'r34c3s0\')),_cel(\'r34c3s0\'))',derived:'0.018903993203058
588',
i_rt:'[e[35][3],e[34][3]]',viewFormat:'currency_2',viewSize:'9pt',_width
Clue:'123',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:35,m_col:4,i_nr:'$0.02'},
{borderRight:'solid black 1px',m_row:36,m_col:0},
{entry:'= A35 + C$6 ',dynamic:'_add(_cel(\'r35c1s0\'),_cel
(\'r6c3s0\'))',derived:'11074.000011574075',
i_tb:'[e[36][2],e[37][1]]',
i_rt:'[e[35][1],e[6][3]]',_viewFormat:'dateMDYY',viewSize:'9pt',_widthCl
ue:'70',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:36,m_col:1,i_nr:'4/27/00'},
{entry:'=currency(C3 , C4 , $A36 ,"bid")',dynamic:'
_currency(_cel(\'r3c3s0\'),_cel(\'r4c3s0\'),_cel(\'r36c
1s0\'),\'bid\')',derived:'0.4722',
i_tb:'[e[36][3]]',
i_rt:'[e[3][3],e[4][3],e[36][1]]',viewFormat:'currency_2',viewSize:'9pt'
,_widthClue:'72',_borderRight:'solid black
1px',viewFamily:'Verdana',_textAlign:'right',m_row:36,m_col:2,i_nr:'$0.4
7'}},
{entry:'=1/ B36 ',dynamic:'_div(1,_cel(\'r36c2s0\'))',derived:'2.117
746717492588',
i_tb:'[e[36][4],e[37][4]]',
i_rt:'[e[36][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124
',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:36,m_col:3,i_nr:'$2.12'},
{entry:'=(C36 -
 C35)/ C35 ',dynamic:'_div(_sub(_cel(\'r36c3s0\'),_cel
(\'r35c3s0\')),_cel(\'r35c3s0\'))',derived:'-
0.002964845404489606',
i_rt:'[e[36][3],e[35][3]]',viewFormat:'currency_2',viewSize:'9pt',_width
Clue:'123',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:36,m_col:4,i_nr:'($0.00)',
{borderRight:'solid black 1px',m_row:37,m_col:0},
{entry:'= A36 + C$6 ',dynamic:'_add(_cel(\'r36c1s0\'),_cel
(\'r6c3s0\'))',derived:'11075.000011574075',
i_tb:'[e[37][2],e[38][1]]',
i_rt:'[e[36][1],e[6][3]]',_viewFormat:'dateMDYY',viewSize:'9pt',_widthCl
ue:'70',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:37,m_col:1,i_nr:'4/28/00'},
{entry:'=currency(C3 , C4 , $A37 ,"bid")',dynamic:'
_currency(_cel(\'r3c3s0\'),_cel(\'r4c3s0\'),_cel(\'r37c
1s0\'),\'bid\')',derived:'0.4649',
i_tb:'[e[37][3]]',
i_rt:'[e[3][3],e[4][3],e[37][1]]',viewFormat:'currency_2',viewSize:'9pt'
,_widthClue:'72',_borderRight:'solid black
1px',viewFamily:'Verdana',_textAlign:'right',m_row:37,m_col:2,i_nr:'$0.4
6'}},
{entry:'=1/ B37 ',dynamic:'_div(1,_cel(\'r37c2s0\'))',derived:'2.151
0002151000216',
i_tb:'[e[37][4],e[38][4]]',
i_rt:'[e[37][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124

```

```

',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:37,m_col:3,i_nr:'$2.15'},
{entry:'=(C37 -
 C36)/ C36 ',dynamic:'_div(_sub(_cel(\r37c3s0\'),_cel
(\r36c3s0\')),_cel(\r36c3s0\'))',derived:'0.015702301570230
184',
i_rt:'[e[37][3],e[36][3]]',viewFormat:'currency_2',viewSize:'9pt',_width
Clue:'123',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:37,m_col:4,i_nr:'$0.02'},
{ _borderRight:'solid black 1px',m_row:38,m_col:0},
{entry:'= A37 + C$6 ',dynamic:'_add(_cel(\r37c1s0\'),_cel
(\r6c3s0\'))',derived:'11076.000011574075',
i_tb:'[e[38][2],e[39][1]]',
i_rt:'[e[37][1],e[6][3]]',_viewFormat:'dateMDYY',viewSize:'9pt',_widthCl
ue:'70',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:38,m_col:1,i_nr:'4/29/00'},
{entry:'=currency(C3 , C4 , $A38 ,"bid")',dynamic:'
_currency(_cel(\r3c3s0\'),_cel(\r4c3s0\'),_cel(\r38c
1s0\'),\bid\')',derived:'0.4659',
i_tb:'[e[38][3]]',
i_rt:'[e[3][3],e[4][3],e[38][1]]',viewFormat:'currency_2',viewSize:'9pt'
,_widthClue:'72',_borderRight:'solid black
1px',viewFamily:'Verdana',_textAlign:'right',m_row:38,m_col:2,i_nr:'$0.4
7'},
{entry:'=1/ B38 ',dynamic:'_div(1,_cel(\r38c2s0\'))',derived:'2.146
38334406525',
i_tb:'[e[38][4],e[39][4]]',
i_rt:'[e[38][2]]',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124
',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:38,m_col:3,i_nr:'$2.15'},
{entry:'=(C38 -
 C37)/ C37 ',dynamic:'_div(_sub(_cel(\r38c3s0\'),_cel
(\r37c3s0\')),_cel(\r37c3s0\'))',derived:'-
0.002146383344065212',
i_rt:'[e[38][3],e[37][3]]',viewFormat:'currency_2',viewSize:'9pt',_width
Clue:'123',_borderRight:'solid black
1px',viewFamily:'Verdana',m_row:38,m_col:4,i_nr:'($0.00)',
{ _borderRight:'solid black 1px',m_row:39,m_col:0},
{entry:'= A38 + C$6 ',dynamic:'_add(_cel(\r38c1s0\'),_cel
(\r6c3s0\'))',derived:'11077.000011574075',
i_tb:'[e[39][2]]',
i_rt:'[e[38][1],e[6][3]]',_borderBottom:'solid black
1px',_viewFormat:'dateMDYY',viewSize:'9pt',_widthClue:'70',_borderRight:
'solid black 1px',viewFamily:'Verdana',m_row:39,m_col:1,i_nr:'4/30/00'},
{entry:'=currency(C3 , C4 , $A39 ,"bid")',dynamic:'
_currency(_cel(\r3c3s0\'),_cel(\r4c3s0\'),_cel(\r39c
1s0\'),\bid\')',derived:'0.4661',
i_tb:'[e[39][3]]',
i_rt:'[e[3][3],e[4][3],e[39][1]]',_borderBottom:'solid black
1px',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'72',_borderRight
:'solid black
1px',viewFamily:'Verdana',_textAlign:'right',m_row:39,m_col:2,i_nr:'$0.4
7'},
{entry:'=1/ B39 ',dynamic:'_div(1,_cel(\r39c2s0\'))',derived:'2.145
462347135808',
i_tb:'[e[39][4]]',
i_rt:'[e[39][2]]',_borderBottom:'solid black
1px',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'124',_borderRigh
t:'solid black 1px',viewFamily:'Verdana',m_row:39,m_col:3,i_nr:'$2.15'},
{entry:'=(C39 -
 C38)/ C38 ',dynamic:'_div(_sub(_cel(\r39c3s0\'),_cel
(\r38c3s0\')),_cel(\r38c3s0\'))',derived:'-
0.0004290924694271972',
i_rt:'[e[39][3],e[38][3]]',_borderBottom:'solid black
1px',viewFormat:'currency_2',viewSize:'9pt',_widthClue:'123',_borderRigh

```

```
t:'solid black
lpx',viewFamily:'Verdana',m_row:39,m_col:4,i_nr:'($0.00)'}));
```

```
var needsRebuilding=false;
var gDerivedFrom='';
var kSaveHostname = "";
gMacroText= "";
```

```
</script>
```

```
<script language="JavaScript"
src="/lib/js/dialog_ie_d6af9e21.jsx" ></script><script
language="JavaScript" src="/lib/js/gui_ie_fc55692d.jsx"
></script><script language="JavaScript"
src="/lib/js/document_ie_ec836dad.jsx" ></script><script
language="JavaScript" src="/lib/js/browser_detect_ie_6af40f80.jsx"
></script><script language="JavaScript"
src="/lib/js/cookie_ie_81818cb9.jsx" ></script><script
language="JavaScript" src="/lib/js/spreadsheet_ie_aa99f61b.jsx"
></script><script language="JavaScript"
src="/lib/js/rows_columns_ie_cac582f7.jsx" ></script><script
language="JavaScript"
src="/lib/js/interface_spreadsheet_ie_3e5a3560.jsx" ></script><script
language="JavaScript" src="/lib/js/runtime_ie_38489e48.jsx"
></script><script language="JavaScript"
src="/lib/js/cell_ie_f1e68dc0.jsx" ></script><script
language="JavaScript" src="/lib/js/compiler_ie_574f1484.jsx"
></script><script language="JavaScript"
src="/lib/js/platform_ie_bb68a125.jsx" ></script><script
language="JavaScript" src="/lib/js/resource_ie_b70be76d.jsx"
></script><script language="JavaScript"
src="/lib/js/utility_ie_16a663aa.jsx" ></script>
```

```
<div id="bulbLogo" style="background-color: #c0c0c0;
position: absolute; top: 0; left: 0; height: 50; width: 50; visibility:
visible;"> <div id="break2" class="break"
style="position: absolute; top: 1; left: 47; height: 50; background-
repeat: repeat-y;"></div> </div><div id="menuPalette"
class="palette">
<div id="fileMenu" class="largeMenu"></div>
<div id="fileSpot" class="largeSpot">File</div>
<div id="editMenu" class="largeMenu"></div>
<div id="editSpot" class="largeSpot">Edit</div>
<div id="toolsMenu" class="largeMenu"></div>
<div id="toolsSpot" class="largeSpot">Tools</div>
<div id="formatMenu" class="largeMenu"></div>
<div id="formatSpot" class="largeSpot">Format</div>
<div id="helpMenu" class="largeMenu"></div>
<div id="helpSpot" class="largeSpot">Help</div>
<div id="partnerMenu" class="largeMenu"></div>
<div id="partnerSpot" class="largeSpot"></div>
<div id="btnEmail" class="button" title="Email"></div><div id="em1"
class="buttonText">email this page</div>
</div>
<div id="menuDivision" class="division"></div>
<div id="iconPalette" class="palette">
<div id="new" class="button" title="New File"></div><div id="open"
class="button" title="Open File"></div><div id="save" class="button"
title="Save File"></div><div id="print" class="button"
title="Print"></div><div id="break1" class="break"></div>
<div id="cut" class="button" title="Cut Cells"></div><div id="copy"
class="button" title="Copy Cells"></div><div id="paste" class="button"
title="Paste Cells"></div><div id="format" class="button" title="Copy
```



```

<div id="cmdSetSize" class="largeItem">Set Size...</div>
<div id="separator13" class="separator"></div>
<div id="cmdPrint" class="largeItem">Print...</div>
<div id="cmdSummary" class="largeItem">Summary...</div>

</div>
<div id="editList" class="largeList">
<div id="cmdCut" class="largeItem">Cut</div>
<div id="cmdCopy" class="largeItem">Copy</div>
<div id="cmdPaste" class="largeItem">Paste</div>
<div id="cmdPasteSpecial" class="largeItem">Paste Values</div>
<div id="cmdClear" class="largeItem">Clear</div>
<div id="separator20" class="separator"></div>
<div id="cmdFillDown" class="largeItem">Fill Down</div>
<div id="cmdFillRight" class="largeItem">Fill Right</div>
<div id="separator21" class="separator"></div>
<div id="cmdMacros" class="largeItem">Macros...</div>

</div>
<div id="toolsList" class="largeList">
<div id="cmdInsertRow" class="largeItem">Insert Row</div>
<div id="cmdInsertColumn" class="largeItem">Insert Column</div>
<div id="cmdDeleteRow" class="largeItem">Delete Row</div>
<div id="cmdDeleteColumn" class="largeItem">Delete Column</div>
<div id="separator30" class="separator"></div>
<div id="cmdFitRow" class="largeItem">Autofit Row</div>
<div id="cmdFitColumn" class="largeItem">Autofit Column</div>
<div id="separator31" class="separator"></div>
<div id="cmdRowHeight" class="largeItem">Row Height...</div>
<div id="cmdColumnWidth" class="largeItem">Column Width...</div>
<div id="separator32" class="separator"></div>
<div id="cmdSortAscending" class="largeItem">Sort Ascending</div>
<div id="cmdSortDescending" class="largeItem">Sort Descending</div>
<div id="separator33" class="separator"></div>
<div id="cmdToggleGrid" class="largeItem">Hide Grid</div>
<div id="separator34" class="separator"></div>
<div id="cmdPreview" class="largeItem">Calculator Preview</div>

</div>
<div id="formatList" class="largeList">
<div id="cmdGeneral" class="largeItem">General</div>
<div id="cmdCustom" class="largeItem">Custom...</div>
<div id="separator41" class="separator"></div>
<div id="cmd8901" class="largeItem">8,901</div>
<div id="cmd8901d2" class="largeItem">8,901.2</div>
<div id="cmd8901d22" class="largeItem">8,901.22</div>
<div id="separator42" class="separator"></div>
<div id="cmdDollar2345" class="largeItem">$2,345</div>
<div id="cmdDollar2345d67" class="largeItem">$2,345.67</div>
<div id="separator43" class="separator"></div>
<div id="cmd6Percent" class="largeItem">6%</div>
<div id="cmd6d7Percent" class="largeItem">6.7%</div>
<div id="cmd6d78Percent" class="largeItem">6.78%</div>
<div id="cmd6d789Percent" class="largeItem">6.789%</div>
<div id="separator44" class="separator"></div>
<div id="cmdMDYY" class="largeItem">m/d/yy</div>
<div id="cmdMDYYYY" class="largeItem">m/d/yyyy</div>
<div id="cmdDMYY" class="largeItem">d/m/yy</div>
<div id="cmdDMYYYY" class="largeItem">d/m/yyyy</div>
<div id="separator45" class="separator"></div>
<div id="cmdHMMAP" class="largeItem">h:mm AM/PM</div>
<div id="cmdHHMM" class="largeItem">hh:mm</div>
<div id="separator46" class="separator"></div>
<div id="cmdWrapText" class="largeItem">Wrap Text</div>

```



```

</div>
<div id="helpList" class="largeList">
<div id="cmdContents" class="largeItem">Contents...</div>
<div id="separator60" class="separator"></div>
<div id="cmdIntroduction" class="largeItem">Introduction</div>
<div id="cmdBasics" class="largeItem">Basics</div>
<div id="cmdFiles" class="largeItem">Files</div>
<div id="cmdNavigating" class="largeItem">Navigating</div>
<div id="cmdEditing" class="largeItem">Editing</div>
<div id="cmdFormatting" class="largeItem">Formatting</div>
<div id="cmdCalculators" class="largeItem">Calculators</div>
<div id="cmdMacrosHelp" class="largeItem">Macros</div>
<div id="separator61" class="separator"></div>
<div id="cmdMenuReference" class="largeItem">Menu reference</div>
<div id="cmdFunctionReference" class="largeItem">Function
reference</div>
<div id="separator62" class="separator"></div>
<div id="cmdBugReport" class="largeItem">Report a bug</div>
<div id="cmdAbout" class="largeItem">About...</div>

</div>
<div id="partnerList" class="largeList">

</div>
<div id="fontList" class="smallList">
<div id="fontArial" class="smallItem">Arial</div>
<div id="fontBookman" class="smallItem">Bookman Old Style</div>
<div id="fontCourier" class="smallItem">Courier</div>
<div id="fontGaramond" class="smallItem">Garamond</div>
<div id="fontConsole" class="smallItem">Lucida Console</div>
<div id="fontSymbol" class="smallItem">Symbol</div>
<div id="fontTahoma" class="smallItem">Tahoma</div>
<div id="fontTimesNewRoman" class="smallItem">Times New Roman</div>
<div id="fontVerdana" class="smallItem">Verdana</div>

</div>
<div id="sizeList" class="smallList">
<div id="point7" class="smallItem">7 pt</div>
<div id="point8" class="smallItem">8 pt</div>
<div id="point9" class="smallItem">9 pt</div>
<div id="point10" class="smallItem">10 pt</div>
<div id="point11" class="smallItem">11 pt</div>
<div id="point12" class="smallItem">12 pt</div>
<div id="point14" class="smallItem">14 pt</div>
<div id="point18" class="smallItem">18 pt</div>
<div id="point24" class="smallItem">24 pt</div>
<div id="point36" class="smallItem">36 pt</div>
<div id="point48" class="smallItem">48 pt</div>
<div id="point72" class="smallItem">72 pt</div>

</div>
<div id="functionList" class="smallList">
<div id="funcImageUrl" class="smallItem">Image URL</div>
<div id="funcStockQuote" class="smallItem">Stock Quote</div>
<div id="funcLinkUrl" class="smallItem">Web Link</div>
<div id="funcCurrency" class="smallItem">Currency Quote</div>

</div>
<div id="borderList" class="smallList" style="position: absolute; top:
0; left: 0; width: 98; height: 98;"> <div id="border10"
class="border" style="position: absolute; top: 0; left: 0;" title="No
border"></div> <div id="border11" class="border" style="position:
absolute; top: 0; left: 24;" title="Thick bottom"></div> <div
id="border12" class="border" style="position: absolute; top: 0; left:
48;" title="Double bottom"></div> <div id="border13" class="border"

```

```

style="position: absolute; top: 0; left: 72;" title="Top rule, double
bottom"></div> <div id="border14" class="border" style="position:
absolute; top: 24; left: 0;" title="Bottom only"></div> <div
id="border15" class="border" style="position: absolute; top: 24; left:
24;" title="Left only"></div> <div id="border16" class="border"
style="position: absolute; top: 24; left: 48;" title="Right
only"></div> <div id="border17" class="border" style="position:
absolute; top: 24; left: 72;" title="Top only"></div> <div id="border18"
class="border" style="position: absolute; top: 48; left: 0;"
title="Left and right"></div> <div id="border19" class="border"
style="position: absolute; top: 48; left: 24;" title="Top and
bottom"></div> <div id="border20" class="border" style="position:
absolute; top: 48; left: 48;" title="Columns"></div> <div id="border21"
class="border" style="position: absolute; top: 48; left: 72;"
title="Rows"></div> <div id="border22" class="border"
style="position: absolute; top: 72; left: 0;" title="Box"></div> <div
id="border23" class="border" style="position: absolute; top: 72; left:
24;" title="Grid"></div> <div id="border24" class="border"
style="position: absolute; top: 72; left: 48;" title="Boxed
columns"></div> <div id="border25" class="border" style="position:
absolute; top: 72; left: 72;" title="Boxed
rows"></div> </div> <div id="colorList" class="smallList"
style="position: absolute; top: 0; left: 0; width: 200; height:
120;"> <div class="heading" style="position:
absolute; top: 3; left: 0; width: 98;">Text Color</div> <div
class="heading" style="position: absolute; top: 3;
left: 100; width: 98;">Background</div> <div id="holder10"
class="holder" style="position: absolute; top: 20; left:
2;"></div> <div id="holder11" class="holder" style="position: absolute;
top: 20; left: 26;"></div> <div id="holder12" class="holder"
style="position: absolute; top: 20; left: 50;"></div> <div
id="holder13" class="holder" style="position: absolute; top: 20; left:
74;"></div> <div id="holder14" class="holder" style="position: absolute;
top: 44; left: 2;"></div> <div id="holder15" class="holder"
style="position: absolute; top: 44; left: 26;"></div> <div
id="holder16" class="holder" style="position: absolute; top: 44; left:
50;"></div> <div id="holder17" class="holder" style="position: absolute;
top: 44; left: 74;"></div> <div id="holder18" class="holder"
style="position: absolute; top: 68; left: 2;"></div> <div
id="holder19" class="holder" style="position: absolute; top: 68; left:
26;"></div> <div id="holder20" class="holder" style="position: absolute;
top: 68; left: 50;"></div> <div id="holder21" class="holder"
style="position: absolute; top: 68; left: 74;"></div> <div
id="holder22" class="holder" style="position: absolute; top: 92; left:
2;"></div> <div id="holder23" class="holder" style="position: absolute;
top: 92; left: 26;"></div> <div id="holder24" class="holder"
style="position: absolute; top: 92; left: 50;"></div> <div
id="holder25" class="holder" style="position: absolute; top: 92; left:
74;"></div> <div id="holder50" class="holder" style="position: absolute;
top: 20; left: 100;"></div> <div id="holder51" class="holder"
style="position: absolute; top: 20; left: 124;"></div> <div
id="holder52" class="holder" style="position: absolute; top: 20; left:
148;"></div> <div id="holder53" class="holder" style="position:
absolute; top: 20; left: 172;"></div> <div id="holder54"
class="holder" style="position: absolute; top: 44; left:
100;"></div> <div id="holder55" class="holder" style="position:
absolute; top: 44; left: 124;"></div> <div id="holder56"
class="holder" style="position: absolute; top: 44; left:
148;"></div> <div id="holder57" class="holder" style="position:
absolute; top: 44; left: 172;"></div> <div id="holder58"
class="holder" style="position: absolute; top: 68; left:
100;"></div> <div id="holder59" class="holder" style="position:
absolute; top: 68; left: 124;"></div> <div id="holder60"
class="holder" style="position: absolute; top: 68; left:
148;"></div> <div id="holder61" class="holder" style="position:

```

```

absolute; top: 68; left: 172;"></div> <div id="holder62"
class="holder" style="position: absolute; top: 92; left:
100;"></div> <div id="holder63" class="holder" style="position:
absolute; top: 92; left: 124;"></div> <div id="holder64"
class="holder" style="position: absolute; top: 92; left:
148;"></div> <div id="holder65" class="holder" style="position:
absolute; top: 92; left: 172;"></div> <div id="swatch10"
class="swatch" style="position: absolute; top: 26; left: 8;"
title="Black"></div> <div id="swatch11" class="swatch"
style="position: absolute; top: 26; left: 32;"
title="Silver"></div> <div id="swatch12" class="swatch"
style="position: absolute; top: 26; left: 56;"
title="Gray"></div> <div id="swatch13" class="swatch"
style="position: absolute; top: 26; left: 80;"
title="White"></div> <div id="swatch14" class="swatch"
style="position: absolute; top: 50; left: 8;"
title="Maroon"></div> <div id="swatch15" class="swatch"
style="position: absolute; top: 50; left: 32;" title="Red"></div> <div
id="swatch16" class="swatch" style="position: absolute; top: 50; left:
56;" title="Purple"></div> <div id="swatch17" class="swatch"
style="position: absolute; top: 50; left: 80;"
title="Fuchsia"></div> <div id="swatch18" class="swatch"
style="position: absolute; top: 74; left: 8;"
title="Green"></div> <div id="swatch19" class="swatch"
style="position: absolute; top: 74; left: 32;"
title="Lime"></div> <div id="swatch20" class="swatch"
style="position: absolute; top: 74; left: 56;"
title="Olive"></div> <div id="swatch21" class="swatch"
style="position: absolute; top: 74; left: 80;"
title="Yellow"></div> <div id="swatch22" class="swatch"
style="position: absolute; top: 98; left: 8;"
title="Navy"></div> <div id="swatch23" class="swatch"
style="position: absolute; top: 98; left: 32;"
title="Blue"></div> <div id="swatch24" class="swatch"
style="position: absolute; top: 98; left: 56;"
title="Teal"></div> <div id="swatch25" class="swatch"
style="position: absolute; top: 98; left: 80;"
title="Aqua"></div> <div id="swatch50" class="swatch"
style="position: absolute; top: 26; left: 106;"
title="Black"></div> <div id="swatch51" class="swatch"
style="position: absolute; top: 26; left: 130;"
title="Silver"></div> <div id="swatch52" class="swatch"
style="position: absolute; top: 26; left: 154;"
title="Gray"></div> <div id="swatch53" class="swatch"
style="position: absolute; top: 26; left: 178;"
title="White"></div> <div id="swatch54" class="swatch"
style="position: absolute; top: 50; left: 106;"
title="Maroon"></div> <div id="swatch55" class="swatch"
style="position: absolute; top: 50; left: 130;"
title="Red"></div> <div id="swatch56" class="swatch"
style="position: absolute; top: 50; left: 154;"
title="Purple"></div> <div id="swatch57" class="swatch"
style="position: absolute; top: 50; left: 178;"
title="Fuchsia"></div> <div id="swatch58" class="swatch"
style="position: absolute; top: 74; left: 106;"
title="Green"></div> <div id="swatch59" class="swatch"
style="position: absolute; top: 74; left: 130;"
title="Lime"></div> <div id="swatch60" class="swatch"
style="position: absolute; top: 74; left: 154;"
title="Olive"></div> <div id="swatch61" class="swatch"
style="position: absolute; top: 74; left: 178;"
title="Yellow"></div> <div id="swatch62" class="swatch"
style="position: absolute; top: 98; left: 106;"
title="Navy"></div> <div id="swatch63" class="swatch"
style="position: absolute; top: 98; left: 130;"

```



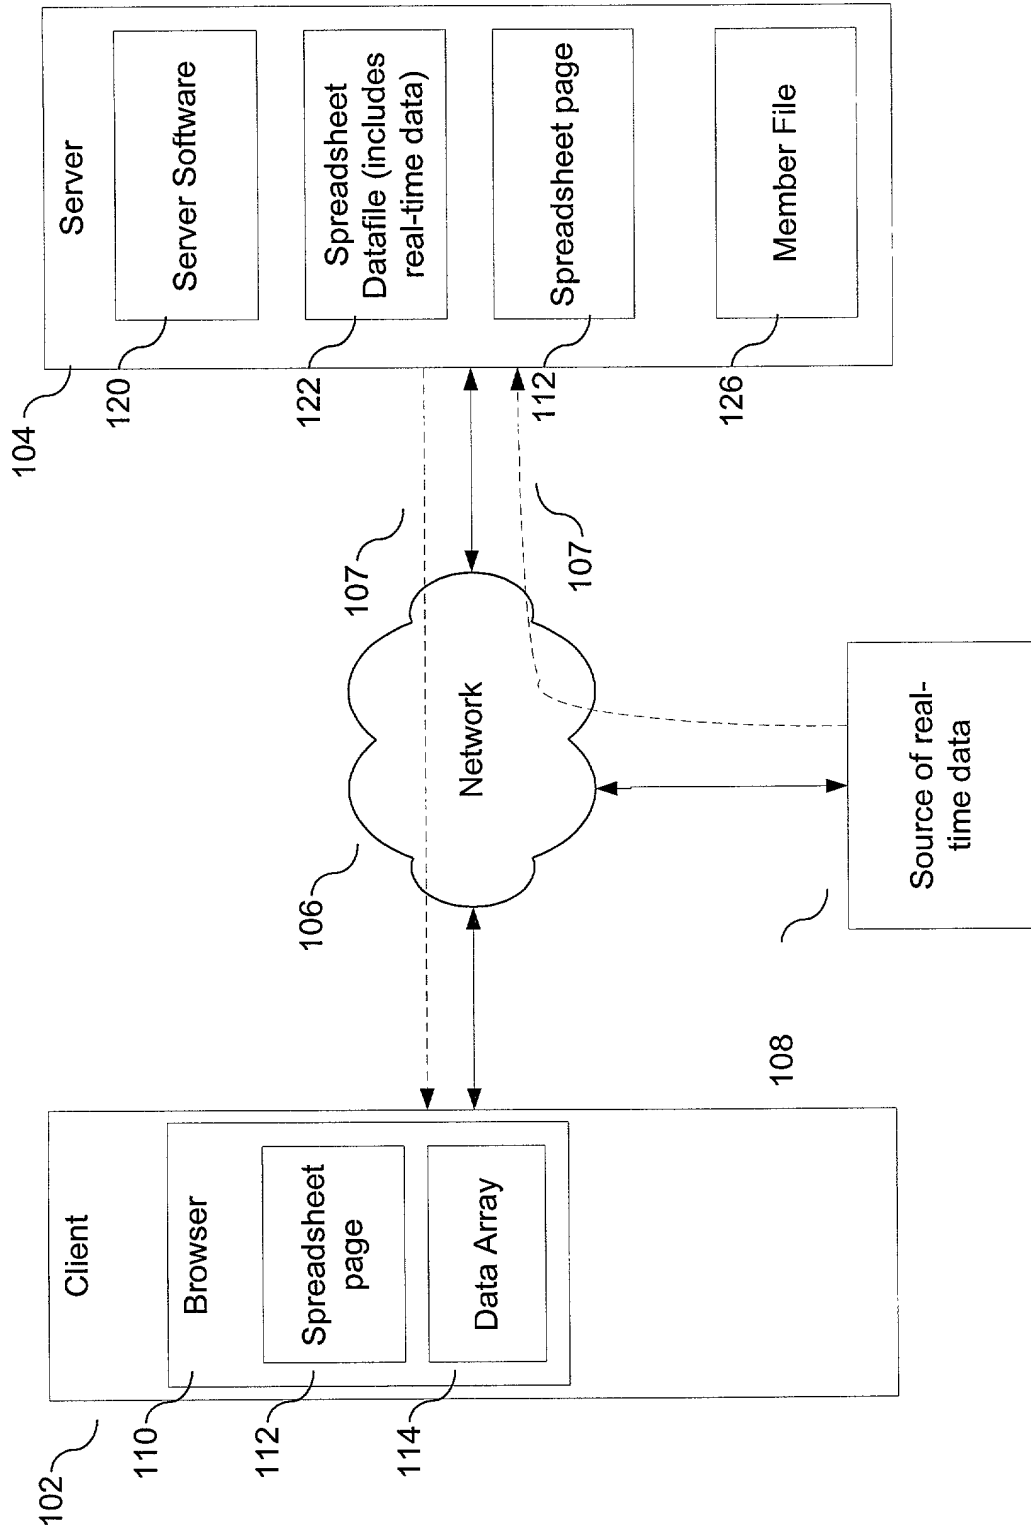


Fig. 1

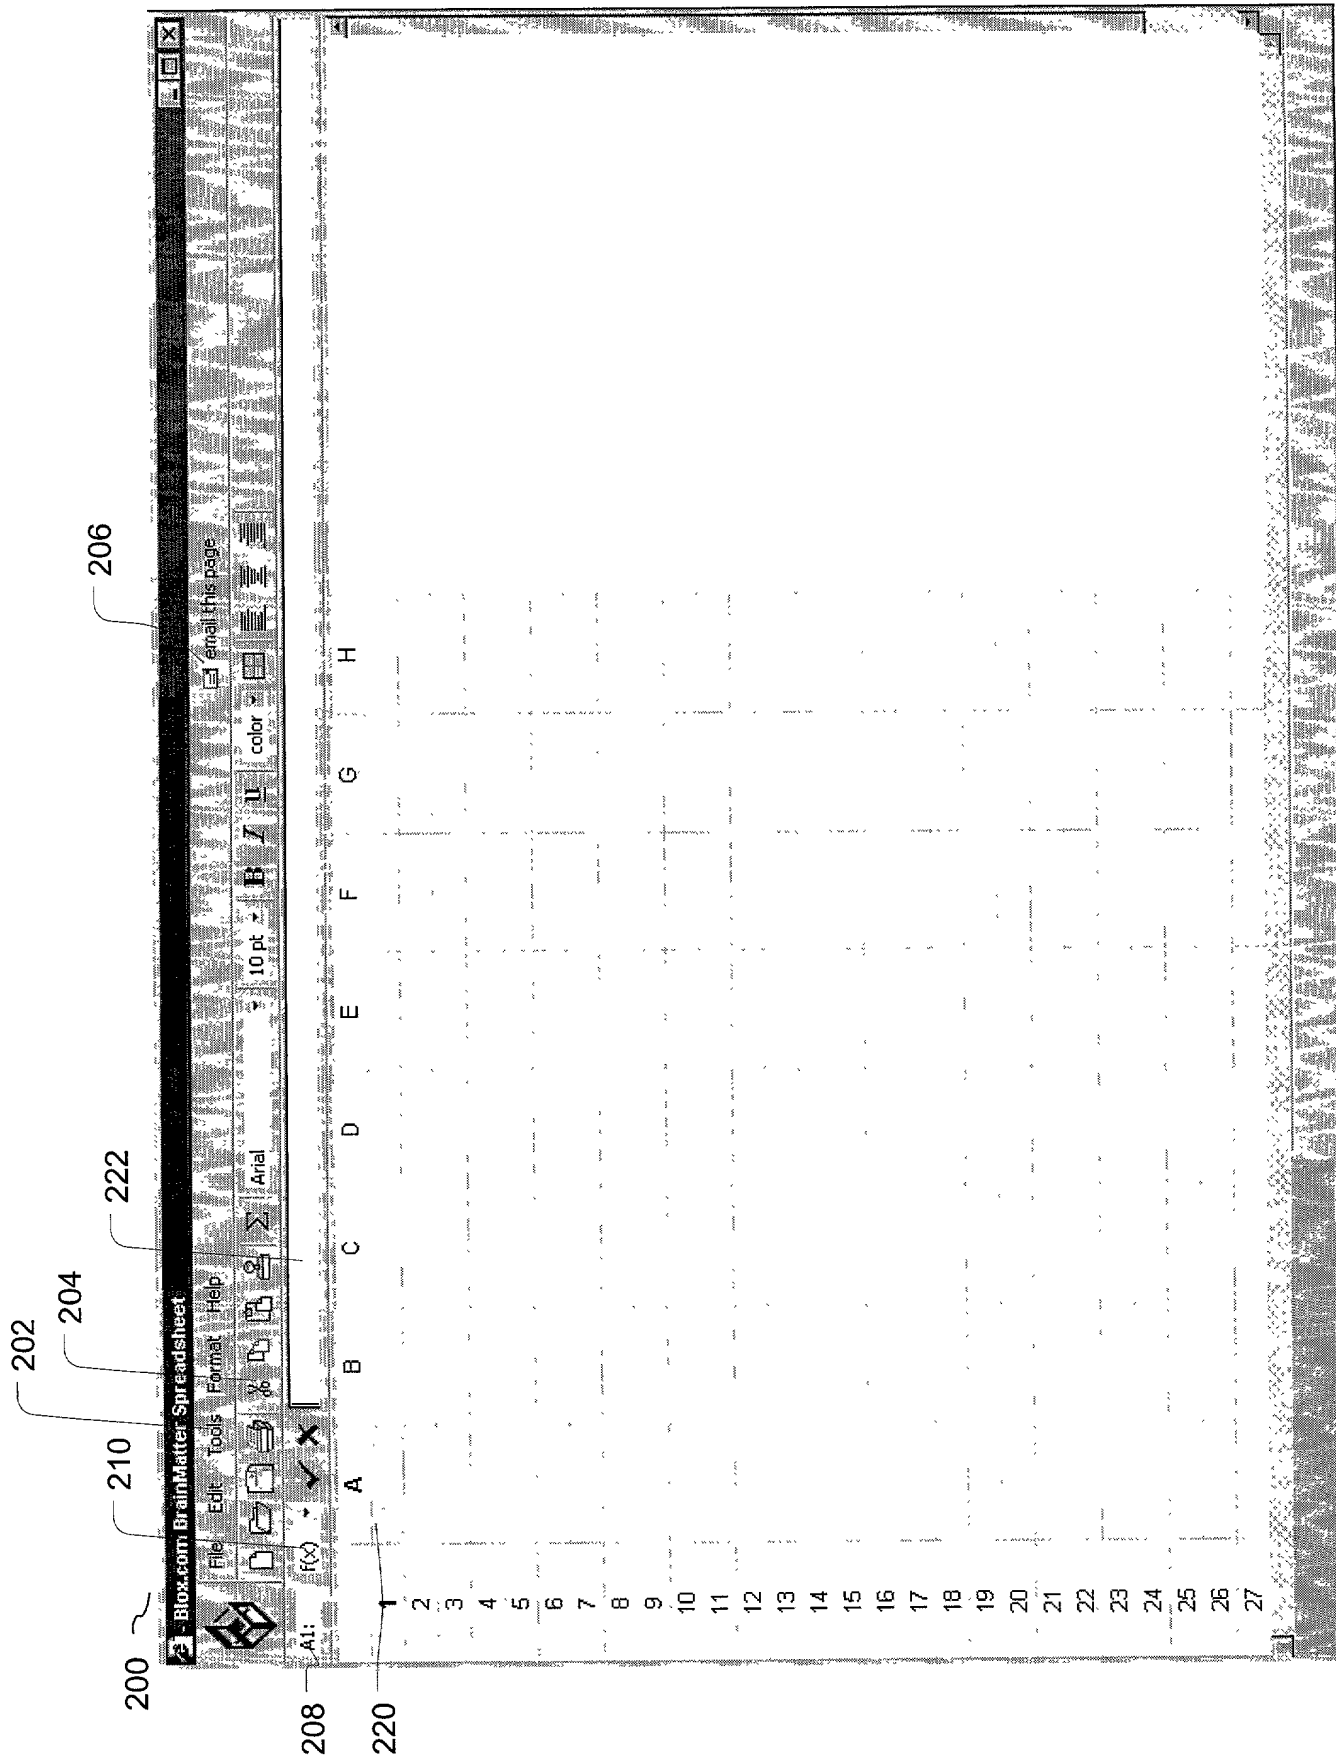


Fig. 2

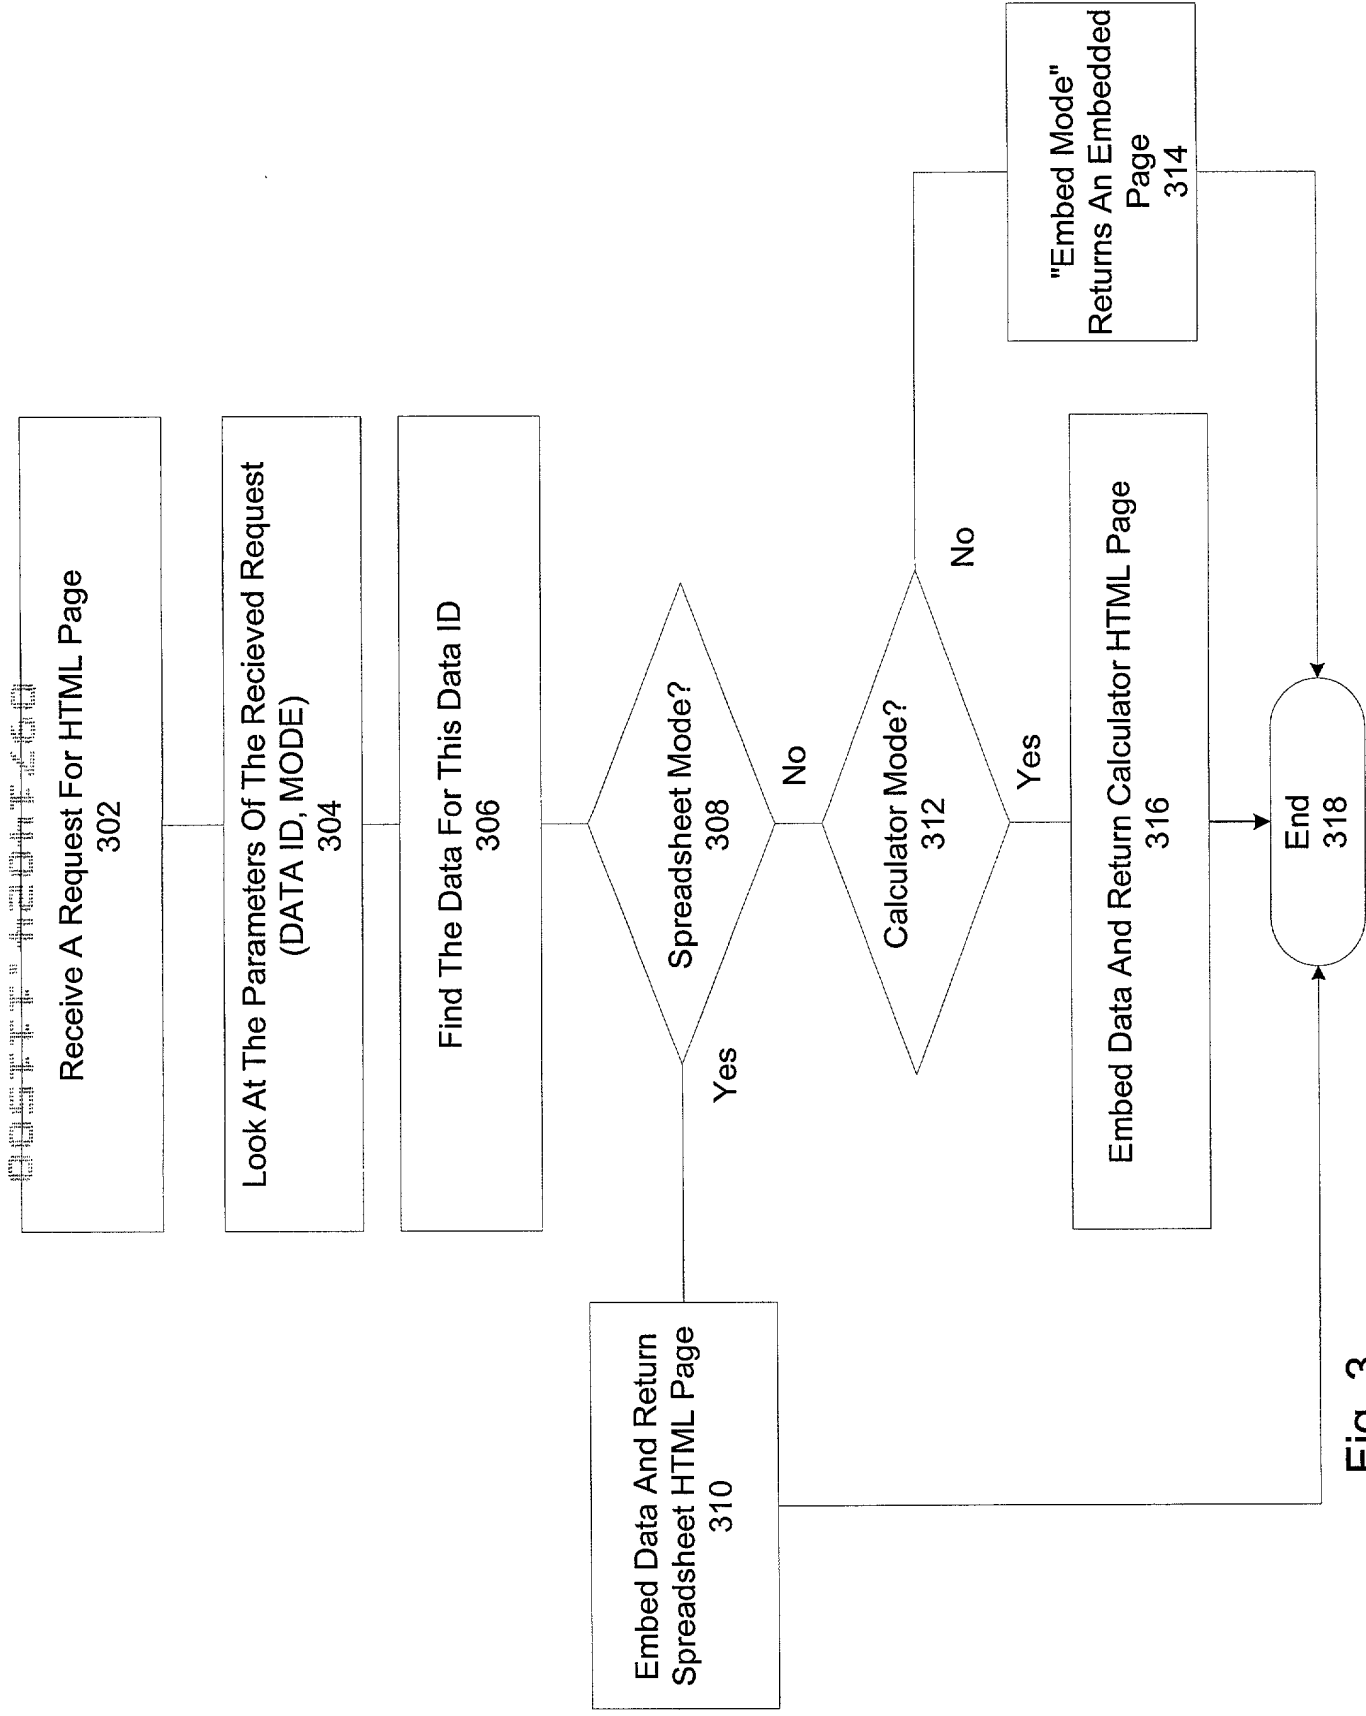


Fig. 3  
Server

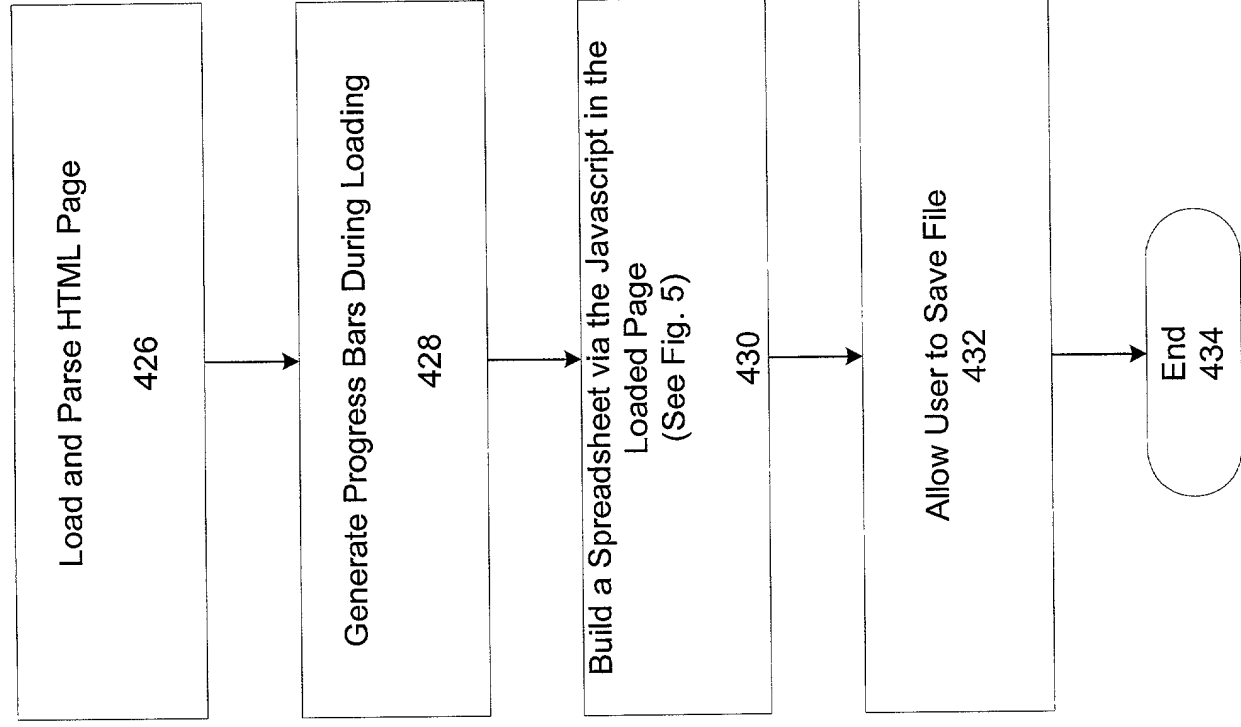


Fig. 4  
Browser



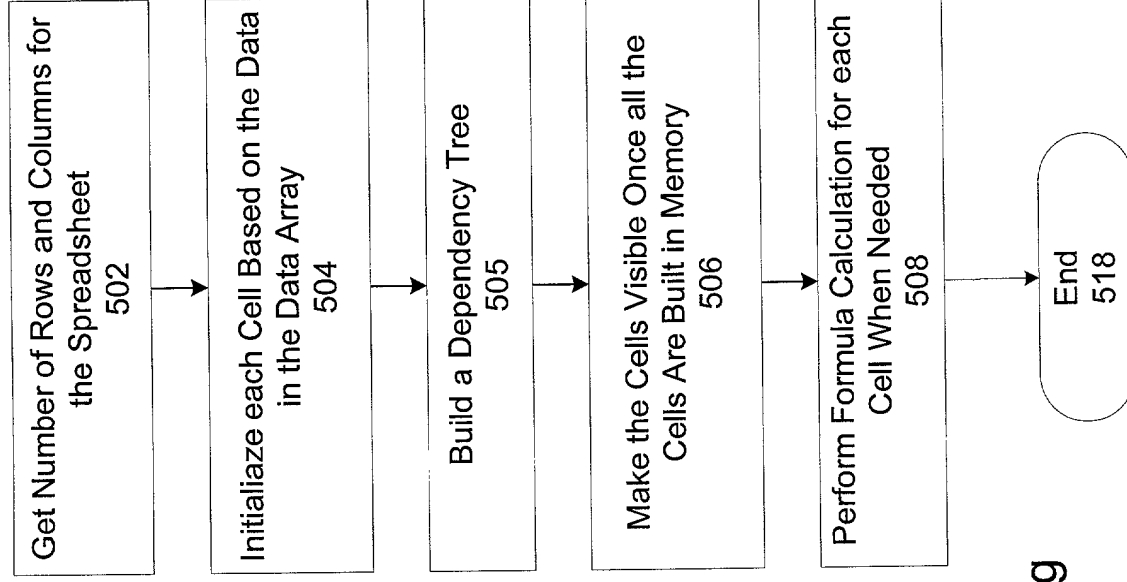


Fig. 5  
Browser, Displaying  
Spreadsheet

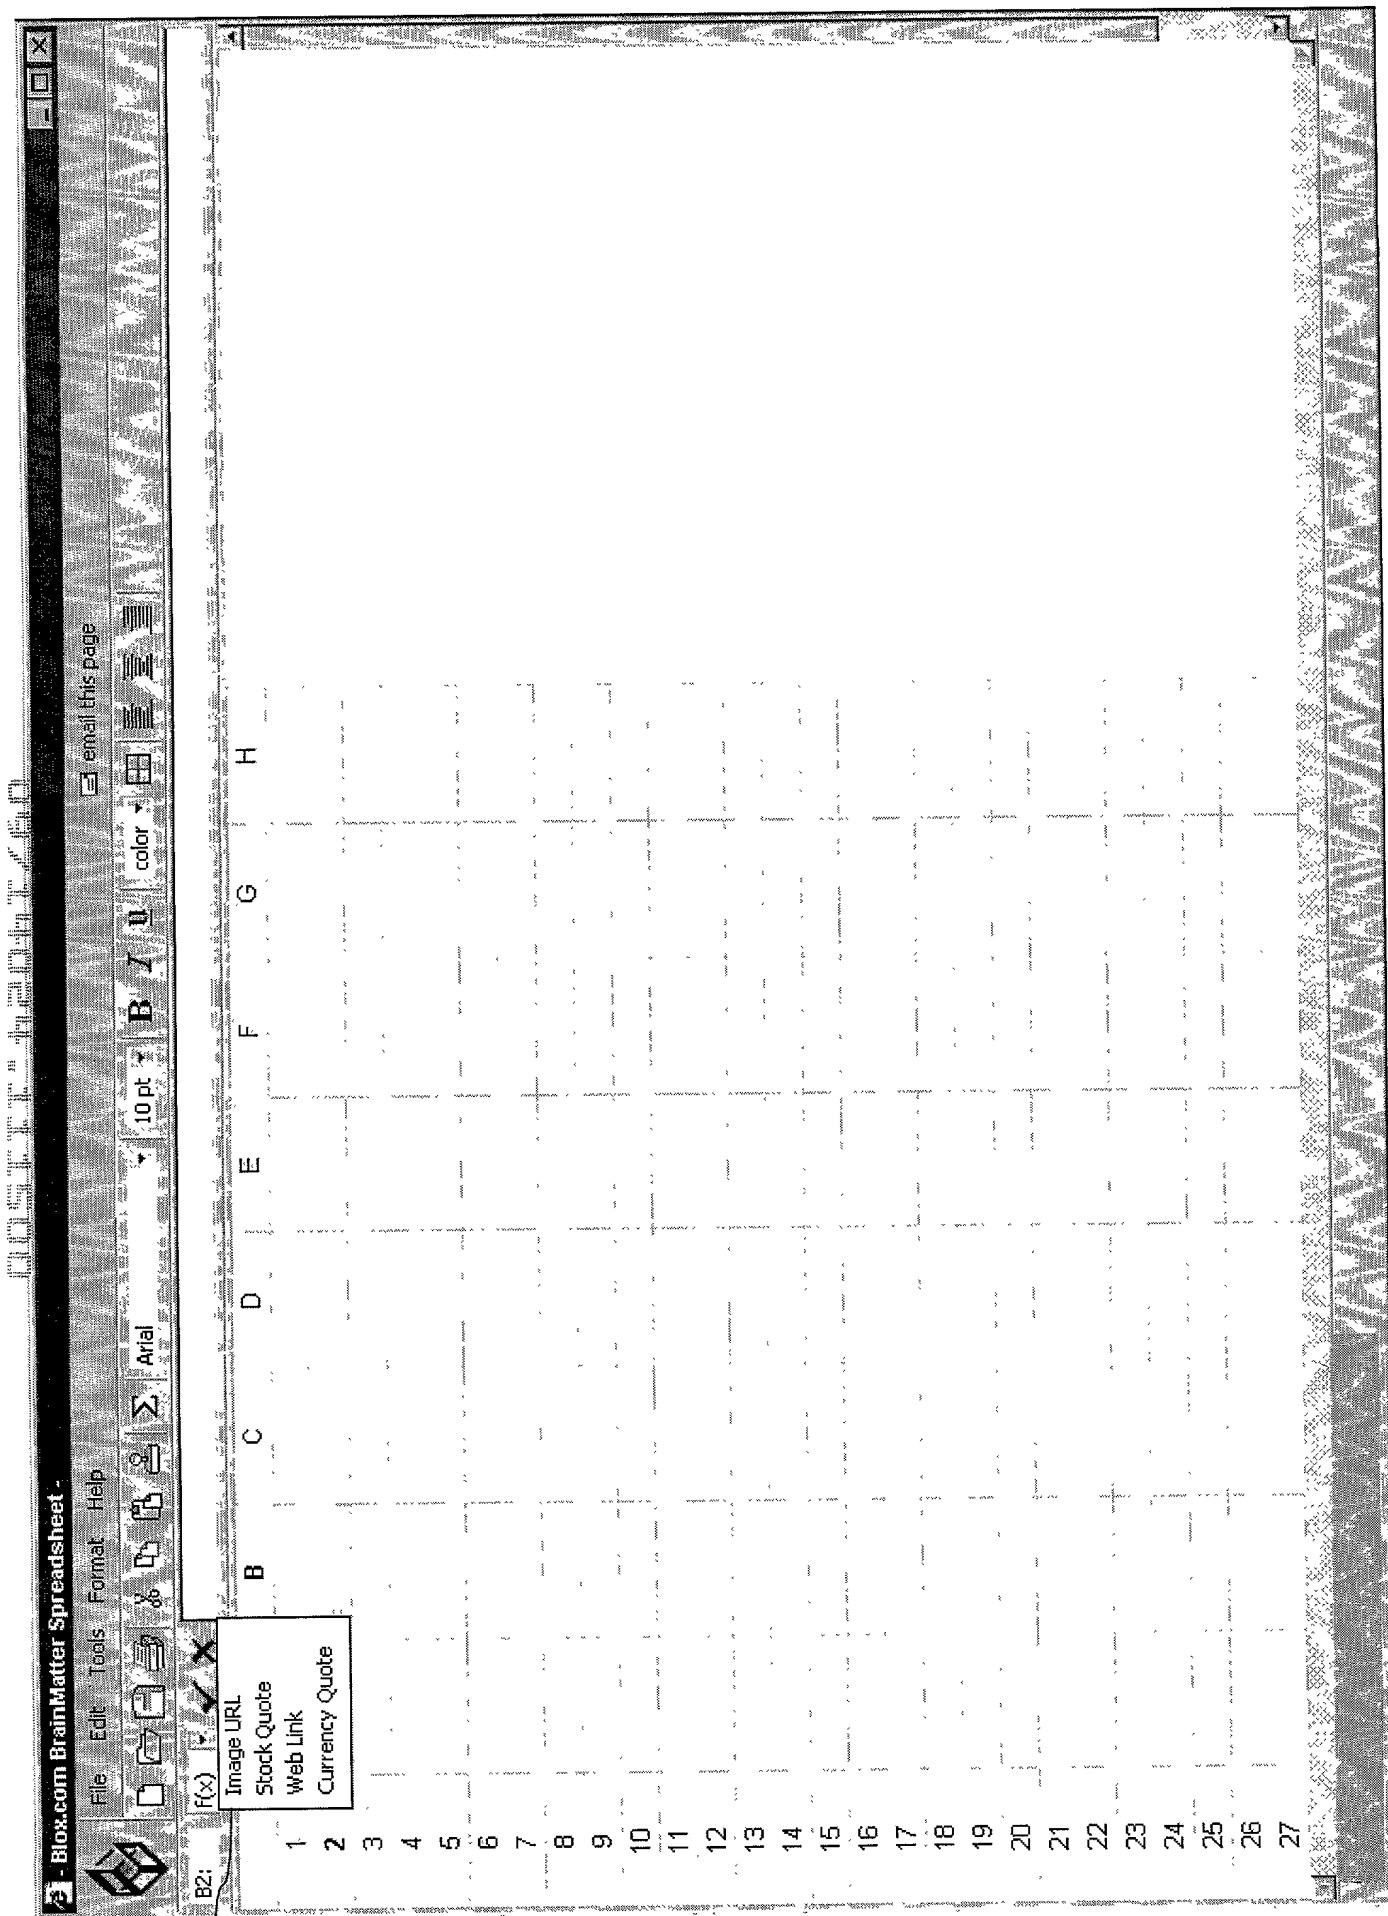


Fig. 6

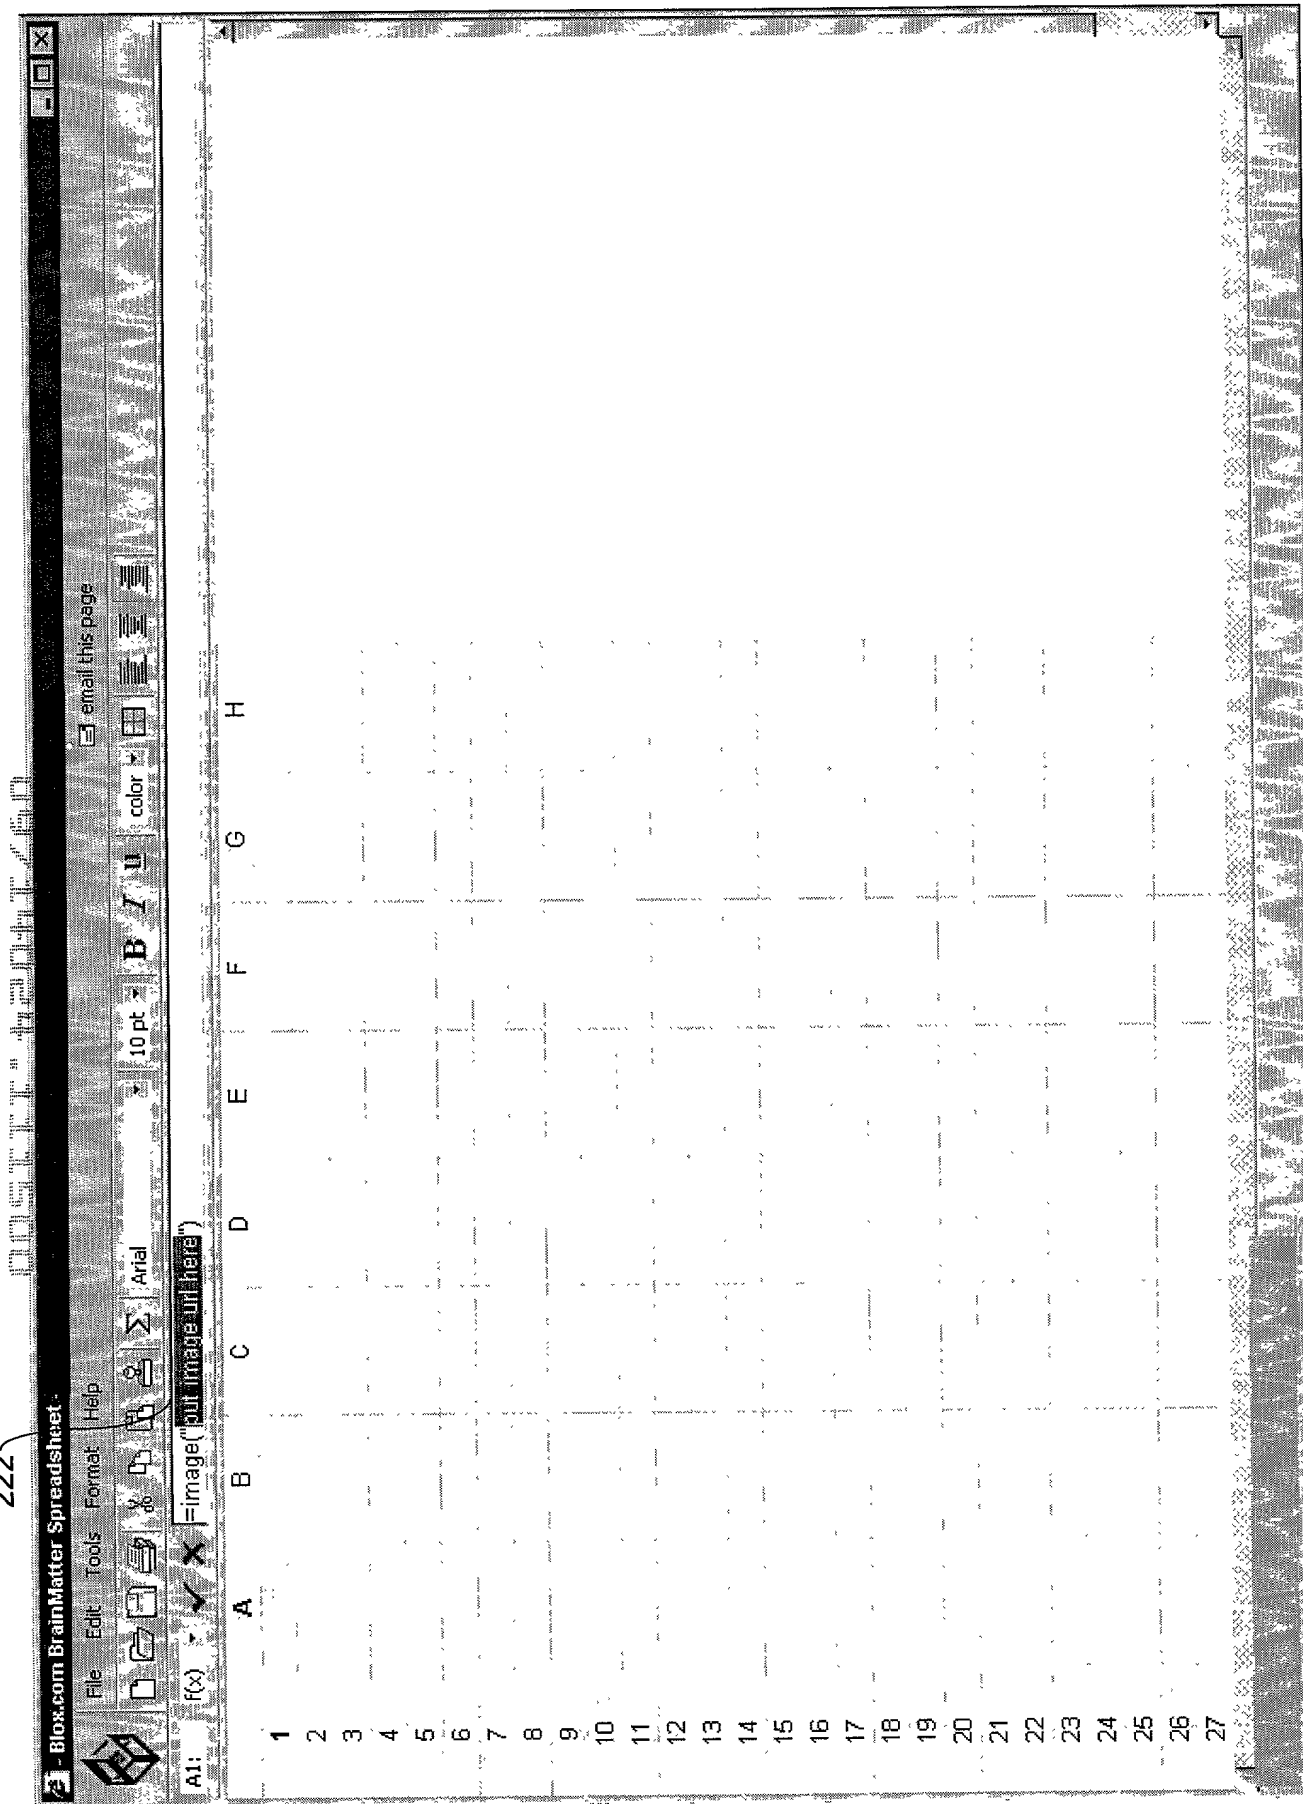


Fig. 7(a)

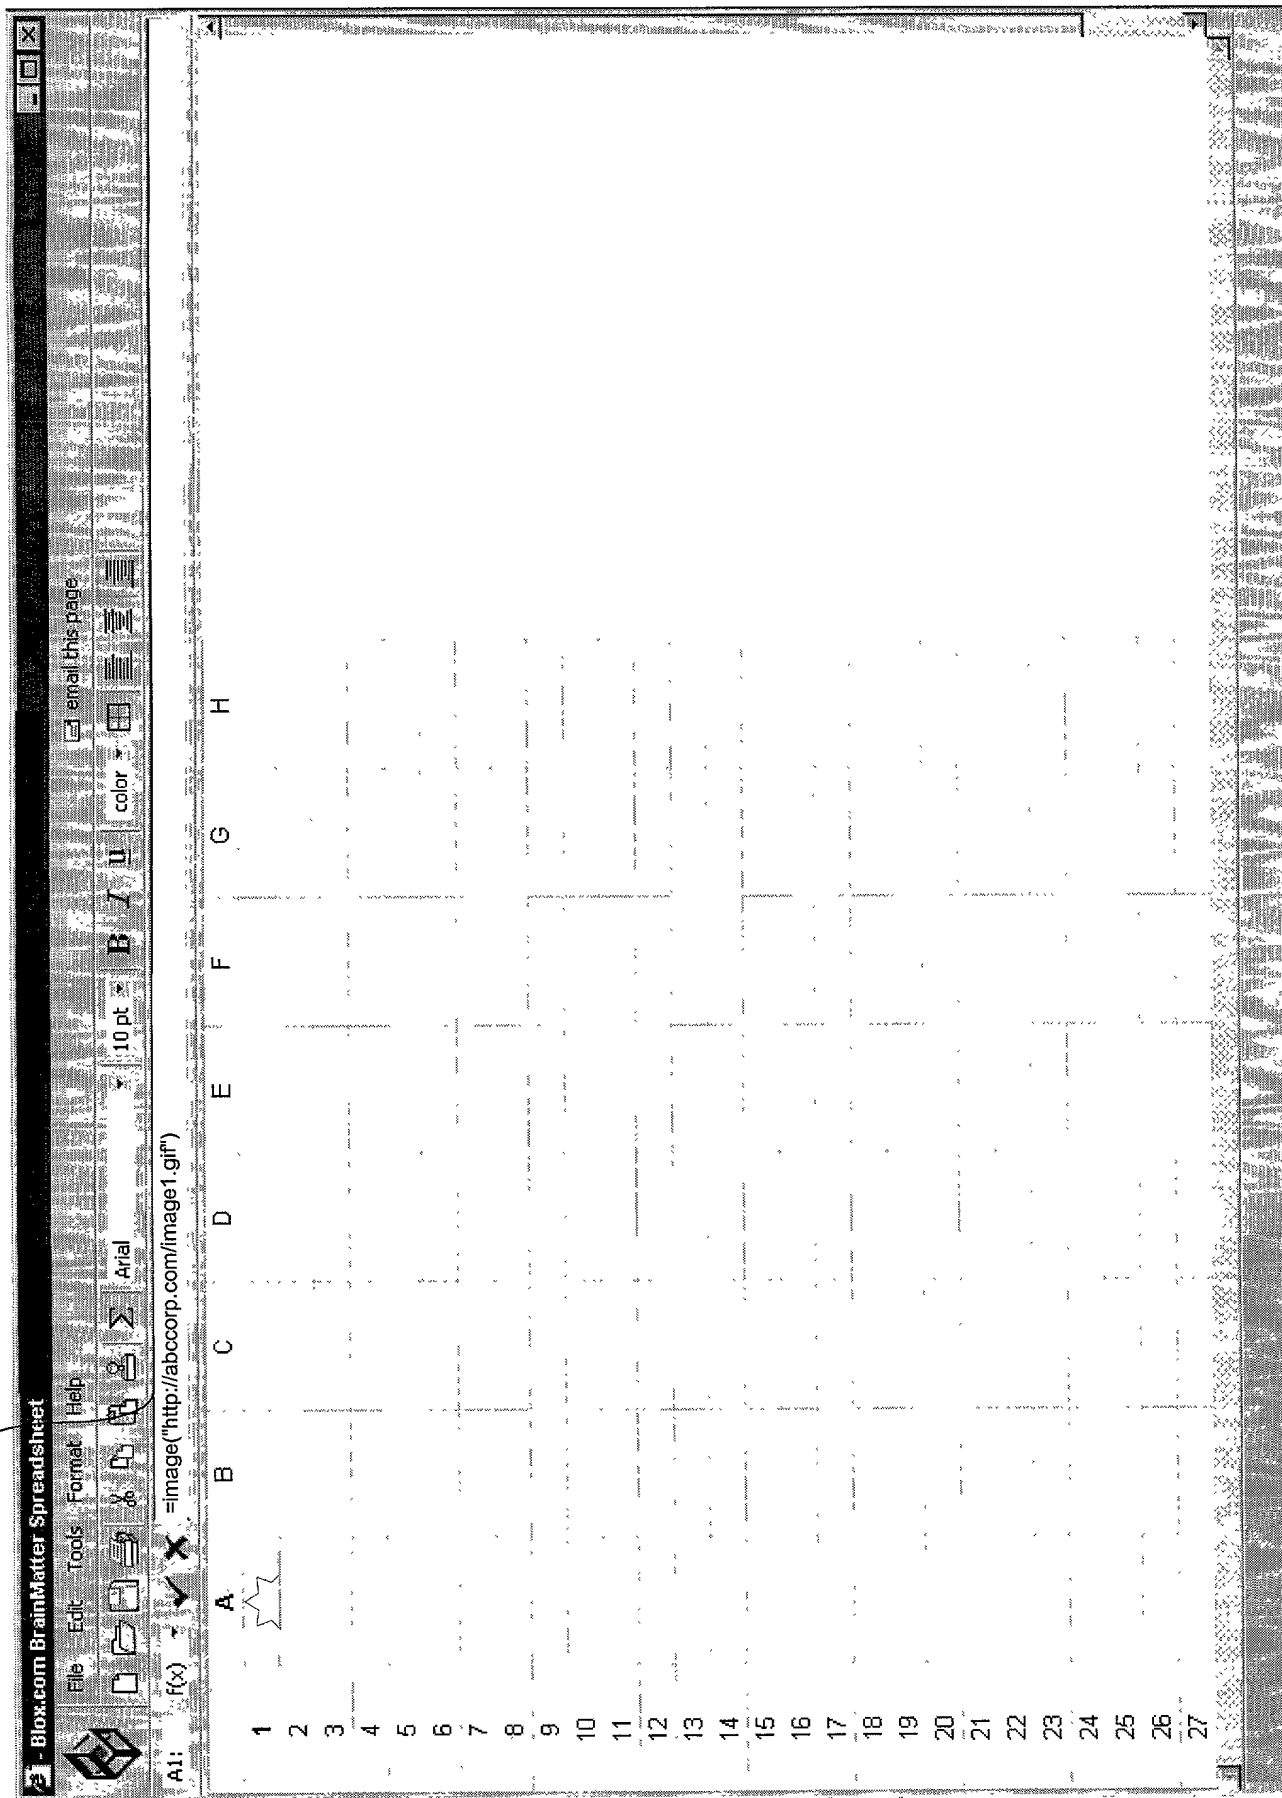


Fig. 7(b)

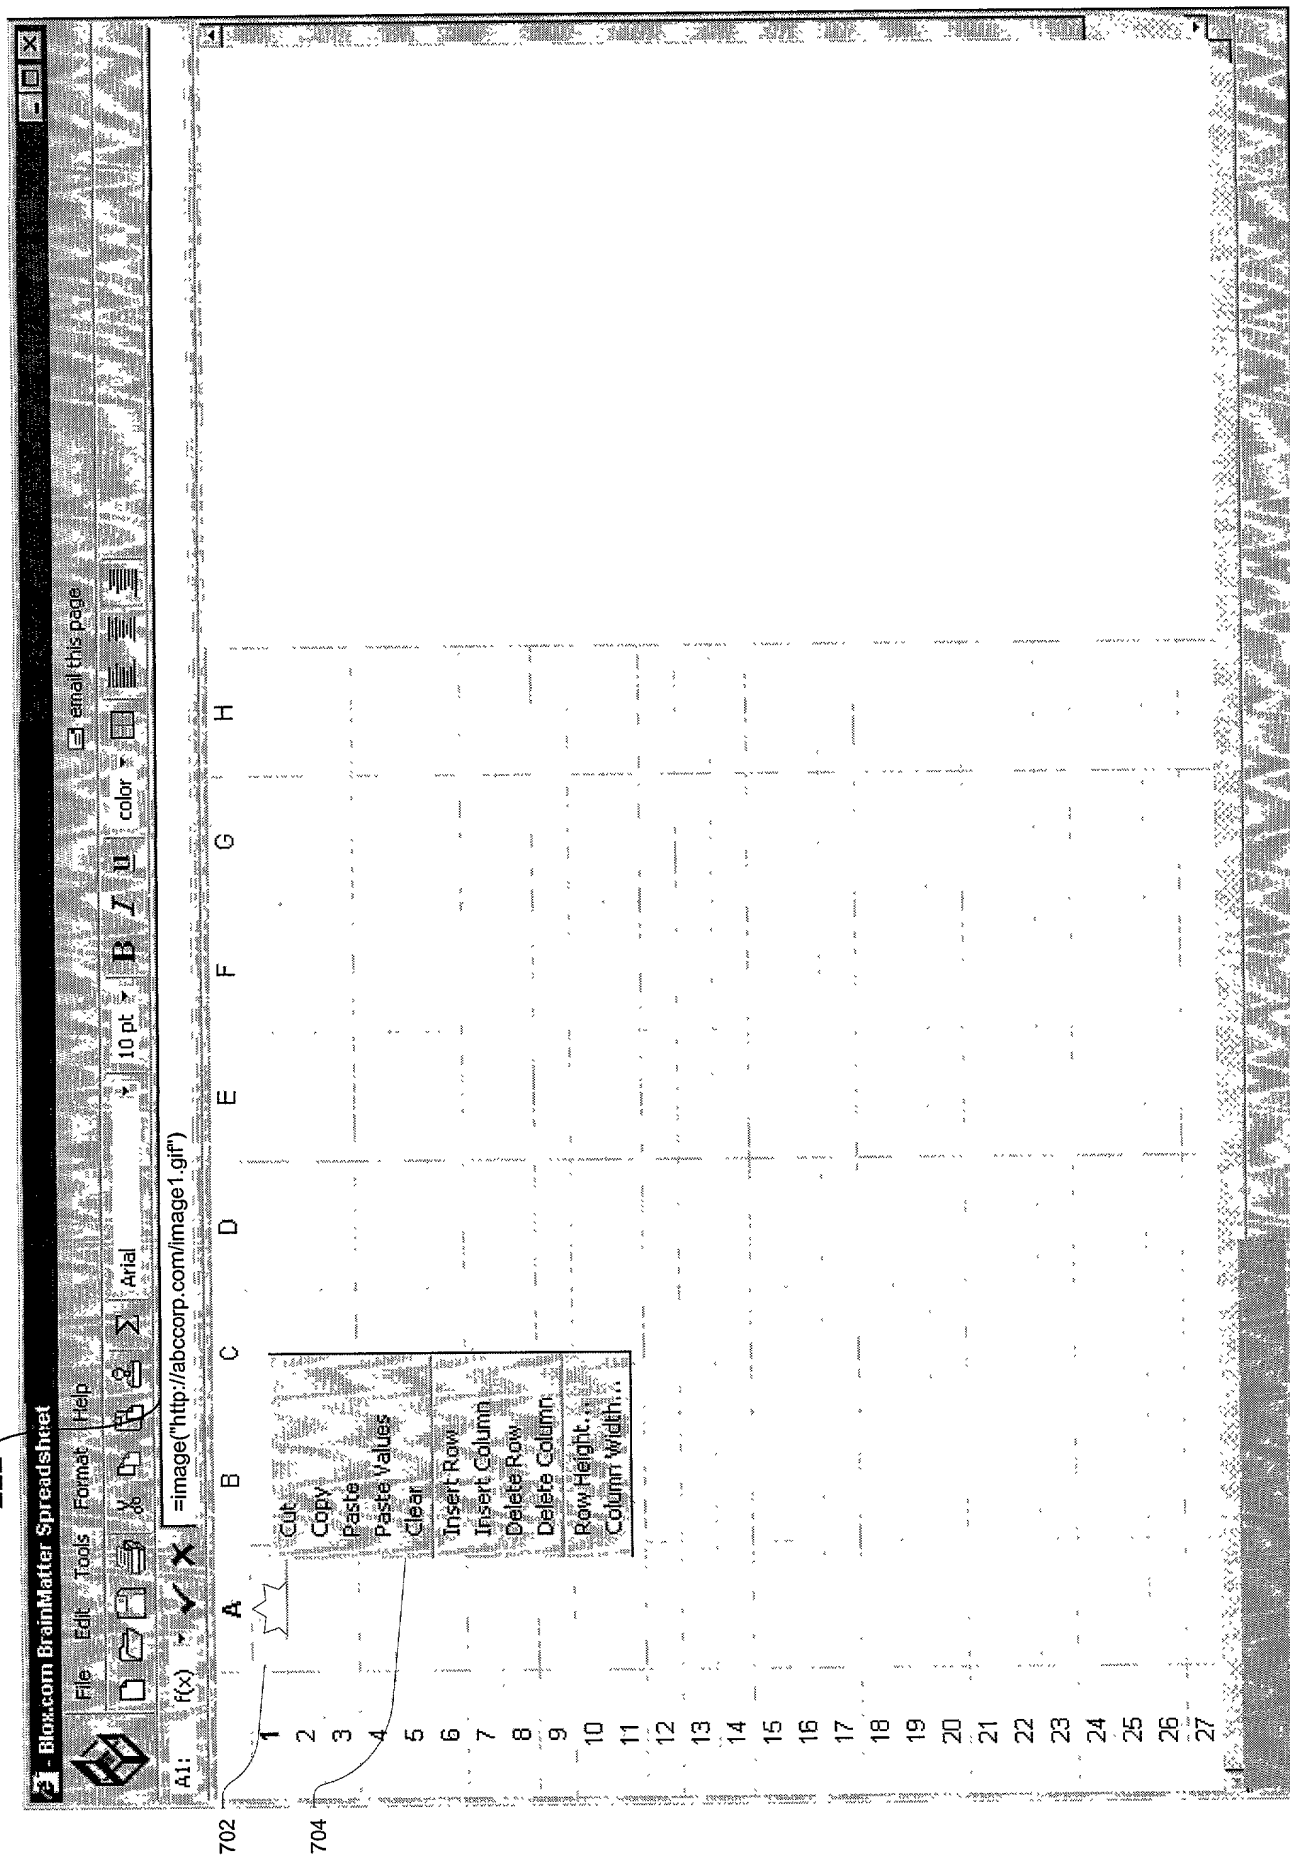


Fig. 7(c)

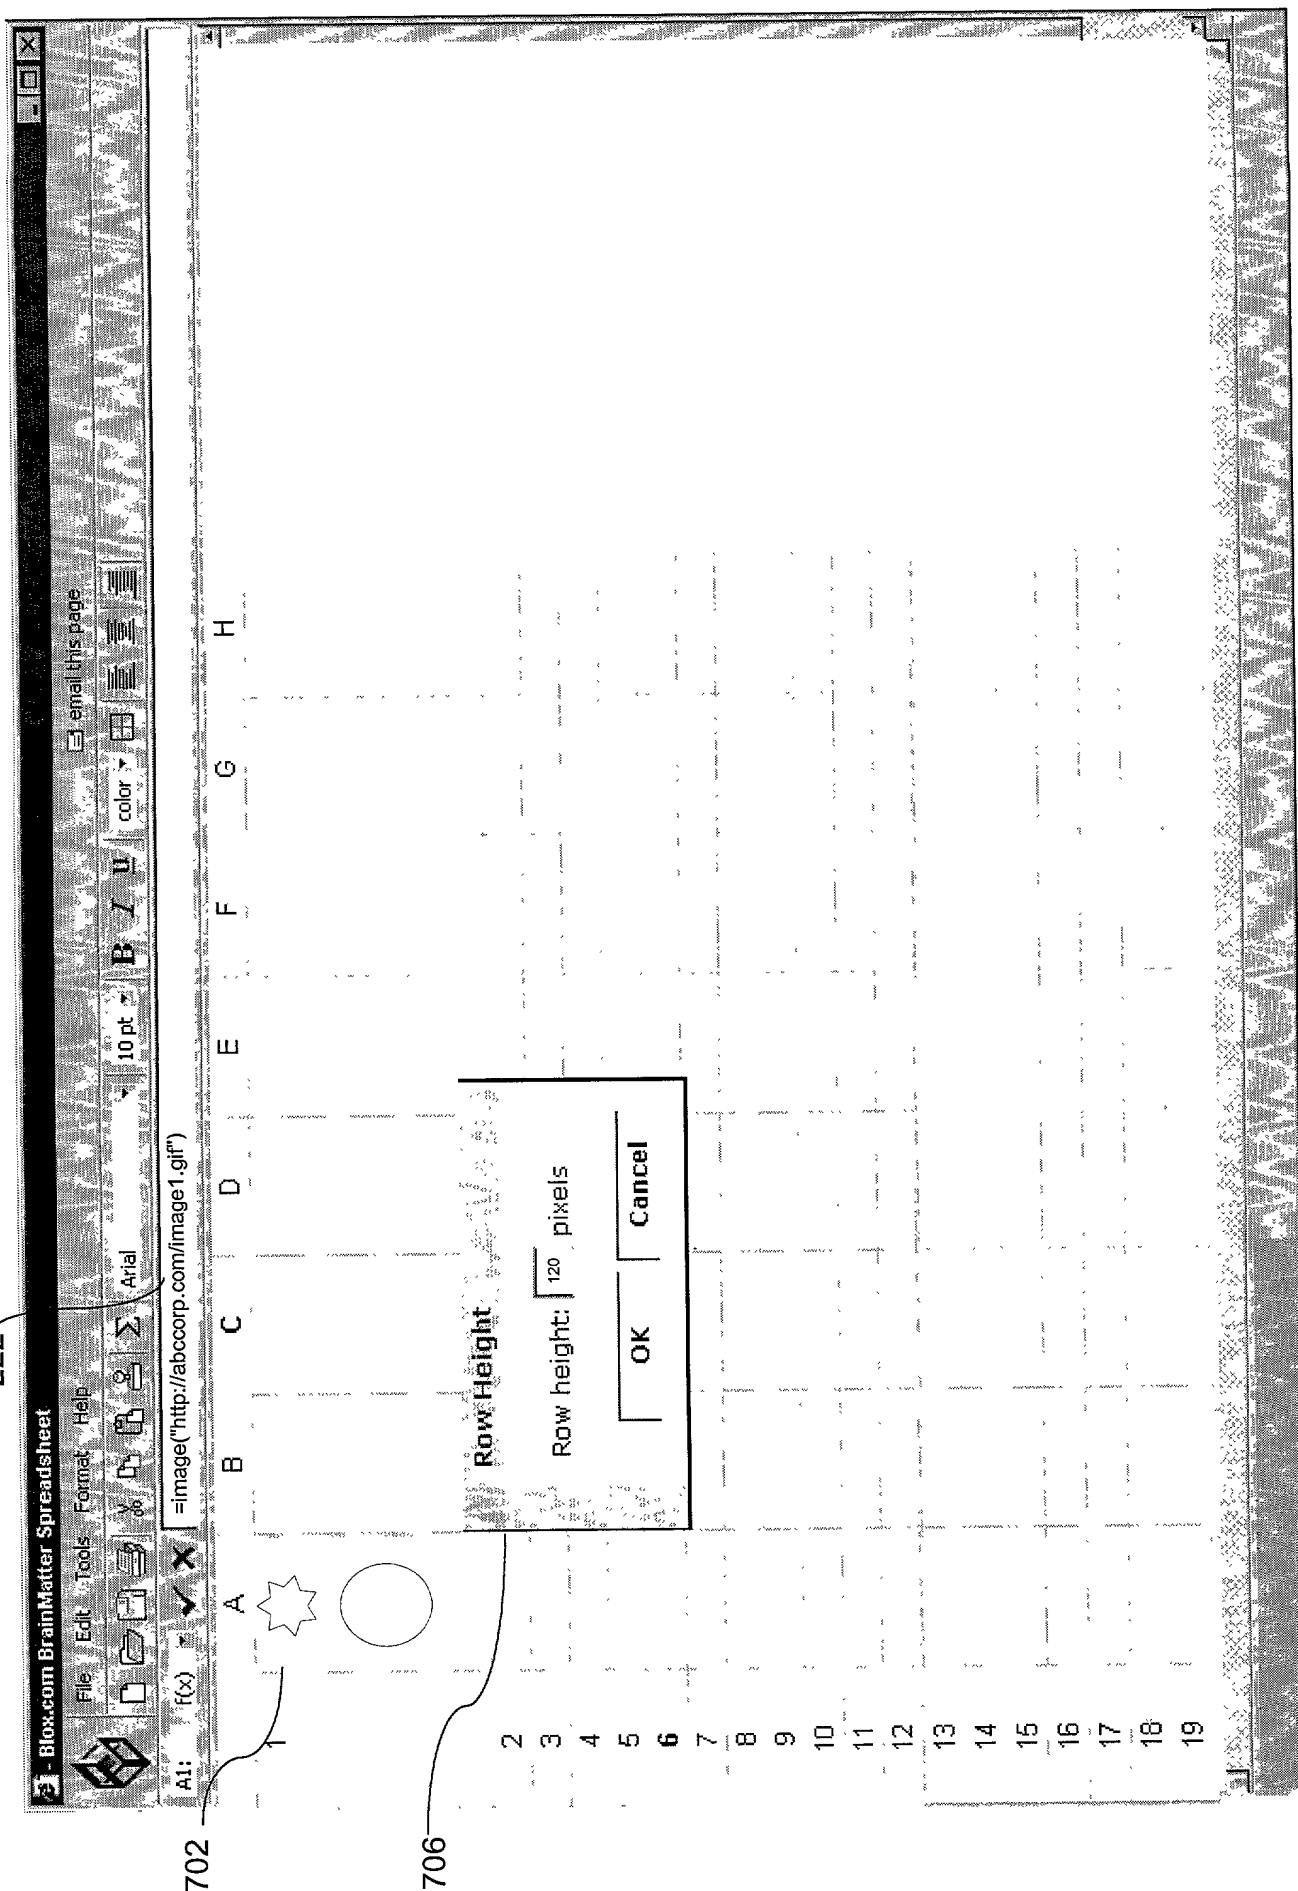


Fig. 7(d)

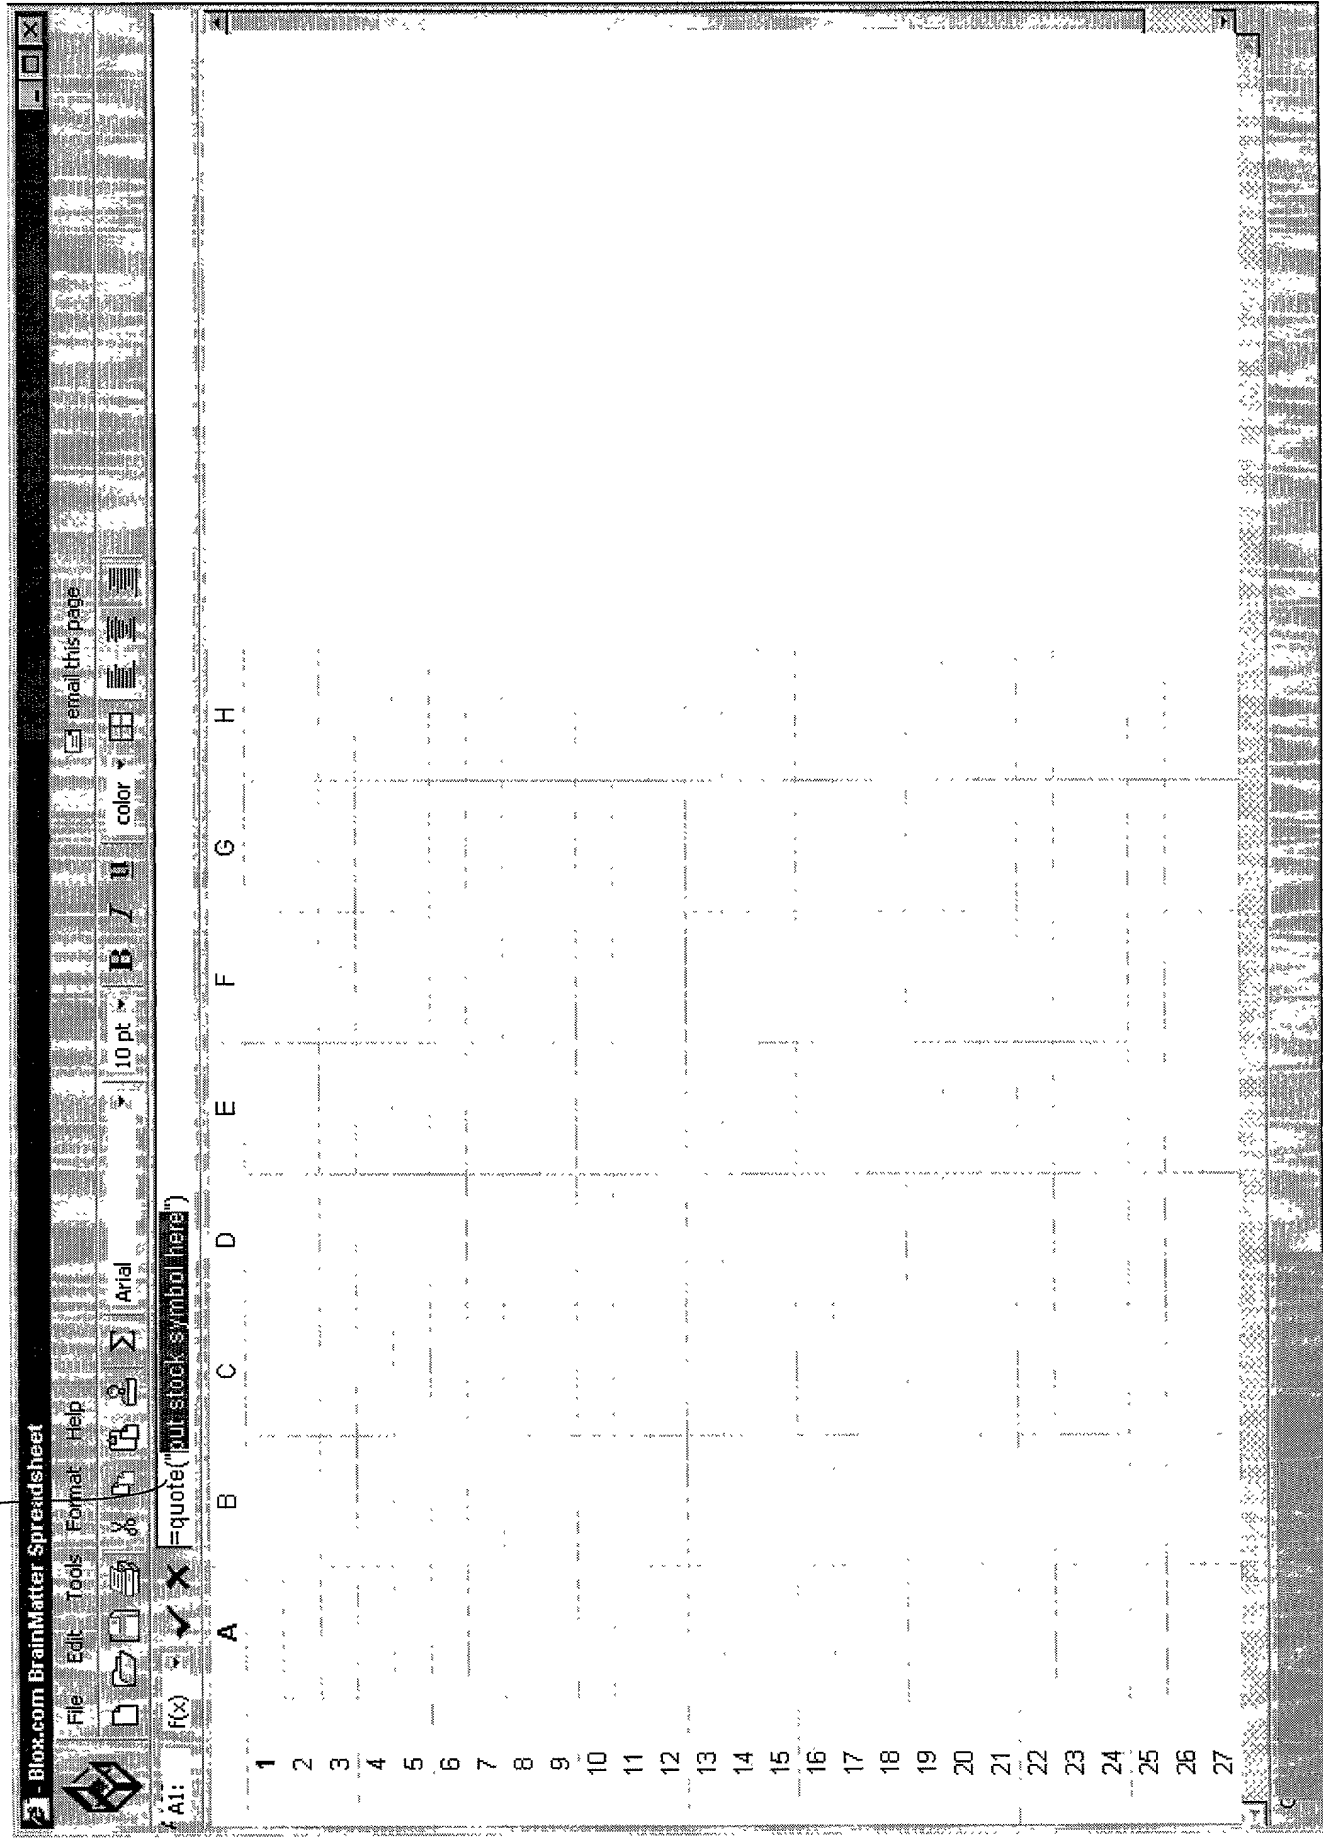


Fig. 8(a)

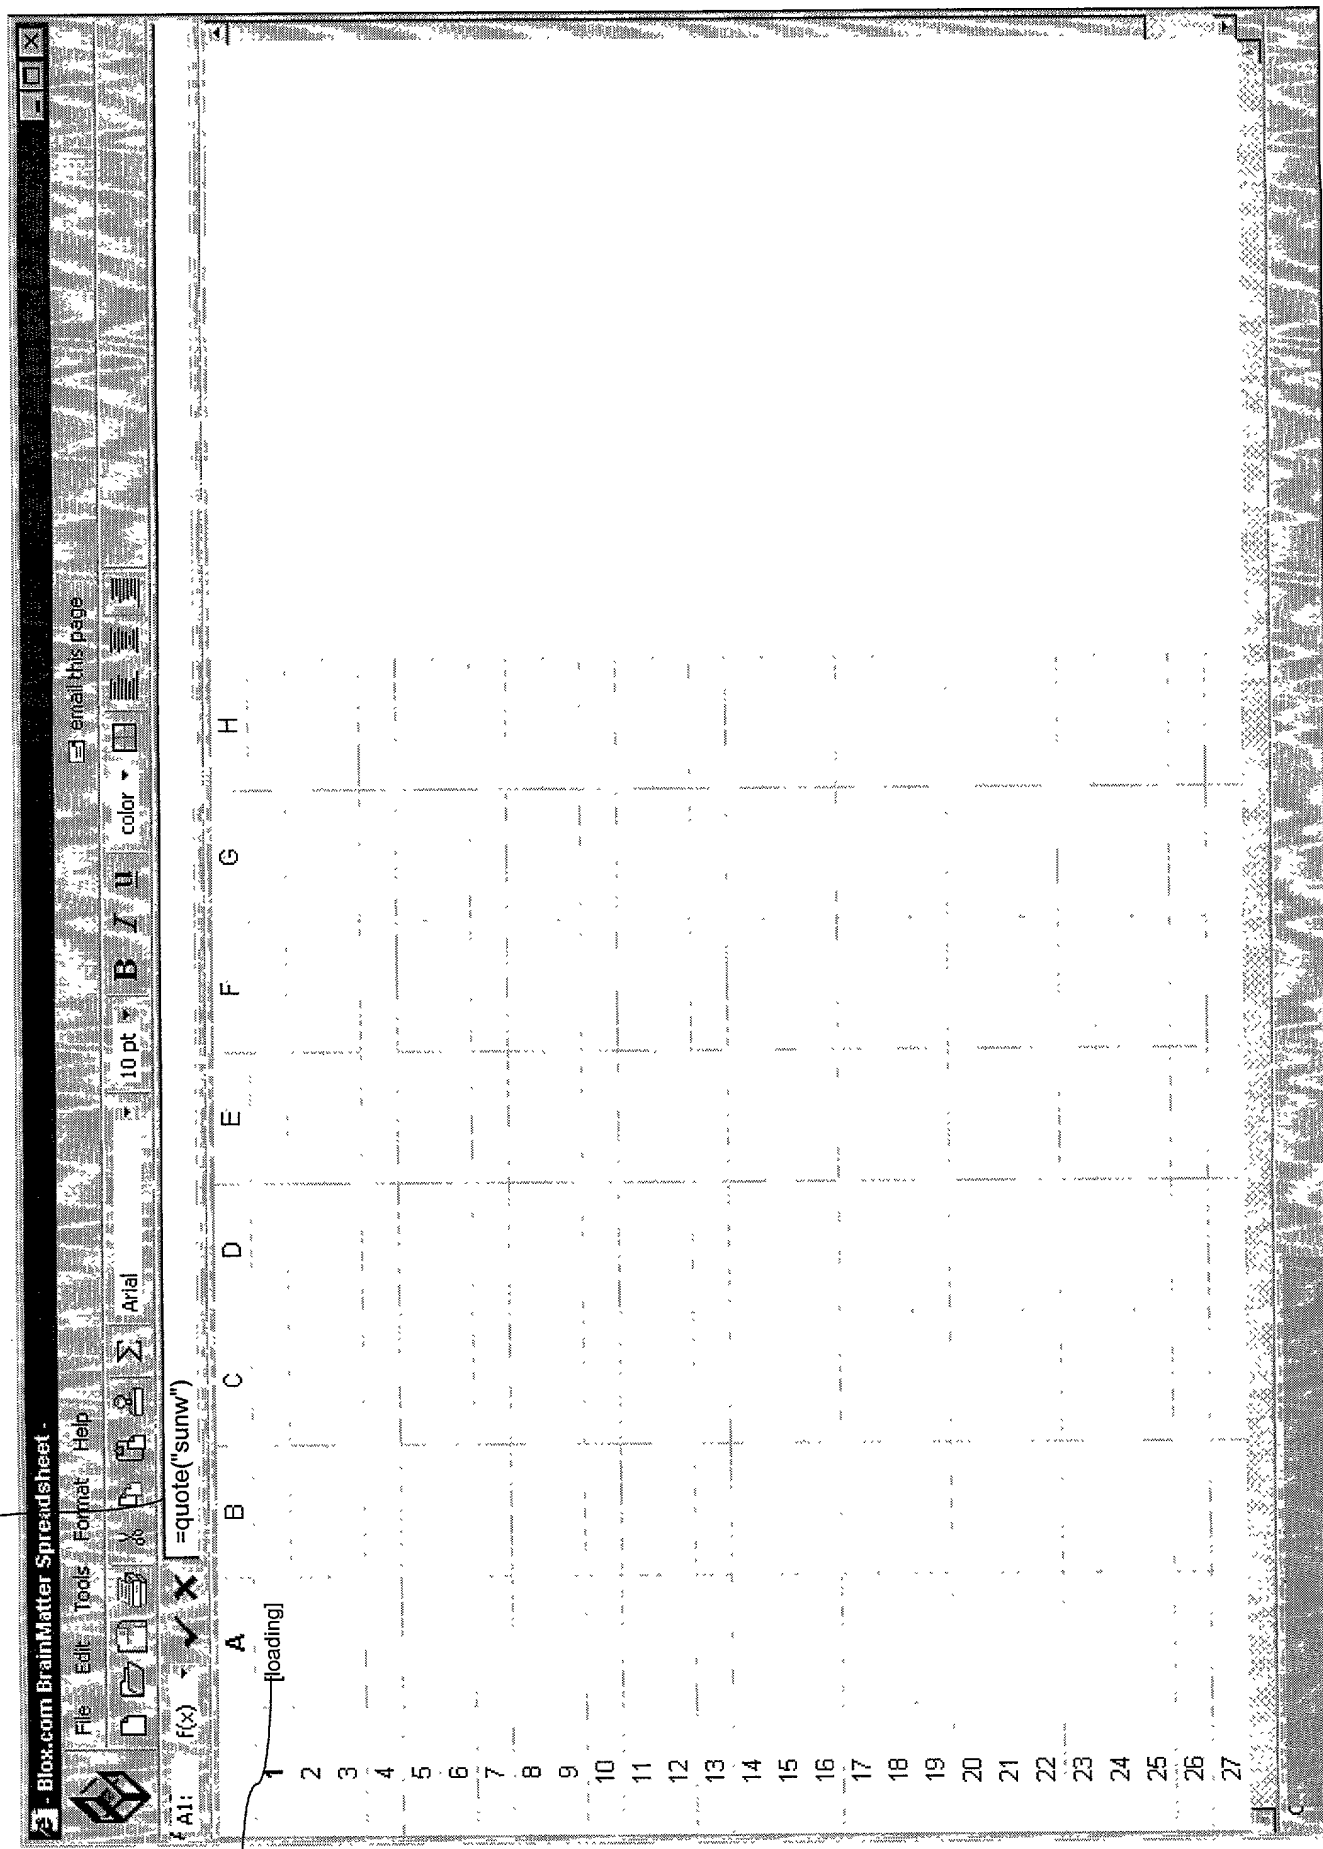


Fig. 8(b)



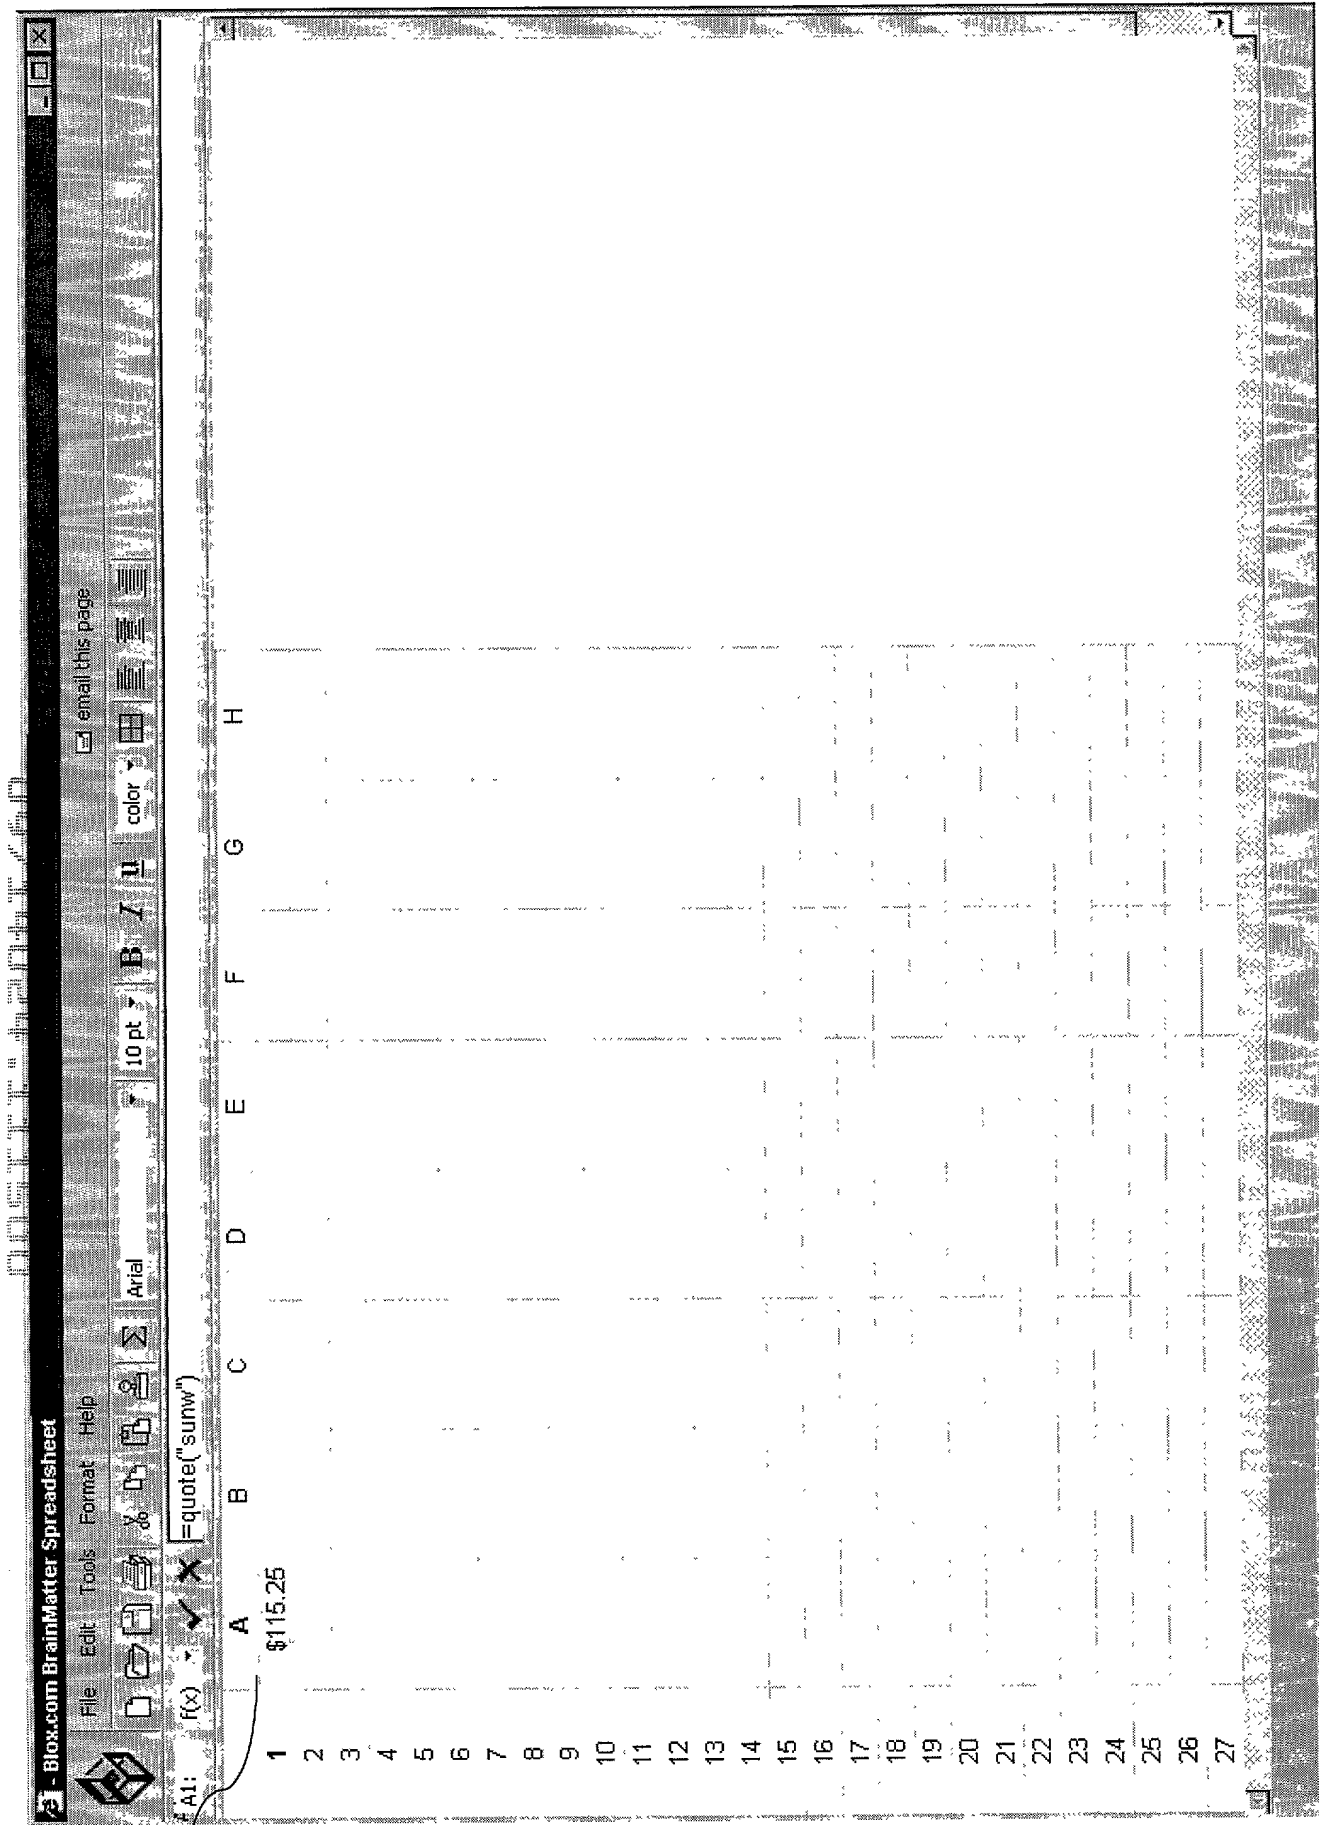


Fig. 8(c)

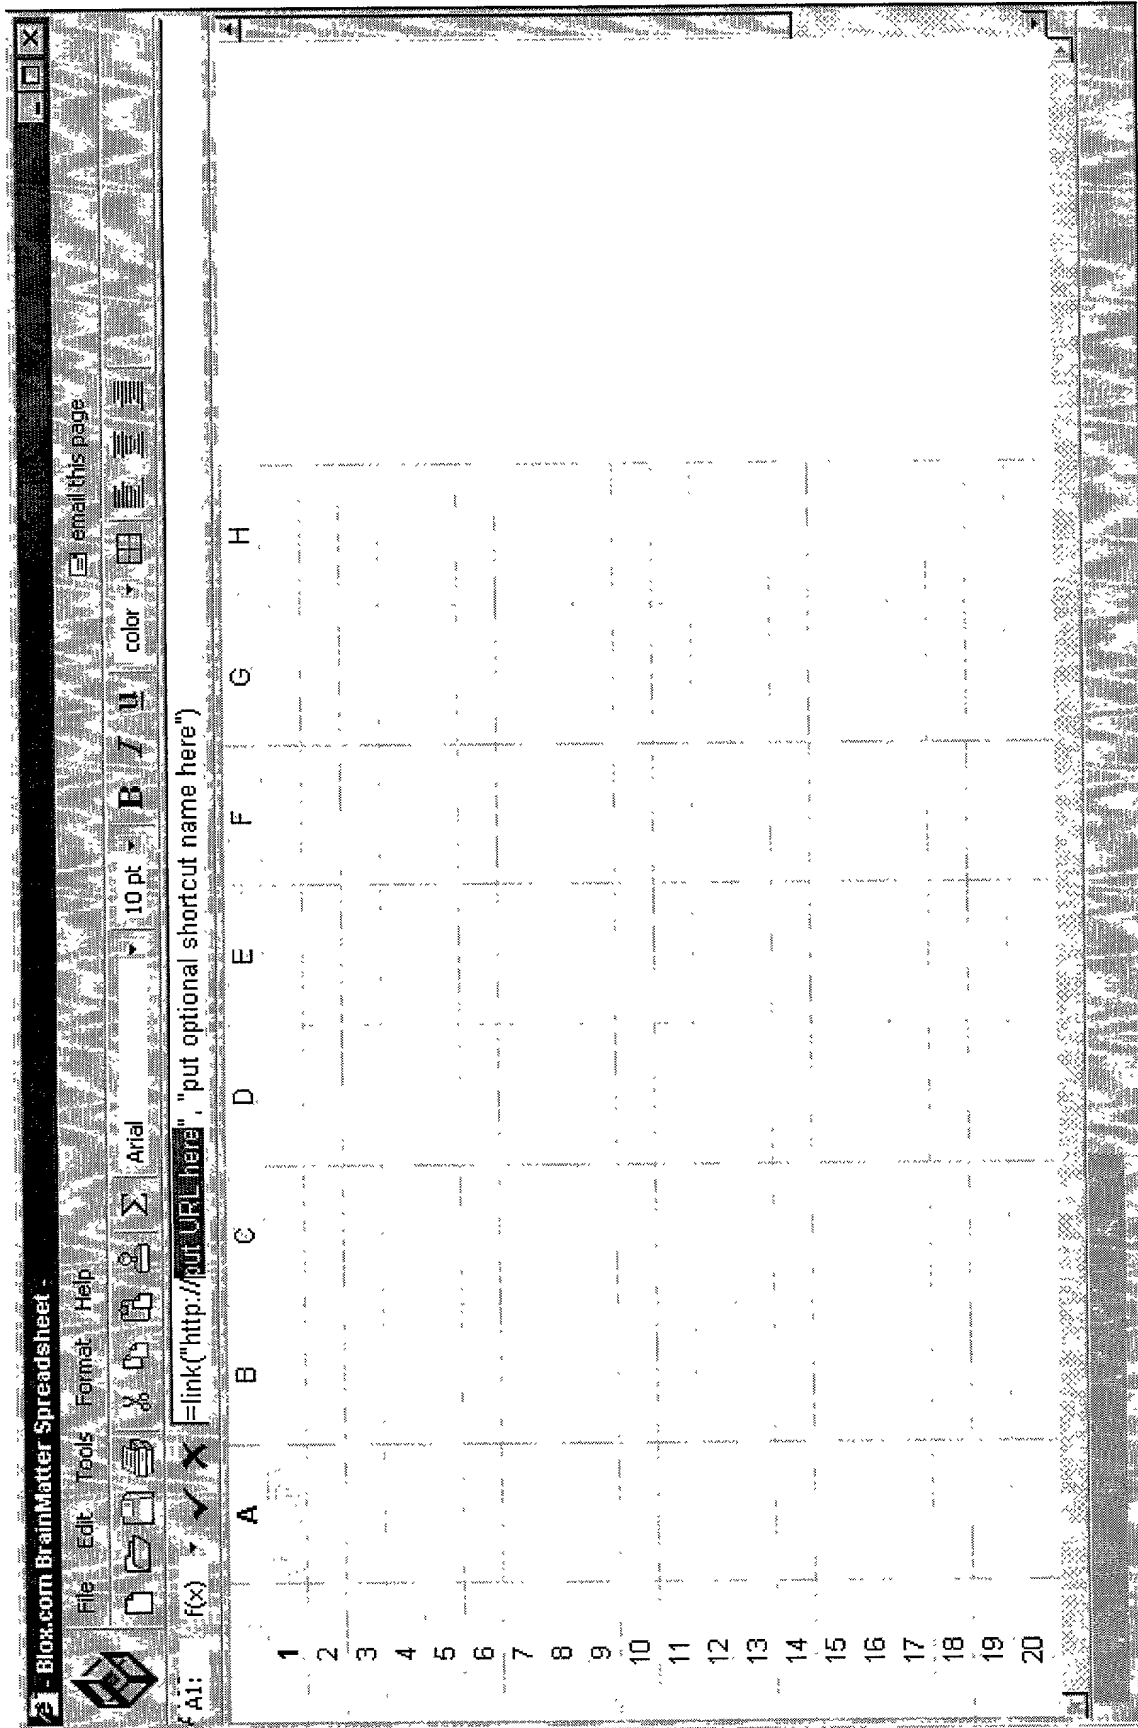


Fig. 9(a)

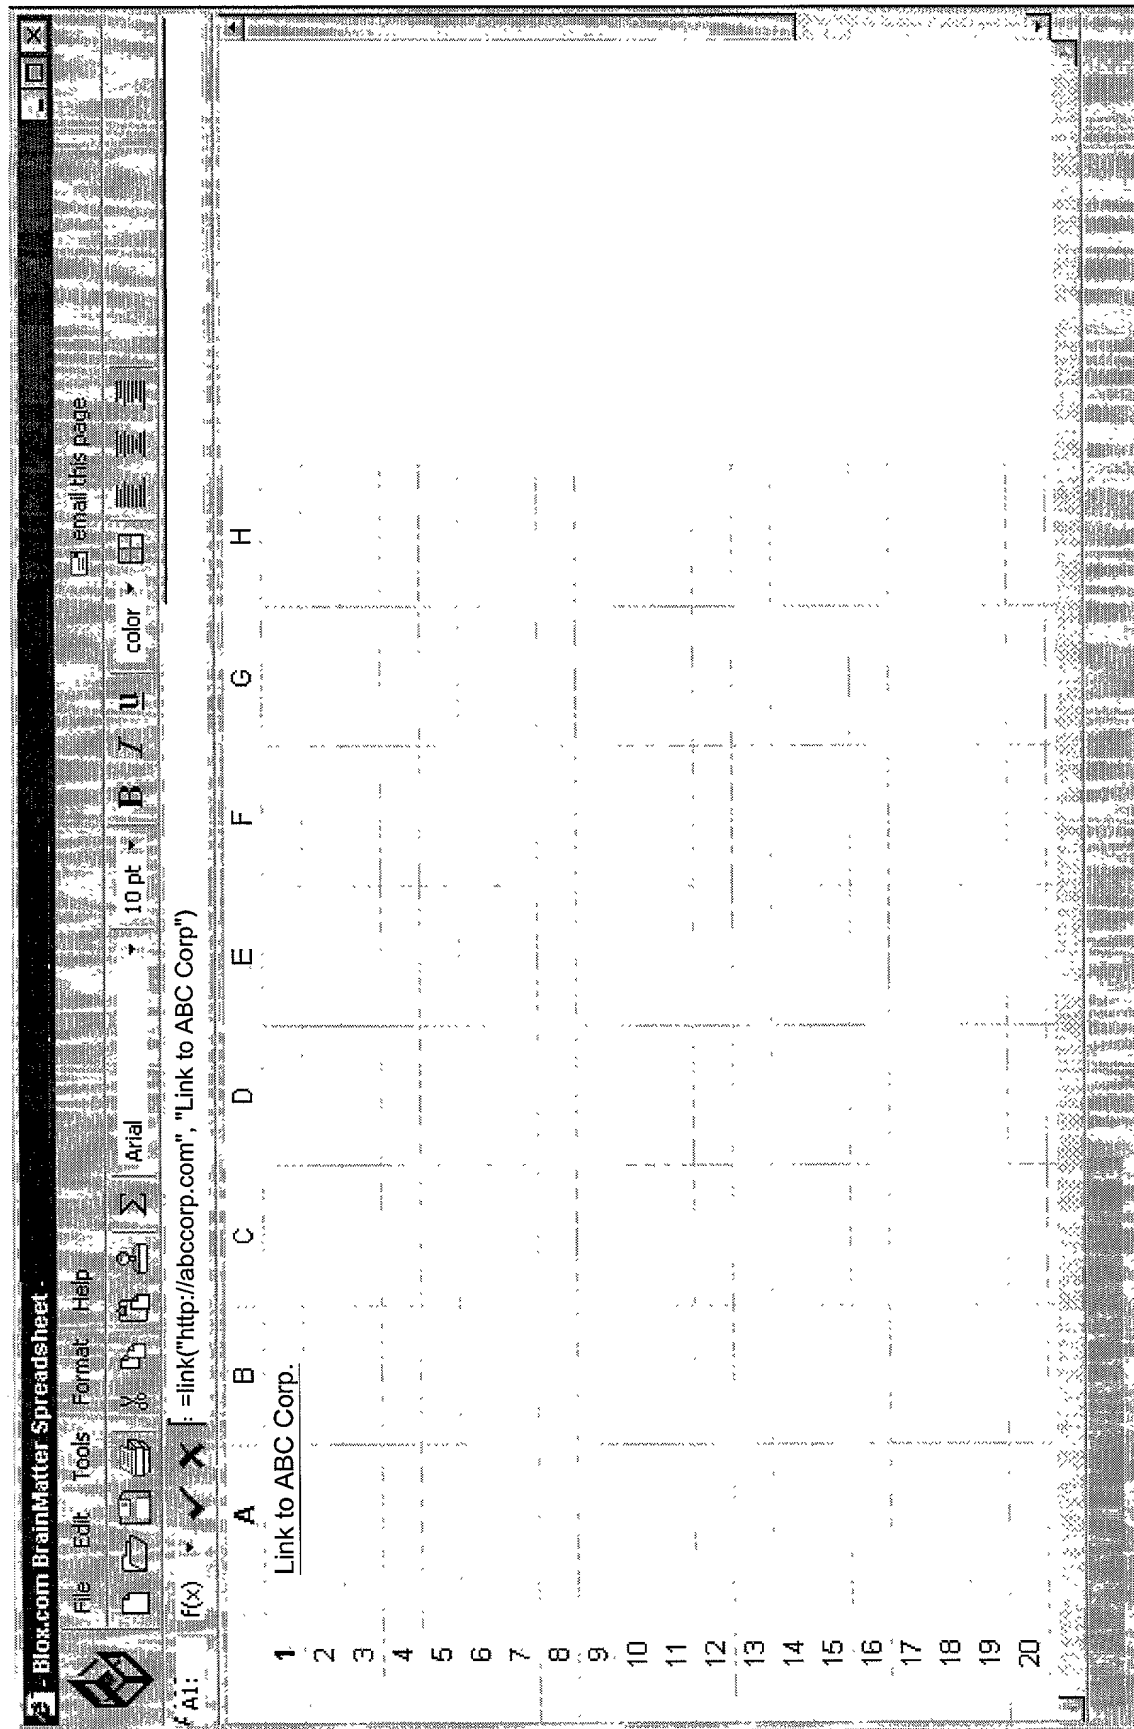


Fig. 9(b)

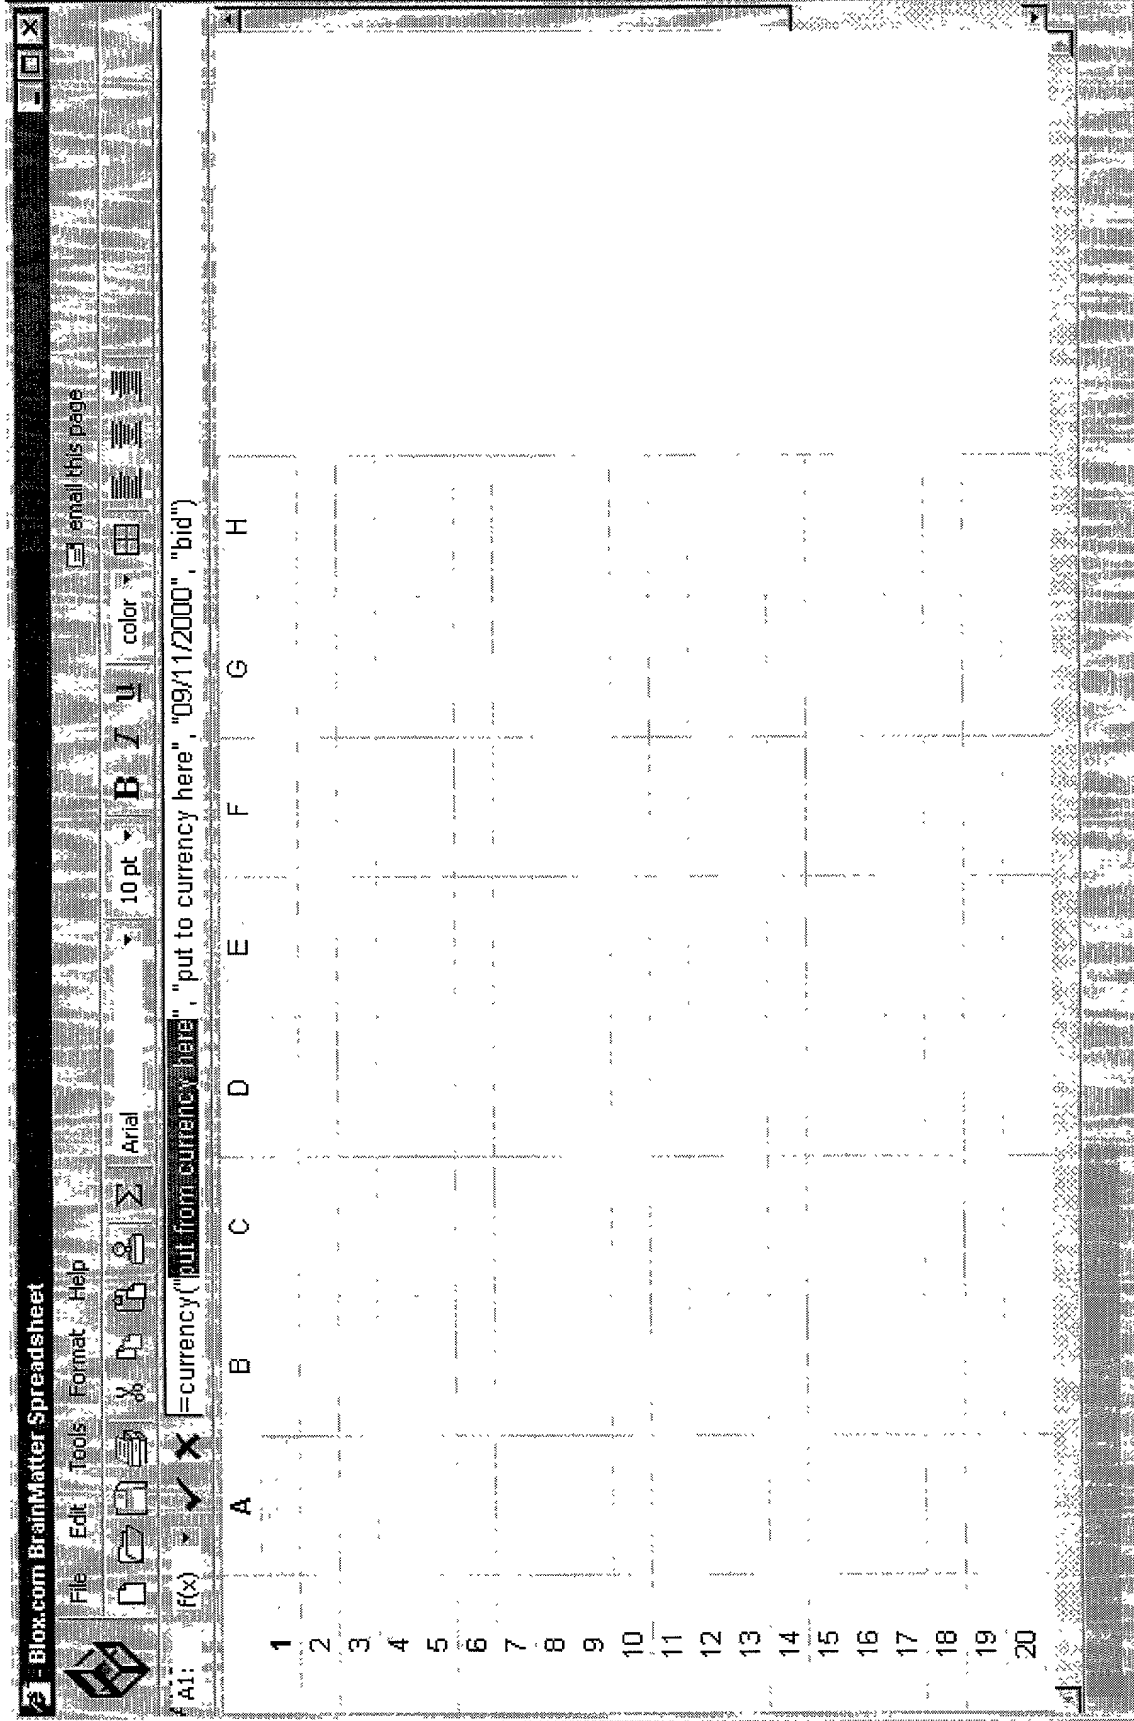


Fig. 10(a)

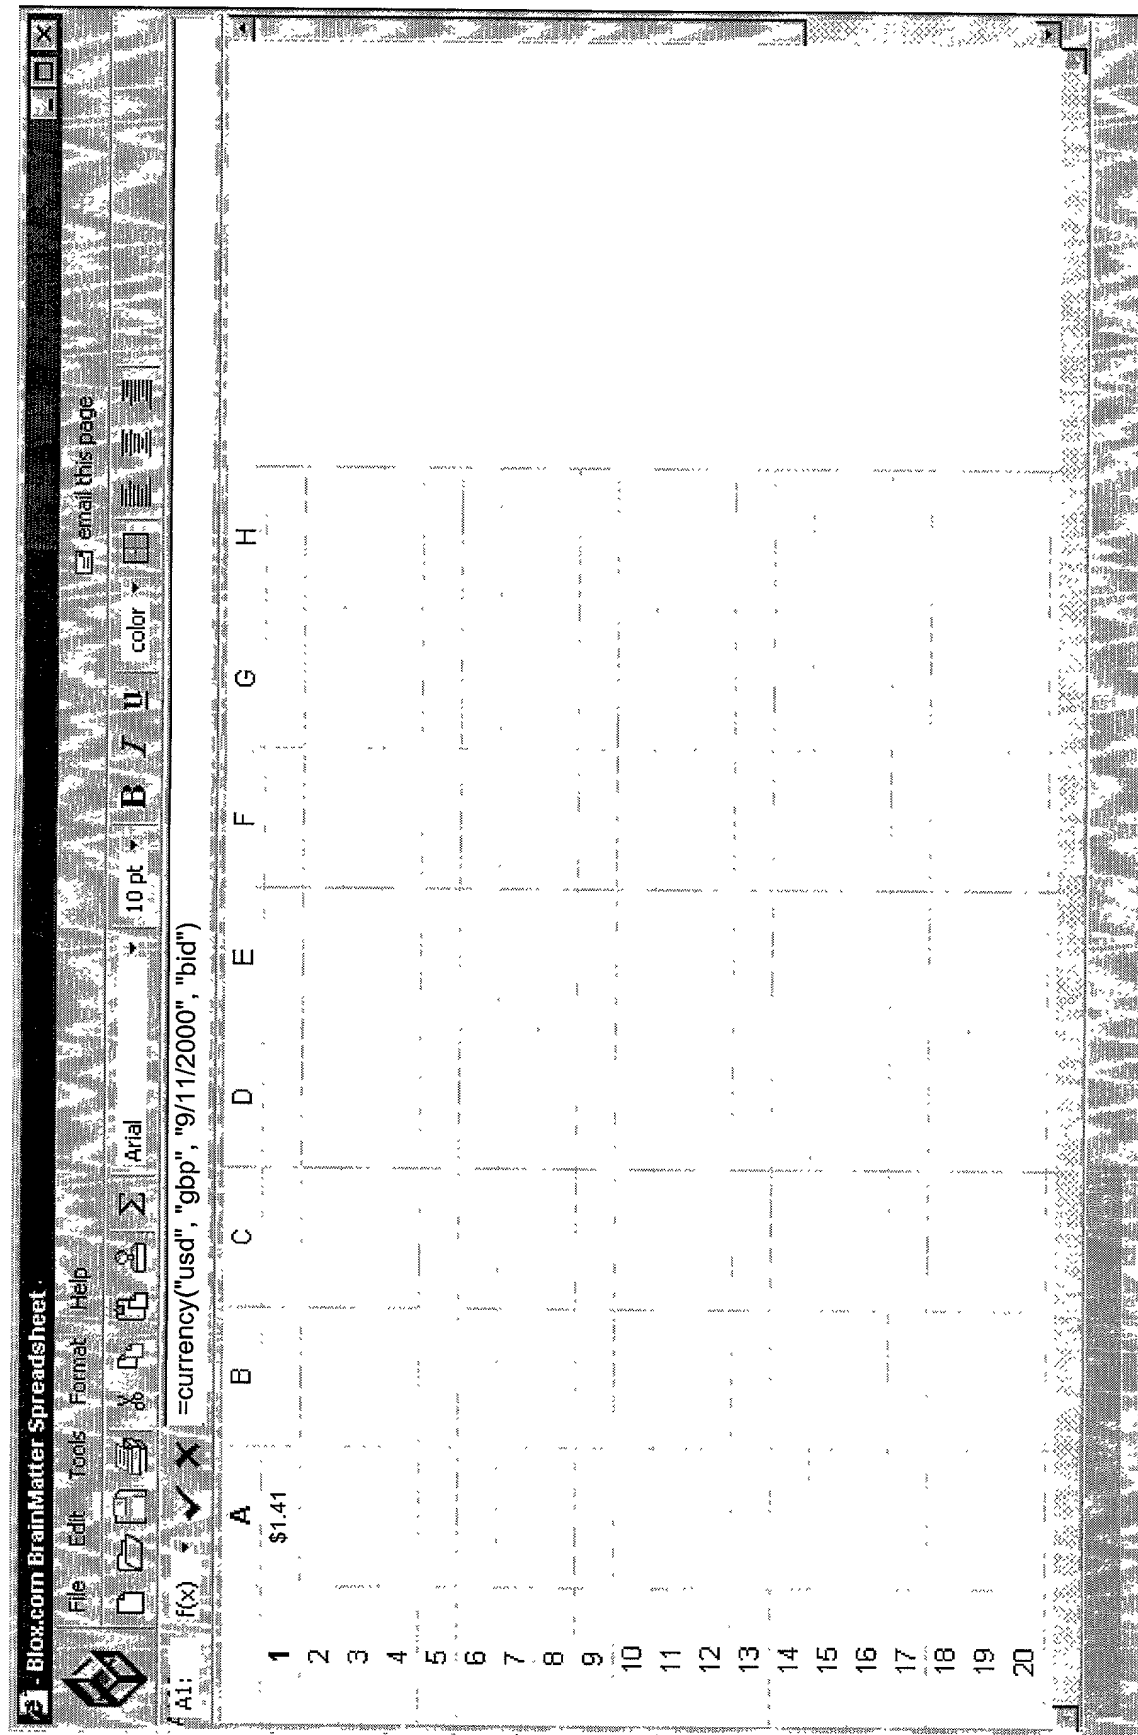


Fig. 10(b)

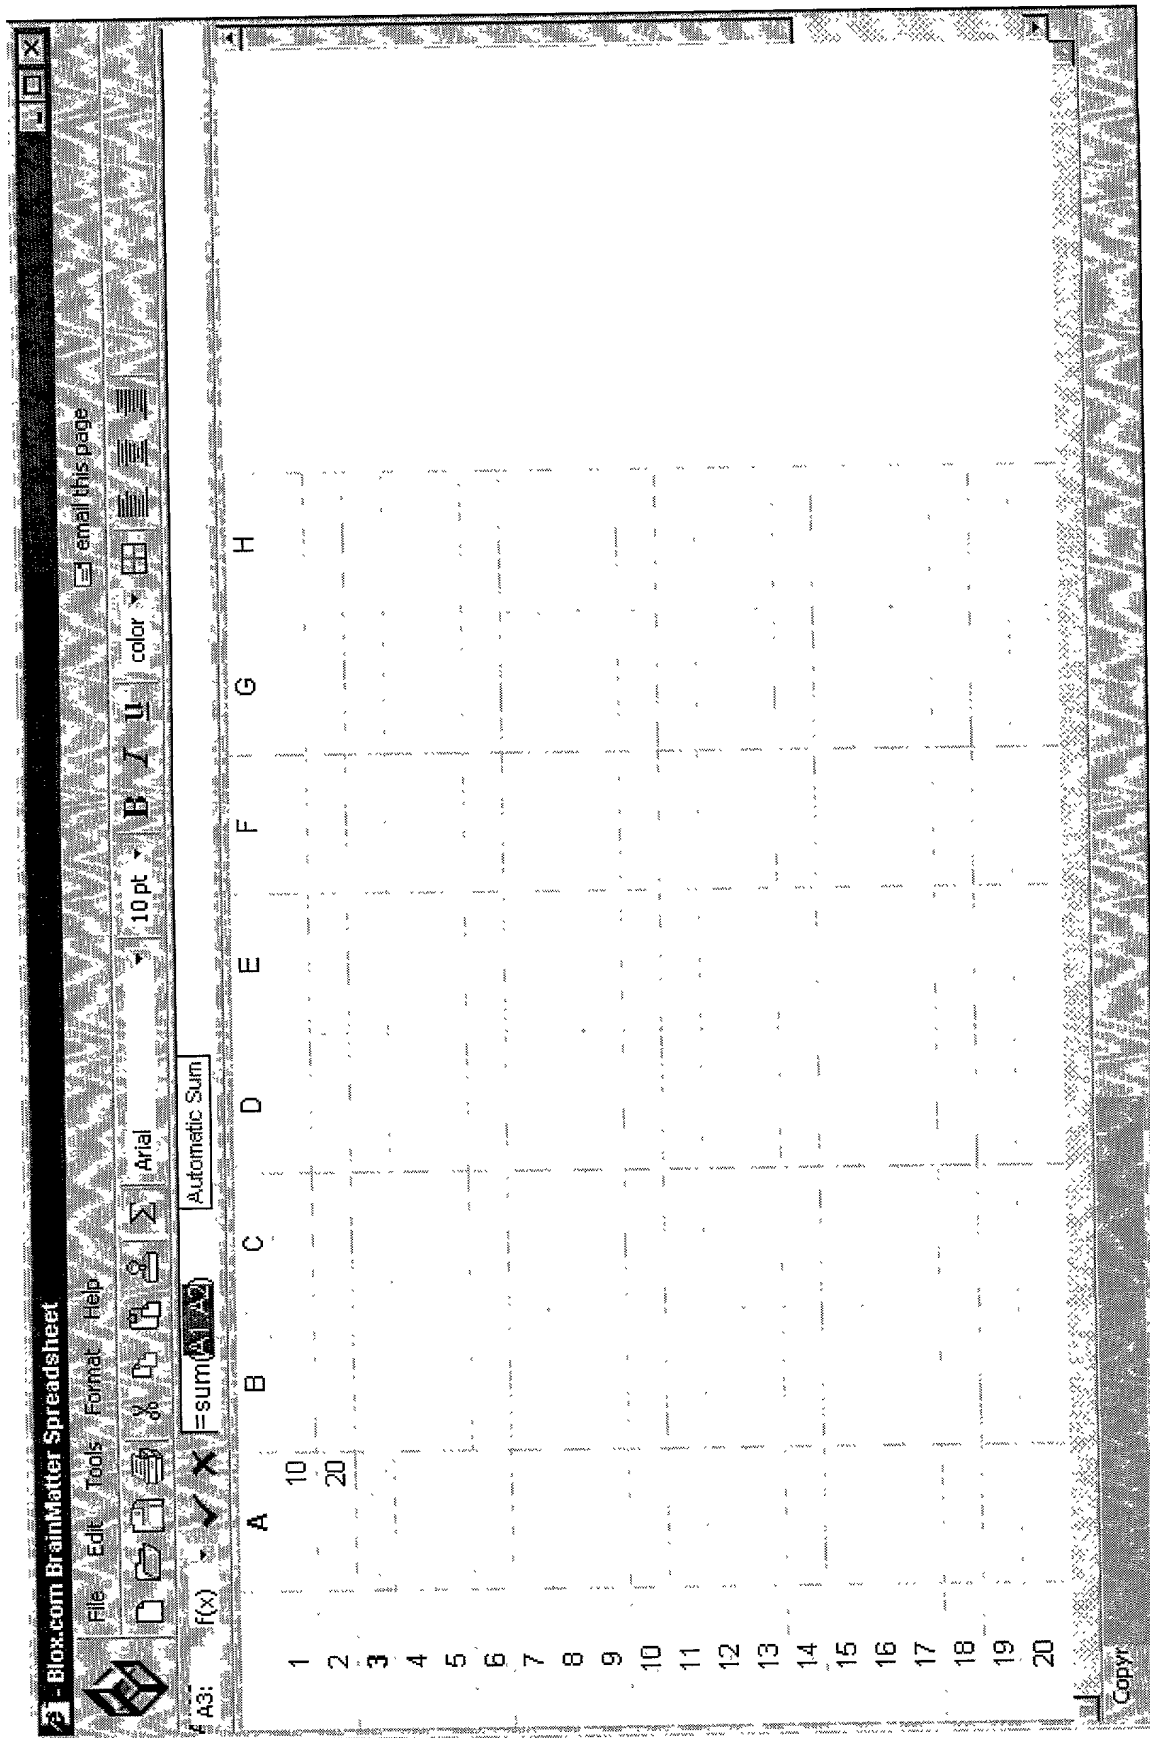


Fig. 11

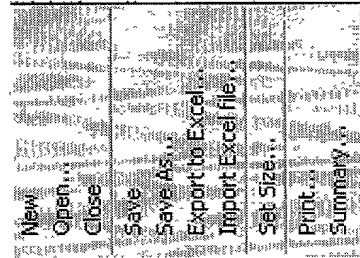


Fig. 12(a)




Fig. 12(b)

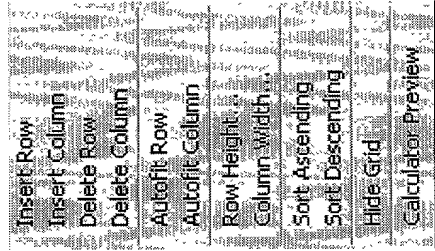


Fig. 12(c)




Fig. 12(e)

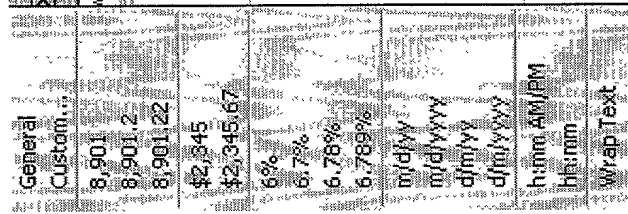


Fig. 12(d)

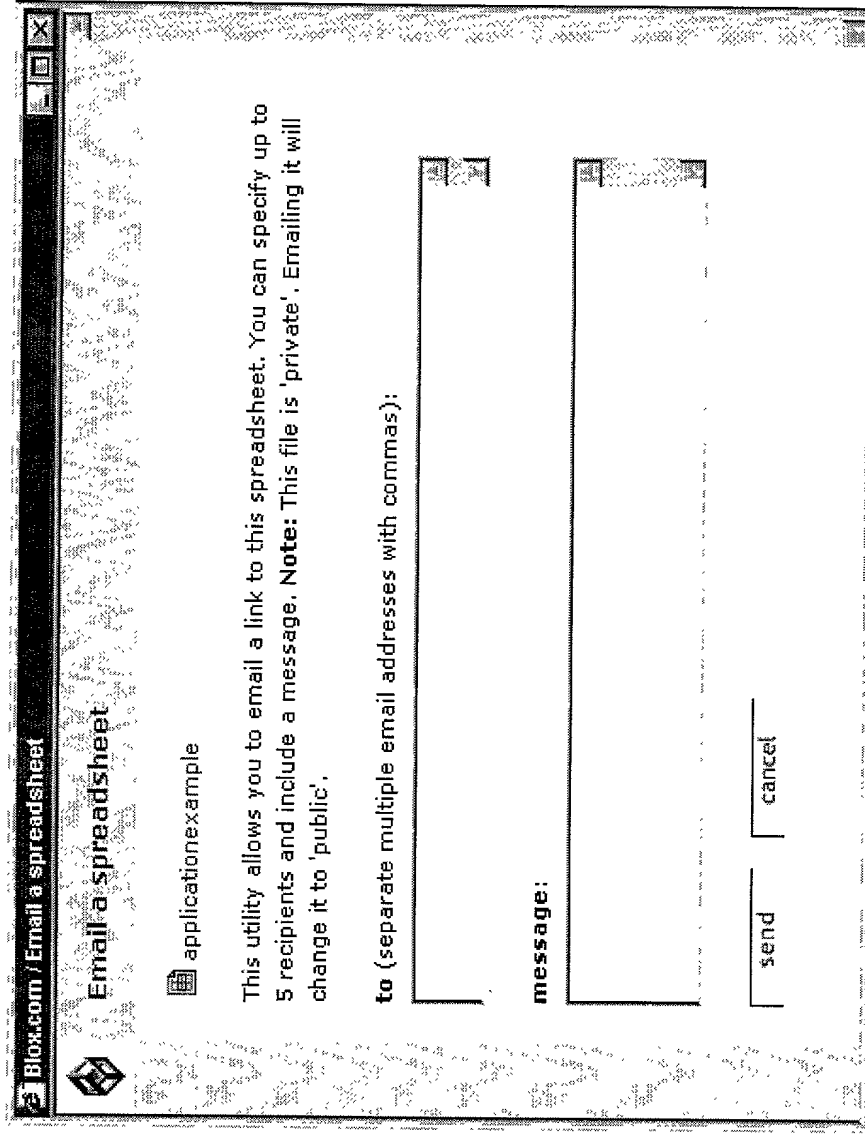


Fig. 13(a)




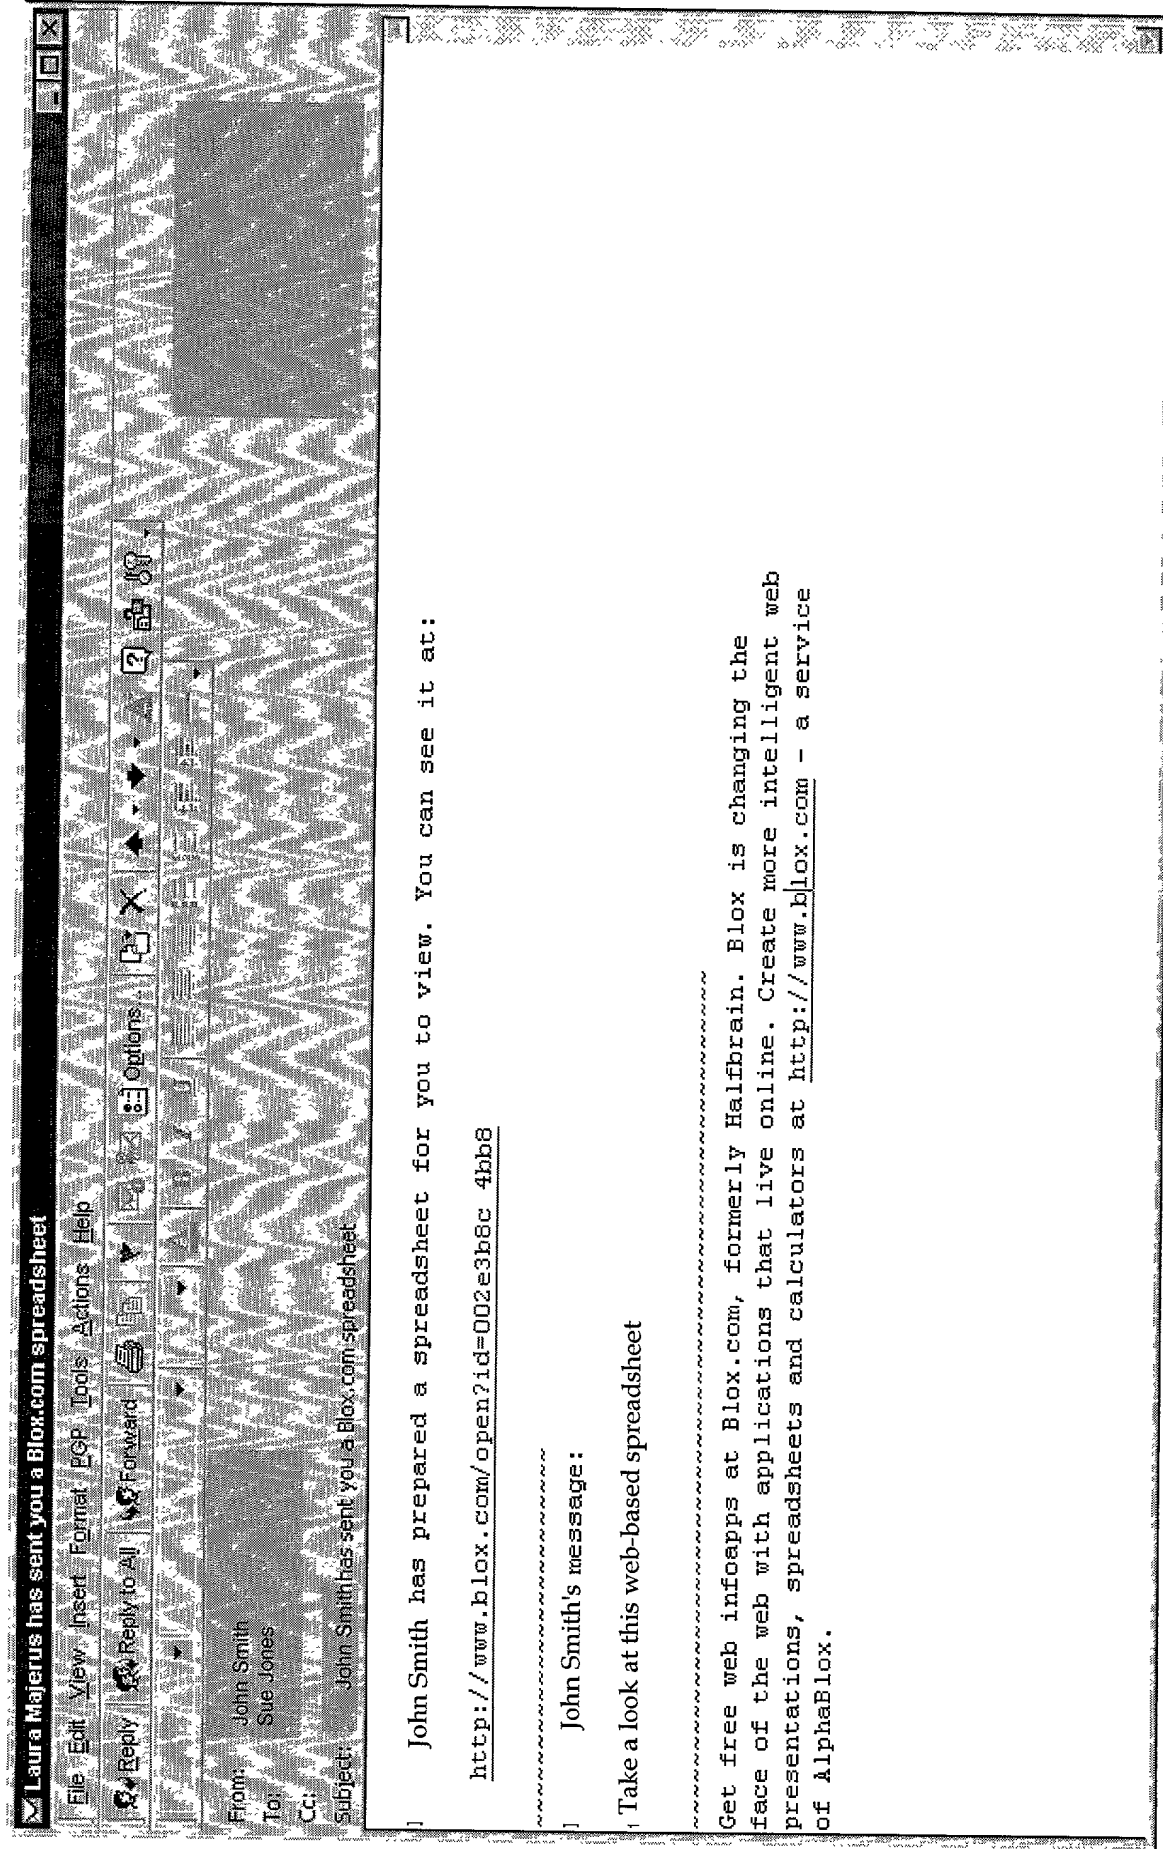


Fig. 13(b)

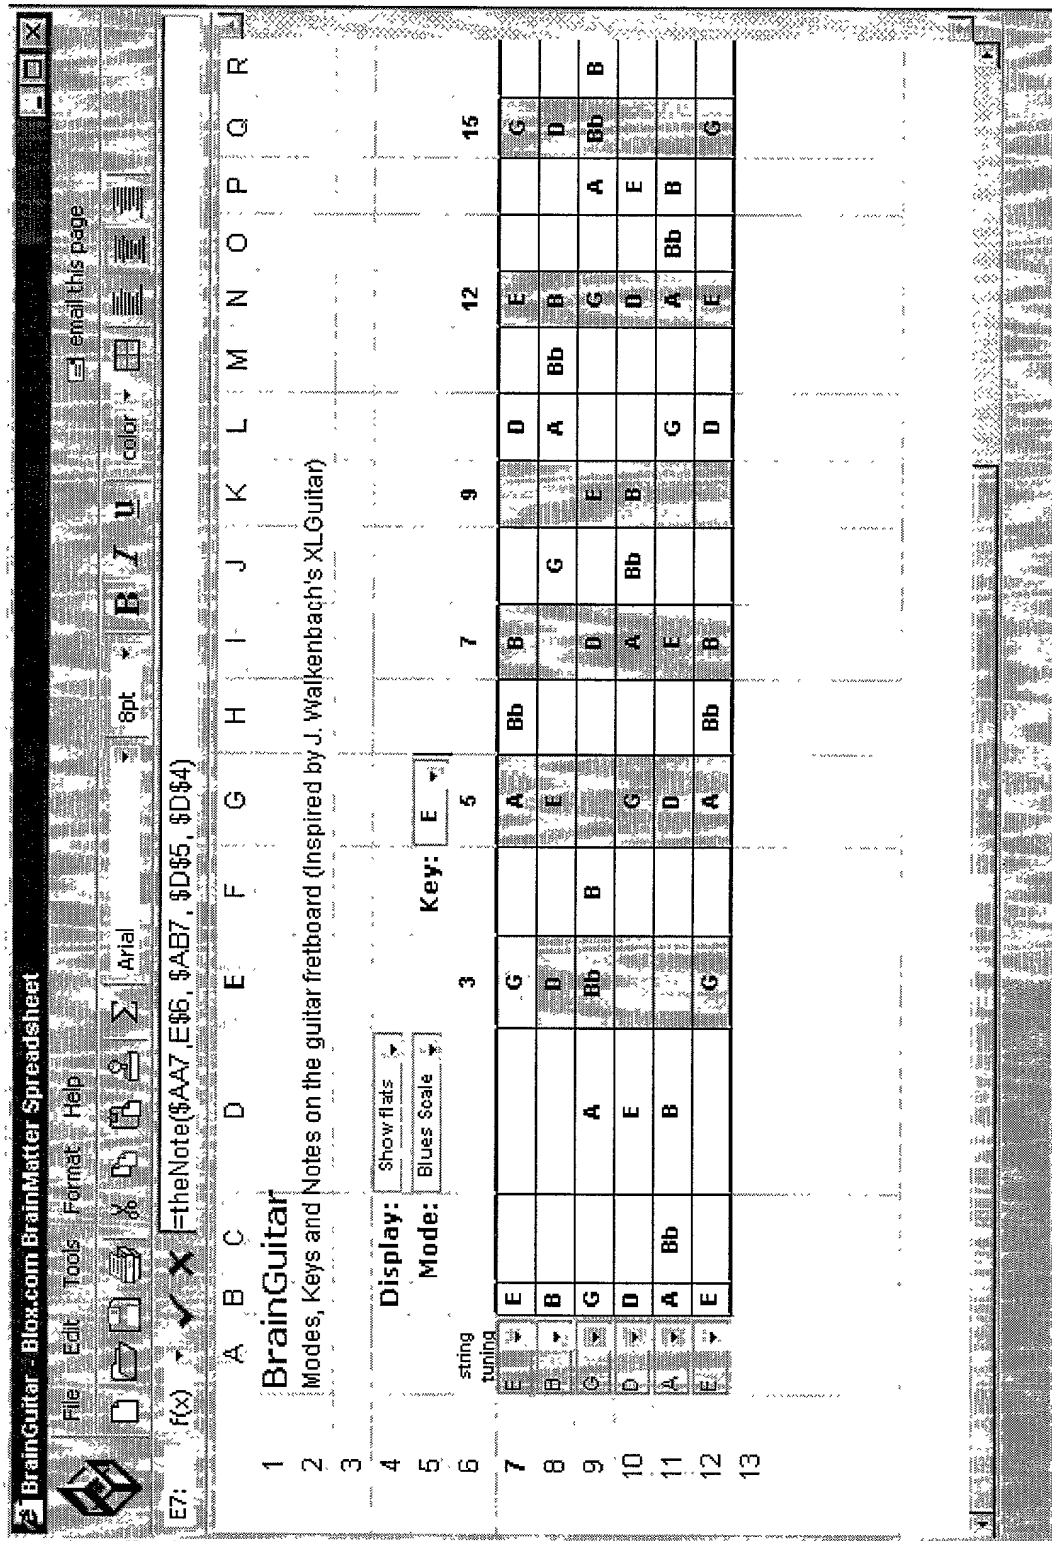

jump to function...

```

var g = new Object();
function init()
{
 g.noteArray = ["A", "A#", "B", "C", "C#", "D", "D#", "E", "F", "F#", "G", "G#", "A"];
 g.flatArray = ["A", "Bb", "B", "C", "Db", "D", "Eb", "E", "F", "Gb", "G", "Ab", "A"];
 g.modeArray = [
 // blues scale
 1, 0, 0, 1, 0, 1, 1, 0, 0, 1, 0, 0, 1, 0, 0,
 // Dorian
 1, 0, 1, 1, 0, 1, 0, 1, 0, 1, 1, 0, 1, 0, 0,
 // Harmonic Minor
 1, 0, 1, 1, 0, 1, 0, 1, 1, 0, 0, 0, 1, 0, 1,
 // Locrian
 1, 1, 0, 1, 0, 1, 1, 0, 1, 0, 1, 0, 1, 0, 0,
 // Lydian
 1, 0, 1, 0, 1, 0, 1, 1, 0, 1, 0, 1, 0, 1, 0,
]
}

```

OK Cancel Help

```

// theNote: figures out if the current note belongs in the mode,
// key and scale

function TheNote(gstring, fret, key, modeIndex, displayIndex)
{
 var noteName = call.mod(gstring+fret-1, 12);
 var inMode = g.modeArray[modeIndex*12 + call.mod(key+fret
 if(inMode == 1)
 if(displayIndex == 1)
 return(g.noteArray[noteName]);
 else if(displayIndex == 2)
 return(g.flatArray[noteName]);
 else
 return("*");
 else
 return("");
}

```

OK Cancel Help

**Fig. 14(b)**

**Fig. 14(c)**

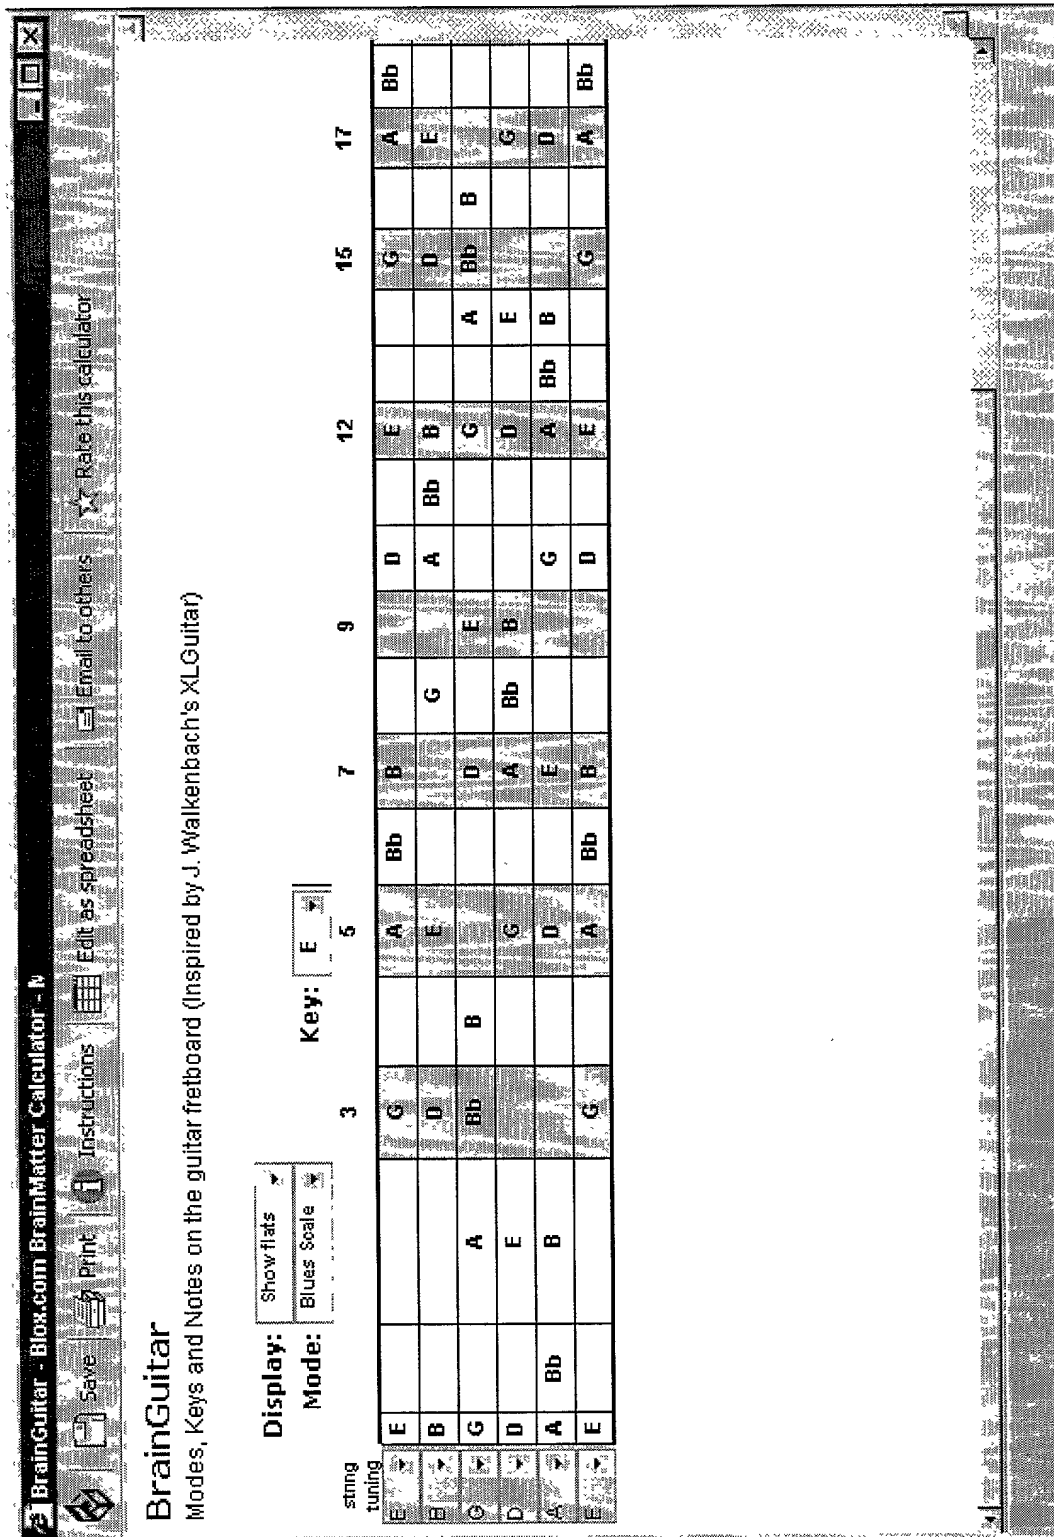
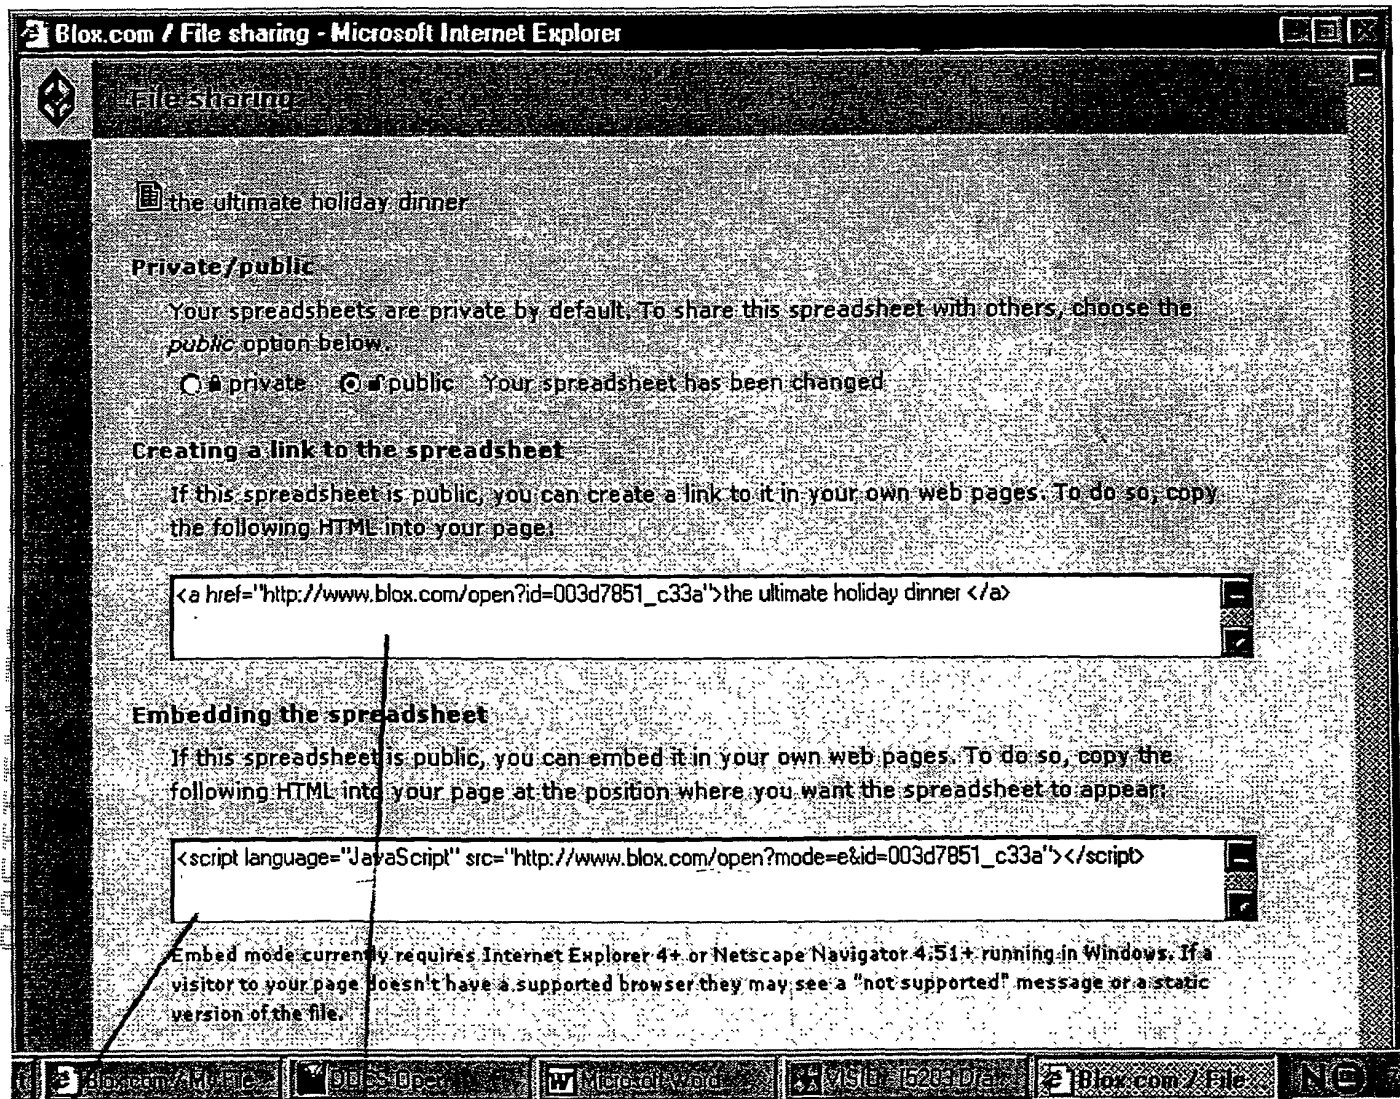
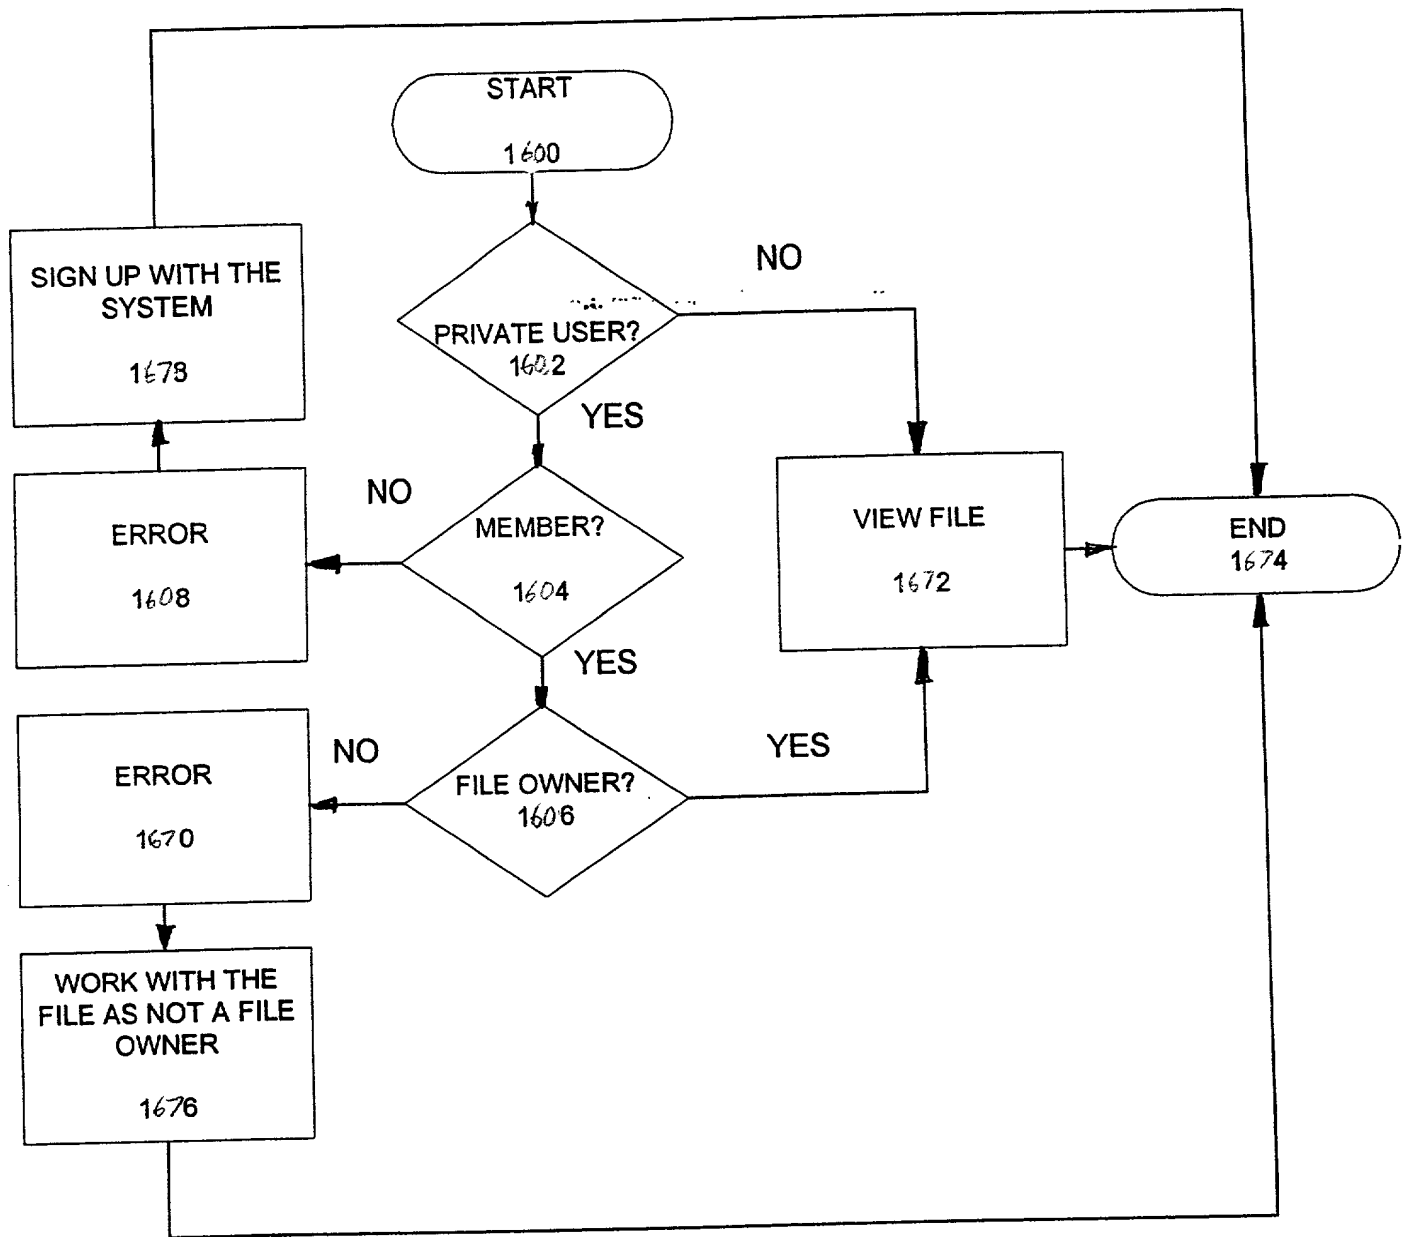


Fig. 14(d)





**FIG. 16(a)**

00574-4204260




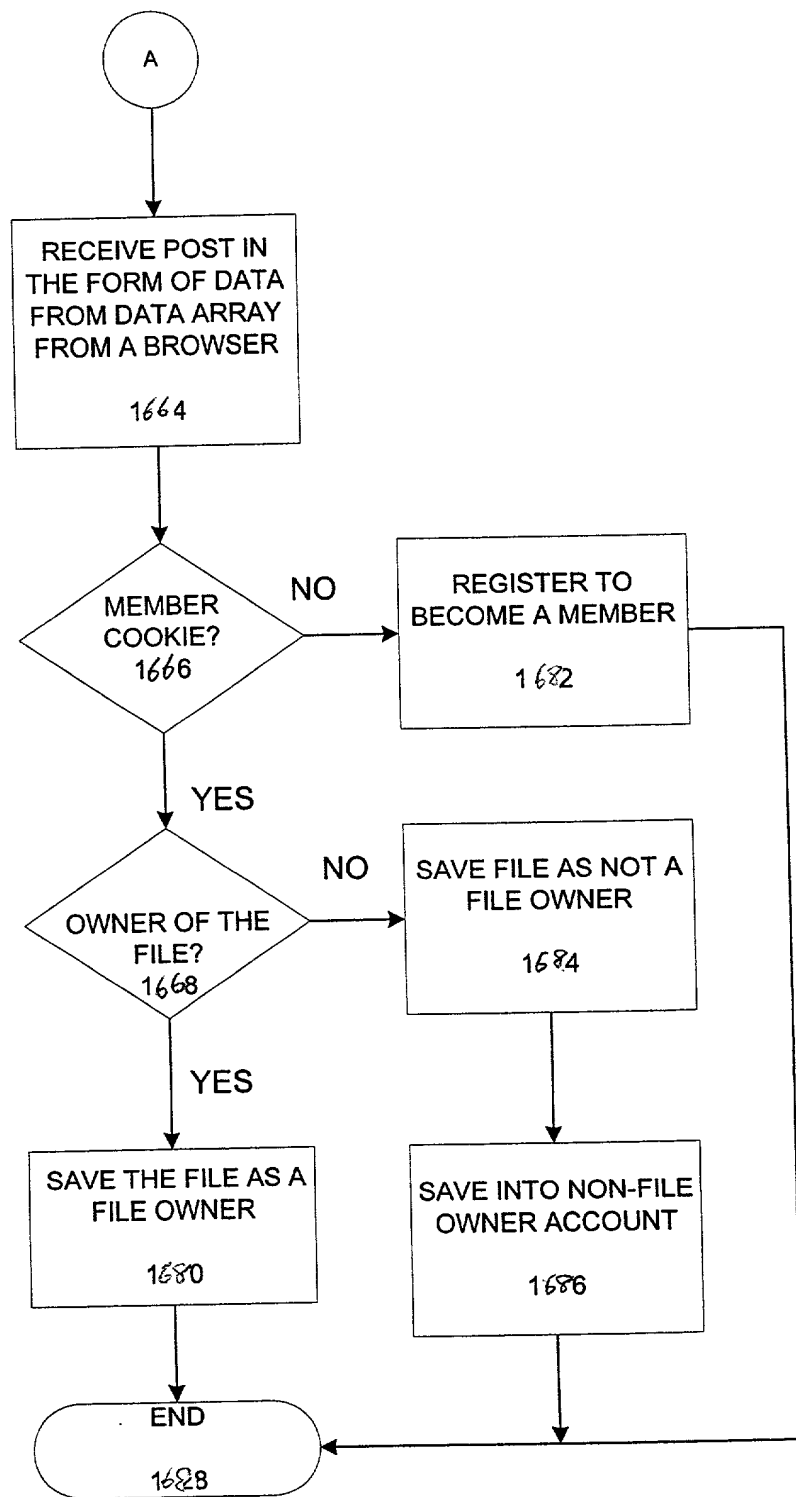


Fig 16(b)

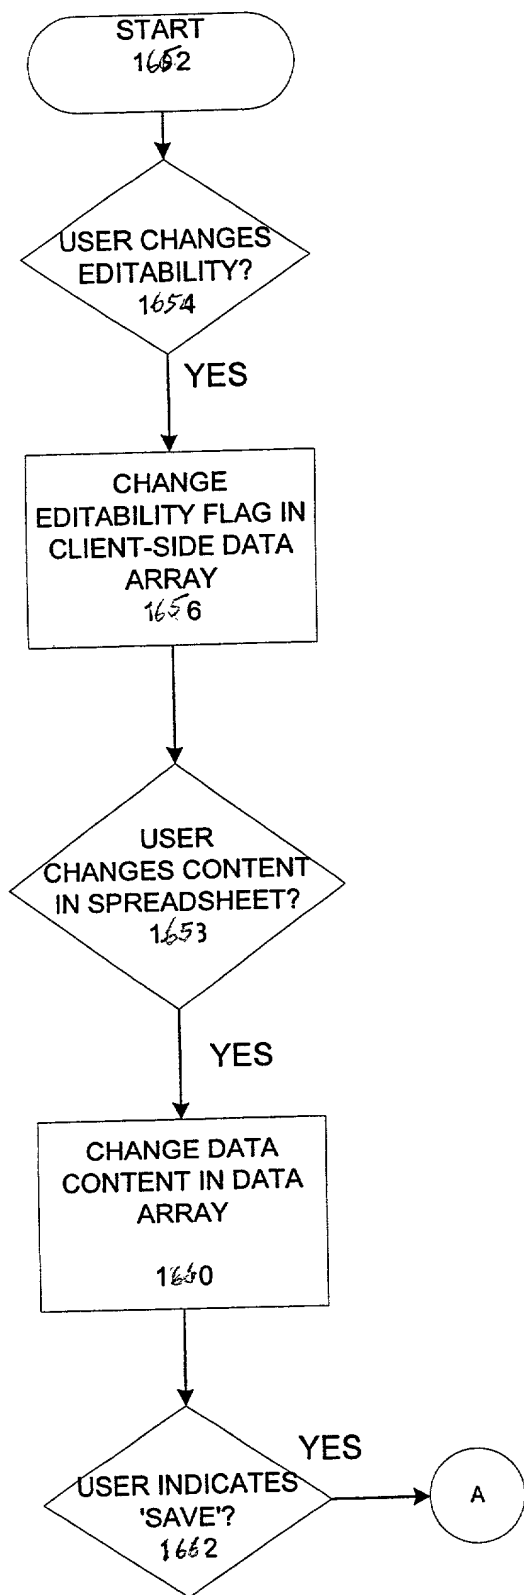

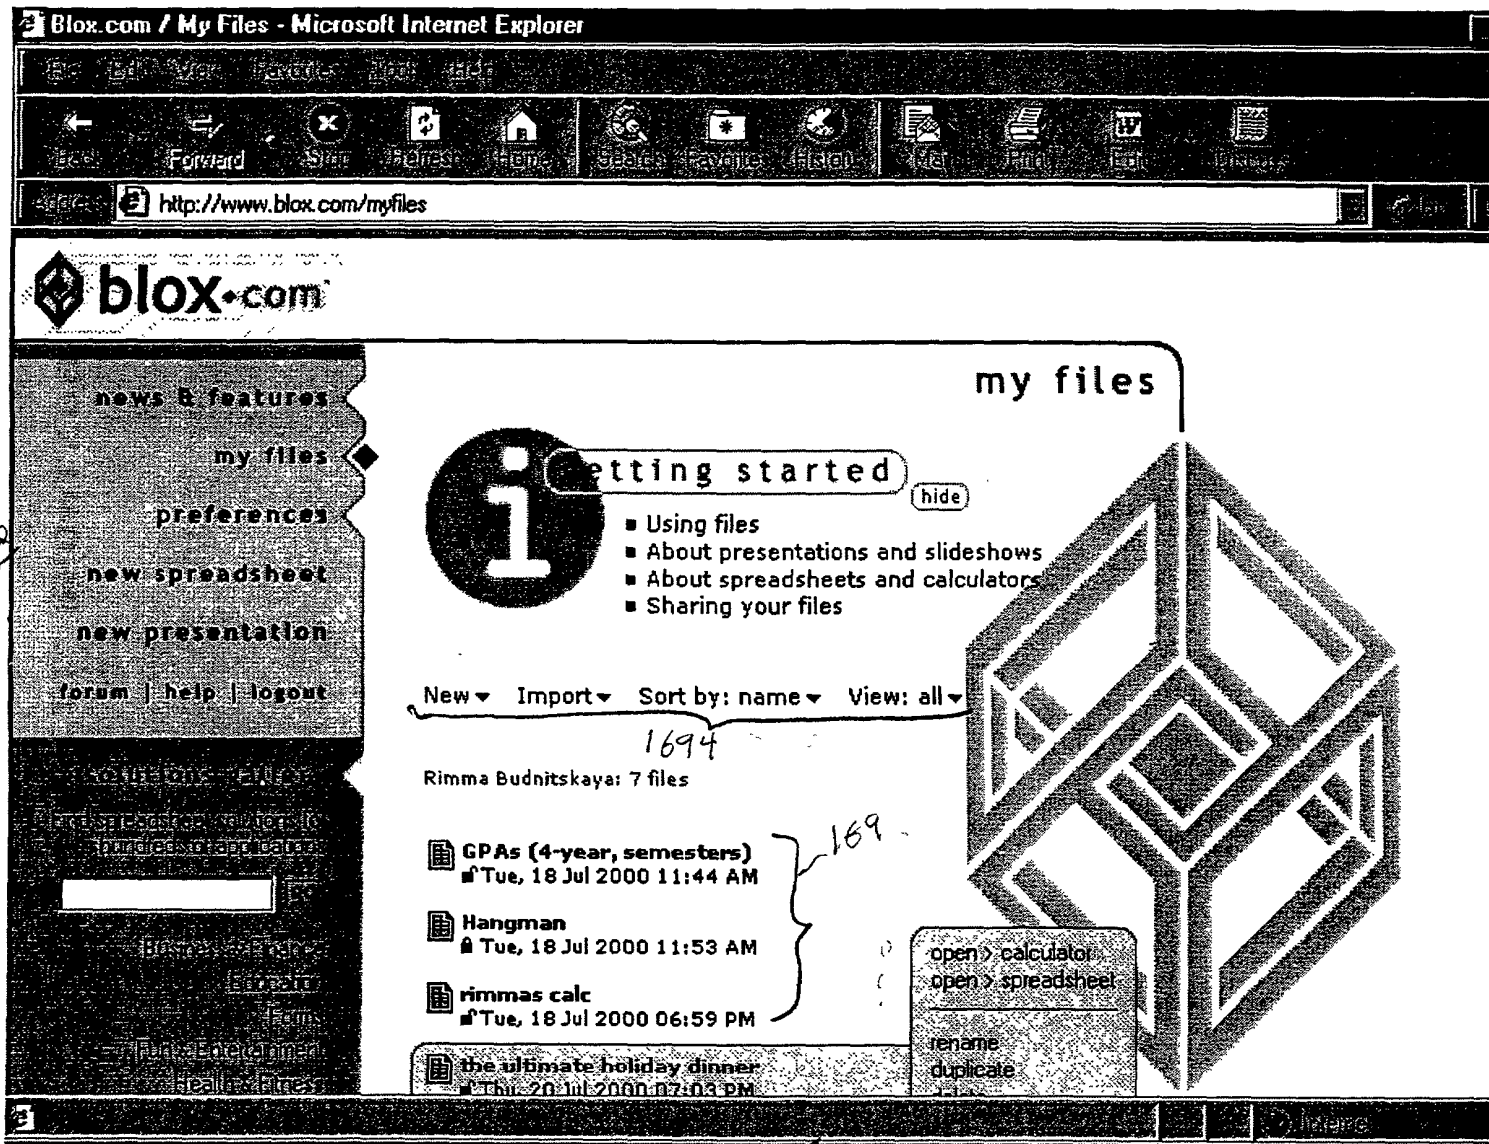


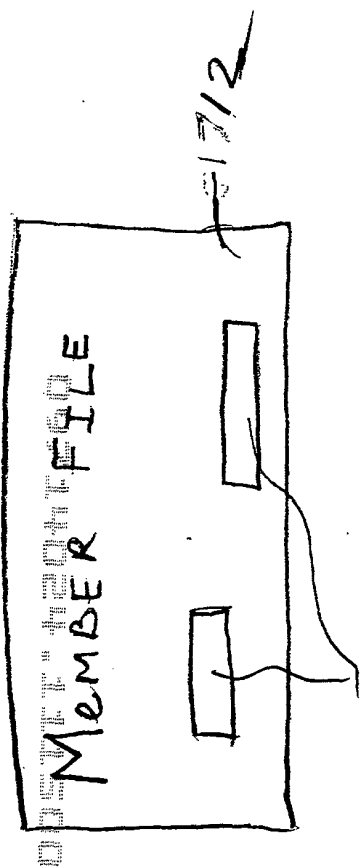

1700

MEMBER ID	password	e-mail address	data ID
Anna	0124	Anna@hotmail.com	Make the Ultimate Holiday Dinner

Fig 17(a)

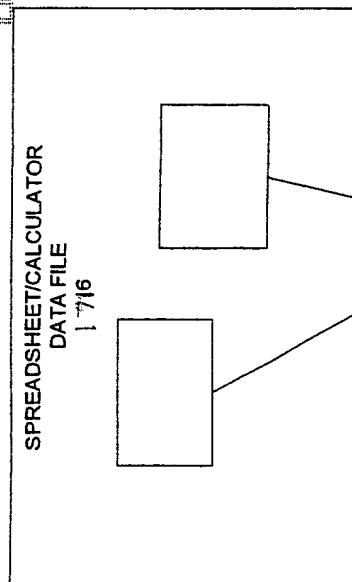

1750-

USER NAME	DATA ID	INFORMATION ABOUT EACH CELL
ANNA	HOW MANY TOTAL GUESTS ARE YOU HAVING?	<p>CELL A3:</p> <p>{ENTRY:'HOW MANY TOTAL GUESTS ARE YOU HAVING?',LOCKED:'FALSE',VIEWSIZE:'9PT',FORECOLOR:'NAVY',VIEWFAMILY:'VERDANA',WRAPTEXT:'TRUE',TEXTALIGN:'LEFT',M_ROW:3,M_COL:1,I_NR:'HOW MANY TOTAL GUESTS ARE YOU HAVING?'},</p>
	HOW MANY VEGETARIANS?	<p>CELL A5:</p> <p>{ENTRY:'HOW MANY VEGETARIANS?',LOCKED:'FALSE',VIEWSIZE:'9PT',FORECOLOR:'NAVY',VIEWFAMILY:'VERDANA',WRAPTEXT:'TRUE',TEXTALIGN:'LEFT',M_ROW:5,M_COL:1,I_NR:'HOW MANY VEGETARIANS?'},</p>

FIG. 17(b)

Currency Comparison - Blox.com BrainMatter Spreadsheet - File Edit Tools Format Help

email this page

color

9pt

Verdana

B I U

D11: f(x) X F(C11-C10)/C10

	A	B	C	D	E
1	<b>Currency Comparison</b>				
2					
3	Currency 1:		US Dollar		
4	Currency 2:		German Mark		
5	Compare starting:		3/31/00		
6	Increment every:		1 days		
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					

Date	USD/DEM	DEM/USD	% change of USD
03/31/00	\$0.49	\$2.04	
4/1/00	\$0.49	\$2.05	\$0.01
4/2/00	\$0.49	\$2.05	(\$0.00)
4/3/00	\$0.49	\$2.05	(\$0.00)
4/4/00	\$0.49	\$2.04	(\$0.00)
4/5/00	\$0.49	\$2.03	(\$0.00)
4/6/00	\$0.49	\$2.03	(\$0.00)
4/7/00	\$0.49	\$2.04	\$0.01
4/8/00	\$0.49	\$2.05	\$0.00
4/9/00	\$0.49	\$2.05	\$0.00

Currency symbol table

Copyright © 1999-2000 AlphaBlox Corporation Inc.™

Fig. 18

<b>0010/PTO</b> Rev. 6/95  <b>U.S. Department of Commerce</b> Patent and Trademark Office  <b>DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION</b>  <input checked="" type="checkbox"/> Declaration Submitted with Initial Filing      OR <input type="checkbox"/> Declaration Submitted after Initial Filing	Attorney Docket Number	<b>5202 US</b>
	First Named Inventor	<b>Guttman</b>
	<i>COMPLETE IF KNOWN</i>	
	Application Number	<b>To Be Assigned</b>
	Filing Date	<b>Herewith</b>
	Group Art Unit	<b>To Be Assigned</b>
	Examiner Name	<b>To Be Assigned</b>

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**CLIENT SIDE, WEB-BASED SPREADSHEET**

the specification of which

*(Title of the Invention)*

☒ is attached hereto

OR

☐ was filed on (MM/DD/YYYY) [ ] as United States Application Number or PCT International Application Number [ ] and was amended on (MM/DD/YYYY) [ ] (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations. § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code § 119 (a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365 (a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority	Certified Copy Attached?	
			Not Claimed	YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority sheet attached hereto:

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.		
Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental sheet attached hereto.
<b>60/241,083</b>	<b>10/16/2000</b>	

DECLARATION			Page 2
I hereby claim the benefit under Title 35, United States Code § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.			
U.S. Parent Application Number	PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
<input type="checkbox"/> Additional U.S. or PCT international application numbers are listed on a supplemental priority sheet attached hereto.			

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:			
Name	Registration Number	Name	Registration Number
Greg T. Sueoka	33,800		
Laura A. Majerus	33,417		
Charles E. Schulman	43,350		
Deepti Panchawagh-Jain	43,846		
<input type="checkbox"/> Additional attorney(s) and/or agent(s) named on a supplemental sheet attached hereto.			
Please direct all correspondence to:			
<p style="text-align: center;"> <b>Laura A. Majerus</b>  <b>Fenwick &amp; West LLP</b>  <b>Two Palo Alto Square</b>  <b>Palo Alto, CA 94306</b>  <b>U.S.A.</b> </p>			
Telephone	(650) 858-7152	Fax	(650) 494-1417

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

<b>Name of Sole or First Inventor:</b>		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name	Steve	Middle Initial		Family Name	Guttman	Suffix e.g. Jr.	
Inventor's Signature					Date		
Residence: City	San Francisco	State	CA	Country	USA	Citizenship	US
Mailing Address							
City	San Francisco	State	CA	Zip	94111	Country	USA
<input type="checkbox"/> Additional inventors are being named on supplemental sheet(s) attached hereto							

DECLARATION				ADDITIONAL INVENTOR(S) Supplemental Sheet			
<b>Name of Additional Joint Inventor, if any:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name	Joseph	Middle Initial		Family Name	Ternasky	Suffix e.g. Jr.	
Inventor's Signature					Date		
Residence: City	Mountain View	State	CA	Country	USA	Citizenship	US
Mailing Address	450 Sierra Vista Avenue, Apt. #6						
Mailing Address							
City	Mountain View	State	CA	Zip	94043	Country	USA

<b>Name of Additional Joint Inventor, if any:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name		Middle Initial		Family Name		Suffix e.g. Jr.	
Inventor's Signature					Date		
Residence: City		State		Country		Citizenship	
Mailing Address							
Mailing Address							
City		State		Zip		Country	

<b>Name of Additional Joint Inventor, if any:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name		Middle Initial		Family Name		Suffix e.g. Jr.	
Inventor's Signature					Date		
Residence: City		State		Country		Citizenship	
Mailing Address							
Mailing Address							
City		State		Zip		Country	

<b>Name of Additional Joint Inventor, if any:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name		Middle Initial		Family Name		Suffix e.g. Jr.	
Inventor's Signature					Date		
Residence: City		State		Country		Citizenship	
Mailing Address							
Mailing Address							
City		State		Zip		Country	
<input type="checkbox"/> Additional inventors are being named on supplemental sheet(s) attached hereto							